

# 430107

Product Sheet

# ares

THE OUTDOOR BY FLOS

ARES s.r.l - Socio Unico

v.le dell'Artigianato n.24 - 20881 Bernareggio - MB (Italy)

www.aresill.net - flos.outdoor@flos.com

## Pat


Luminaire for installation on wall or on ceiling - surface mounted. Configuration: die-cast aluminium structure, EN AB-47100 alloy (low copper content). Polycarbonate diffuser: opal, self-extinguishing. Double layer coating for high resistance to corrosion: the aluminium components are painted with a double coat using powders that are compliant with QUALICOAT standards: a first layer of epoxy powder (with excellent chemical and mechanical resistance) and a second finishing layer of polyester powder (resistant to UV rays and atmospheric agents). The entire painting process of the aluminium fitting starts from components that have been sandblasted in advance to make the surface more porous and increase the adherence of the paint. Ares effects alkaline and acid washing to clean the surfaces completely, then rinses with demineralised water to remove any residue particles, subsequently a chemical conversion treatment is done to protect against rusting. Protection rating: IP65. In compliance with EN 60598-1 standards. Class of insulation: I. Installation: Mini Pat: wiring through one rubber cable gland (5mm-<math>\varnothing</math>-<math><9\text{mm}</math> cables); Pat - Maxi Pat: wiring through a rubber cable holder (5mm-<math>\varnothing</math>-<math><10\text{mm}</math> cables). Outdoor use requires suitable flexible cables assuring the watertightness of the cable gland / cable holder.

IP65   

### Available Colors for this Version



## Pat / Visor

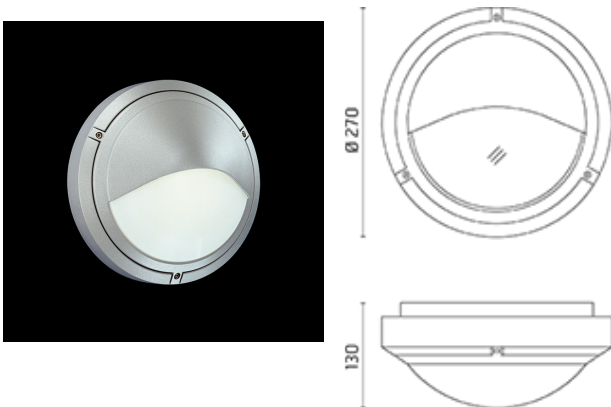

## Warnings

### Wall



Ceiling fitting



Wall fitting



The fitting is equipped with 1 cable input



Protection against impact. IK 09 - 10,00 joule



Glow wire test: 850°C

## Light Flux, Placement



## Product Code Details

# 430107

Light Source



QT 32 100W E27



## Accessories

---

This product has no accessories