

455923

Product Sheet

ares

THE OUTDOOR BY FLOS

ARES s.r.l - Socio Unico


v.le dell'Artigianato n.24 - 20881 Bernareggio - MB (Italy)

www.aresill.net - flos.outdoor@flos.com

Pat

Luminaire for installation on wall or on ceiling - surface mounted. Configuration: die-cast aluminium structure, EN AB-47100 alloy (low copper content). Polycarbonate diffuser: opal, self-extinguishing. Double layer coating for high resistance to corrosion: the aluminium components are painted with a double coat using powders that are compliant with QUALICOAT standards: a first layer of epoxy powder (with excellent chemical and mechanical resistance) and a second finishing layer of polyester powder (resistant to UV rays and atmospheric agents). The entire painting process of the aluminium fitting starts from components that have been sandblasted in advance to make the surface more porous and increase the adherence of the paint. Ares effects alkaline and acid washing to clean the surfaces completely, then rinses with demineralised water to remove any residue particles, subsequently a chemical conversion treatment is done to protect against rusting. Protection rating: IP65. In compliance with EN 60598-1 standards. Class of insulation: I. Installation: Mini Pat: wiring through one rubber cable gland (5mm<Ø<9mm cables); Pat - Maxi Pat: wiring through a rubber cable holder (5mm<Ø<10mm cables). Outdoor use requires suitable flexible cables assuring the watertightness of the cable gland / cable holder.

Pat / Emergency (Autonomy: 1h 30 min) - The emergency unit and the power supply unit have a common neutral

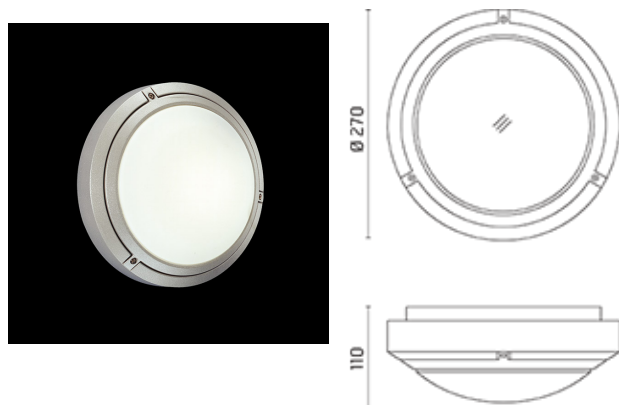

Product Code Details

455923

Light Source




TC-DEL 18W G24q-2
Electronic ballast



IP65   

Available Colors for this Version

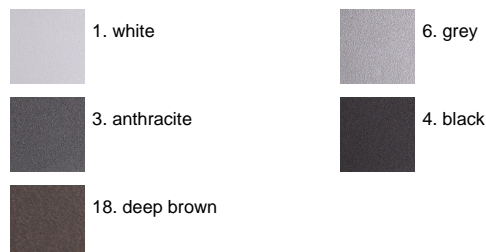

Warnings

Wall/Ceiling



Ceiling fitting



Wall fitting



The fitting is equipped with 1 cable input



Protection against impact.
IK 09 - 10,00 joule



Glow wire test: 850°C

Light Flux, Placement



Accessories

This product has no accessories