

503004

Product Sheet

ares

THE OUTDOOR BY FLOS


ARES s.r.l - Socio Unico
v.le dell'Artigianato n.24 - 20881 Bernareggio - MB (Italy)
www.aresill.net - flos.outdoor@flos.com

Talia


Bollard light. Configuration: extruded aluminium structure. Polycarbonate diffuser: opal UV-stabilised. Double layer coating for high resistance to corrosion: the aluminium components are painted with a double coat using powders which are compliant with QUALICOAT standards: a first layer of epoxy powder (with excellent chemical and mechanical resistance) and a second finishing layer of polyester powder (resistant to UV rays and atmospheric agents). The entire painting process of the aluminium fitting starts from components which have been sandblasted in advance to make the surface more porous and increase the adherence of the paint. Ares effects alkaline and acid washing to clean the surfaces completely, then rinses with demineralised water to remove any residue particles, subsequently a chemical conversion treatment is done to protect against rusting. Protection rating: IP65 In compliance with EN 60598-1 standards Class of insulation: II Installation: The LED module is housed in a sealed transparent polycarbonate cylinder with compensation valve. The luminaire is equipped with a piece of cable and a wiring kit with crimp connectors and an adhesive heat-shrink tubing for a watertight electrical connection. We recommend installation on a concrete basement or surface, directly with bolts or through the dedicated fixing plate (to be ordered separately). Outdoor use requires suitable flexible cables. We recommend the use of a connection system with a protection degree greater than or equal to the protection degree of the luminaire.

IP65  

Available Colors for this Version

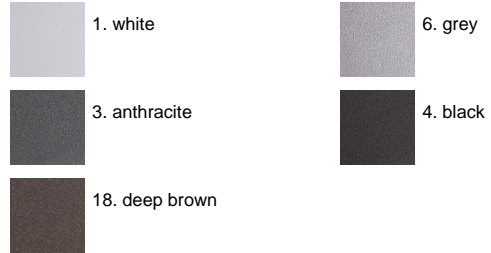

Talia Low Power LED / H. 560 mm - Double Emission

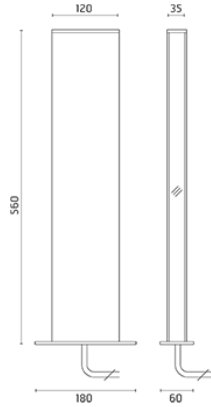

Warnings

Bollard



Bollard light



Pre-wired with approx 200mm of cable



Protection against impact.
IK 08 - 05,00 joule

Light Flux, Placement



Product Code Details

503004

Light Source



WARM WHITE 3000K LOW POWER LEDs 2x(5W)/220÷240V

Total power 11W

LED lm 2x360 ÷ OUTPUT lm 2x123

CRI >80

Integral electronic power supply



Accessories



Code: 139
Base plate and fixing bolts
160 x 100 x H 170 mm



Code: 237
SPD: (Surge Protection Device) 275Vac
Maximum discharge current 10KA (8/20 μ s)
Maximum operating current 5A
Suitable for series connection - IP66