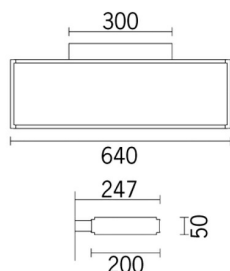


Last information update: June 2018

**indoor wall-mounted luminaire - 640x200 mm H 50 mm - neutral white LED - DALI****Product code**

5192

**Technical description**

Indoor wall-mounted luminaire with direct/indirect light emission designed to use a neutral white LED lamp (4000K). The light flow is split into 44% down light, 56% uplight. The product optical assembly is made with extruded aluminium lateral profiles, injection-moulded polycarbonate end caps and sheet steel inner covers. The product undergoes a liquid paint treatment. The optic system consists of an MPO methacrylate screen that allows the direction of the light emitted by the LED lamp to be controlled accurately. Luminance is maintained in compliance with EN12464-1 standards. UGR<19 levels are ideal for offices and work environments with videoscreens.

**Installation**

Wall-mounted. Wall-mounting is allowed by an aluminium base, with a galvanised sheet steel inner supporting plate.

**Dimension (mm)**

640x200x50

**Colour**

Grey (15)

**Weight (Kg)**

2.65

**Mounting**

wall surface

**Wiring**

Luminaire equipped with DALI digital dimmable electronic ballast, set up for switch-dim, with the possibility of also adjusting using a normal electric switch. The product is complete with quick-coupling terminal blocks for electrical connections. Occupies 1 DALI address.

Complies with EN60598-1 and pertinent regulations

**Product configuration: 5192****Product characteristics**

Total lighting output [Lm]: 3360  
 Total power [W]: 37.2  
 Luminous efficacy [Lm/W]: 90.3  
 Life Time: > 50,000h - L80 - B10 (Ta 25°C)


Total luminous flux at or above an angle of 90° [Lm]: 1872  
 Emergency luminous flux [Lm]: /  
 Voltage [V]: -  
 Number of optical assemblies: 1

**Optical assembly Characteristics Type 1**

Light Output Ratio (L.O.R.) [%]: 70  
 Lamp code: LED  
 ZVEI Code: LED  
 Nominal power [W]: 31  
 Nominal luminous [Lm]: 4800  
 Lamp maximum intensity [cd]: /  
 Beam angle [°]: /

Number of lamps for optical assembly: 1  
 Socket: /  
 Ballast losses [W]: 6.2  
 Colour temperature [K]: 4000  
 CRI: 80  
 Wavelength [Nm]: /  
 MacAdam Step: 3.5


**Polar**

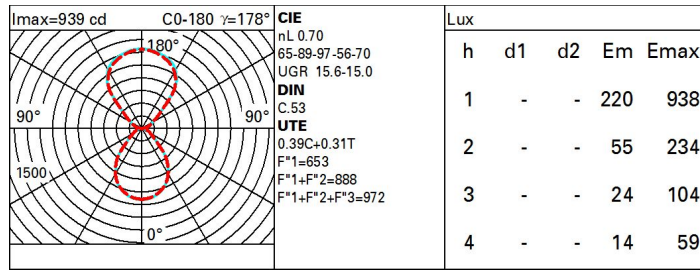

**Utilisation factors**

R	77	75	73	71	55	53	33	00	DRR
K0.8	42	37	32	29	33	29	26	20	53
1.0	46	41	37	34	36	33	30	23	59
1.5	52	48	44	41	42	40	35	27	70
2.0	55	52	49	46	46	43	38	30	77
2.5	57	54	52	50	48	46	41	32	82
3.0	59	56	54	52	50	48	42	33	85
4.0	60	58	56	55	51	50	44	35	89
5.0	61	60	58	57	53	51	45	35	91

**Luminance curve limit**

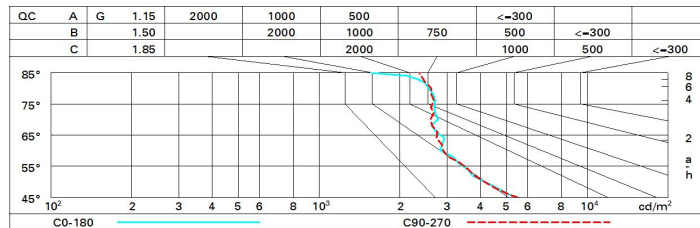

**UGR diagram**

Corrected UGR values (at 4800 lm bare lamp luminous flux)											
Reflect.:		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
ceiling/cav		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room dim		viewed crosswise					viewed endwise				
x	y										
2H	2H	13.1	13.7	14.0	14.6	15.6	13.1	13.7	14.0	14.6	15.6
	3H	13.9	14.4	14.8	15.3	16.4	13.3	13.8	14.1	14.7	15.7
	4H	14.3	14.8	15.2	15.7	16.8	13.3	13.8	14.2	14.6	15.8
	6H	14.7	15.2	15.6	16.1	17.2	13.3	13.7	14.2	14.6	15.7
	8H	14.9	15.3	15.8	16.2	17.3	13.2	13.7	14.1	14.6	15.7
	12H	14.9	15.3	15.8	16.2	17.4	13.2	13.6	14.1	14.5	15.6
4H	2H	13.3	13.8	14.2	14.6	15.7	14.3	14.8	15.2	15.7	16.8
	3H	14.3	14.7	15.2	15.6	16.7	14.7	15.1	15.6	16.0	17.1
	4H	14.8	15.2	15.8	16.1	17.3	14.8	15.2	15.7	16.1	17.3
	6H	15.4	15.7	16.3	16.6	17.8	15.0	15.3	15.9	16.2	17.4
	8H	15.6	15.9	16.6	16.8	18.0	15.0	15.3	16.0	16.2	17.5
	12H	15.7	15.9	16.7	16.9	18.1	15.0	15.3	16.0	16.2	17.5
8H	4H	15.0	15.3	16.0	16.3	17.5	15.6	15.9	16.5	16.8	18.0
	6H	15.7	16.0	16.7	17.0	18.2	15.9	16.1	16.9	17.1	18.3
	8H	16.1	16.3	17.1	17.3	18.5	16.1	16.3	17.0	17.2	18.5
	12H	16.3	16.4	17.3	17.4	18.7	16.2	16.4	17.2	17.4	18.6
12H	4H	15.0	15.3	16.0	16.2	17.5	15.7	16.0	16.7	16.9	18.2
	6H	15.8	16.0	16.8	17.0	18.3	16.1	16.3	17.1	17.3	18.6
	8H	16.2	16.4	17.2	17.4	18.6	16.3	16.5	17.3	17.5	18.8
Variations with the observer position at spacing:											
S =	1.0H	0.3 / -0.4					0.3 / -0.3				
	1.5H	0.9 / -0.7					0.9 / -0.7				
	2.0H	1.7 / -0.9					1.7 / -0.9				