


Last information update: May 2018

**Compact - Wall-/Ceiling-mounted - RGB LEDs - DALI control - L=506mm - Wall Washer Optic****Product code**

BI69

Technical description

Direct light luminaire, designed to use RGB LED lamps (Red, Green, Blue) and Dali control. Ceiling- and wall-mounted. Consists of a body and supports for installation, to be ordered separately. Extruded aluminium body, with die-cast aluminium end caps complete with silicone seals. Coated with liquid acrylic paint with a high level of weather and UV ray resistance. Lateral control gear box made of PPS (polyphenylene sulfide). The top of the optical assembly is closed by a 3 mm thick transparent glass screen, fixed with silicone. Complete with multi-LED plate with individual LEDs in Red, Green and Blue (RGB). Fitted with optics with plastic (methacrylate) lens for Wall Washer lighting. The lateral box is supplied with a double connector, male/female, with 5-pin quick coupling for pass-through wiring and a closing cap on one side. Set up for pass-through earth wiring. All external screws used are made of A2 stainless steel. The luminaire technical characteristics conform to EN 60598-1 standards and particular requirements.

Installation

Accessories available for installation: $\pm 90^\circ$ adjustable arms L=138mm (code 5576), arms extendable from 309 to 389mm and adjustable $\pm 90^\circ$ (code 5577), bracket for wall-mounting L=310mm (code BZ10), brackets for mounting on balustrades L297mm (code 5578), bracket for surface- or ceiling-mounting L=309mm (code 5570).

Dimension (mm)

506x75x66

Colour

Grey (15)

Weight (Kg)

1.45

Mounting

wall surface|ceiling surface

Wiring

The product is supplied with electronic control gear, Dali dimmable 220÷240Vac, 50/60Hz contained in the luminaire. Available for electrical connection and Dali control: IP66 5-pin female connector (BZ15), IP66 5-pin male connector + closing cap (BZ16), IP66 5-pin male connector + female connector (BZ17), multi-pole cable units with 5-pin male + female connectors (BZT4-BZT5-BZT6)

Notes

Product complete with LED lamp. The electronic board takes three Dali addresses, absorbs one Dali load.

Complies with EN60598-1 and pertinent regulations

**Product configuration: BI69****Product characteristics**

Total lighting output [Lm]: 494

Total power [W]: 18.6

Luminous efficacy [Lm/W]: 26.5

Life Time: 50,000h - L80 - B10 (Ta 25°C)

Ambient temperature range: from -20°C to +35°C.

Total luminous flux at or above an angle of 90° [Lm]: 0

Emergency luminous flux [Lm]: /

Voltage [V]: -

Life Time: 50,000h - L80 - B20 (Ta 40°C)

Number of optical assemblies: 1

Optical assembly Characteristics Type 1

Light Output Ratio (L.O.R.) [%]: 64

Lamp code: LED

ZVEI Code: LED

Nominal power [W]: 13

Nominal luminous [Lm]: 770

Lamp maximum intensity [cd]: /

Beam angle [°]: /

Number of lamps for optical assembly: 1

Socket: /

Ballast losses [W]: 5.6


Colour temperature [K]: /

CRI: /

Wavelength [Nm]: /

MacAdam Step: /

Polar

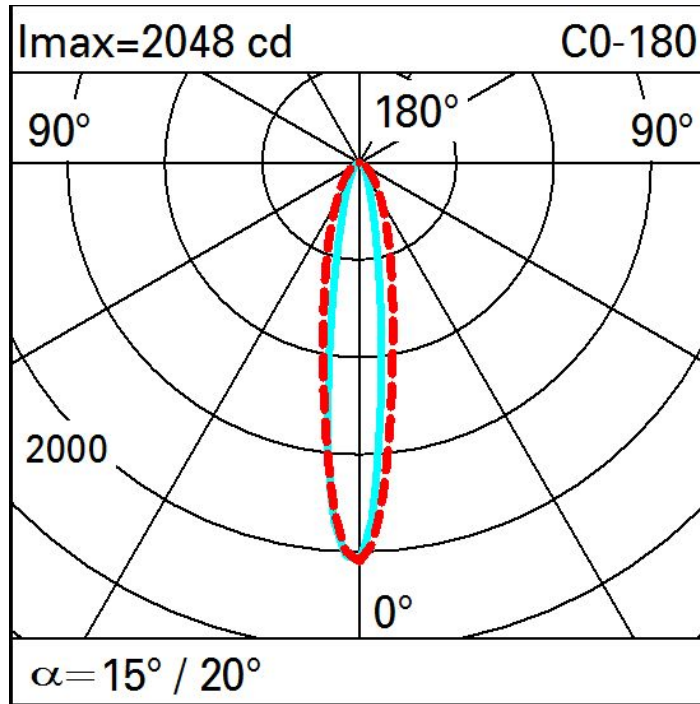

Illuminances

Lux		Wall distance = 1m											
3													
		0.1	0.3	0.9	3	9	21	7	2	0.6	0.2		
2		0.4	0.9	2	6	14	33	11	4	2	0.7	0.3	
		0.6	1	3	6	14	30	12	5	2	0.9	0.5	
1		0.7	1	3	6	13	26	11	5	2	0.9	0.5	
		0.7	1	3	6	12	21	9	4	2	1	0.5	
0	m	-2	-1	0	1	2	3						