


Last information update: May 2018

**Ceiling-mounted recessed luminaire with IP66 protection rating, large body, Neutral White COB Leds, Wall Washer optic****Product code**

BV40

**Technical description**

Downlighter designed to use Neutral White COB Led lamps with a Wall Washer optic. Consists of a round optical assembly, frame, output cable, and outer casing, to be ordered separately where necessary. The optical assembly and frame are made of EN1706AC 46100LF aluminium alloy and subjected to a multi-step, pre-treatment process, in which the main phases are degreasing, fluorozirconation (a protective surface film) and sealing (with a nano-structured silane layer). The next painting stage consists of a primer and a liquid acrylic paint, cured at 150°C, with a high level of weather and UV ray resistance. The tempered sodium-calcium sealing glass is transparent, with customised serigraphy on the edge, 4mm thick, joined to the frame with silicone. Complete with monochrome Neutral White COB LED circuit and built-in electronic ballast. The wall washer optic consists of a 99.93% super-pure polished, anodised aluminium reflector and sand-blasted, sodium-calcium tempered, ribbed glass. Supplied with an output cable L=1m long. Ceiling-mounting system consists of special A2 stainless steel screws complete with black aluminium alloy and plastic coupling supports. The frame comes complete with A2 stainless steel captive screws. There is a single tool (No. 3 Allen key) for opening the frame and for the fixing system. The outer casing for concrete ceilings is made of black-painted ready-galvanised sheet aluminium complete with an end cap and threaded bar, to be ordered separately. All external screws used are made of A2 stainless steel.

**Installation**

Recessed in false ceilings 5 - 60mm thick. Hole for preparation of false ceiling  $\varnothing=212$ mm. Installed on concrete ceilings using an outer casing, to be ordered separately.

**Dimension (mm)**

Ø228x240

**Colour**

Grey (15)

**Weight (Kg)**

3.1

**Mounting**

ceiling recessed

**Wiring**

Control gear complete with electronic ballast (220÷240Vac 50/60Hz)

**Notes**

Plastic adapter disk available for flush-mounting the frame on ceilings made of concrete exposed to view (can only be used with the product with aluminium frame, without the stainless cover). Products set up for installation of a stainless steel safety kit L=2000mm.

Complies with EN60598-1 and pertinent regulations

**Product configuration: BV40****Product characteristics**

Total lighting output [Lm]: 2183  
 Total power [W]: 26.8  
 Luminous efficacy [Lm/W]: 81.4  
 Life Time: 100,000h - L80 - B10 (Ta 25°C)  
 Ambient temperature range: from -20°C to +35°C.


Total luminous flux at or above an angle of 90° [Lm]: 0  
 Emergency luminous flux [Lm]: /  
 Voltage [V]: -  
 Life Time: 97,000h - L80 - B10 (Ta 40°C)  
 Number of optical assemblies: 1

**Optical assembly Characteristics Type 1**

Light Output Ratio (L.O.R.) [%]: 59  
 Lamp code: LED  
 ZVEI Code: LED  
 Nominal power [W]: 23  
 Nominal luminous [Lm]: 3700  
 Lamp maximum intensity [cd]: /  
 Beam angle [°]: /

Number of lamps for optical assembly: 1  
 Socket: /  
 Ballast losses [W]: 3.8  
 Colour temperature [K]: 4000  
 CRI: 80  
 Wavelength [Nm]: /  
 MacAdam Step: 2

Polar

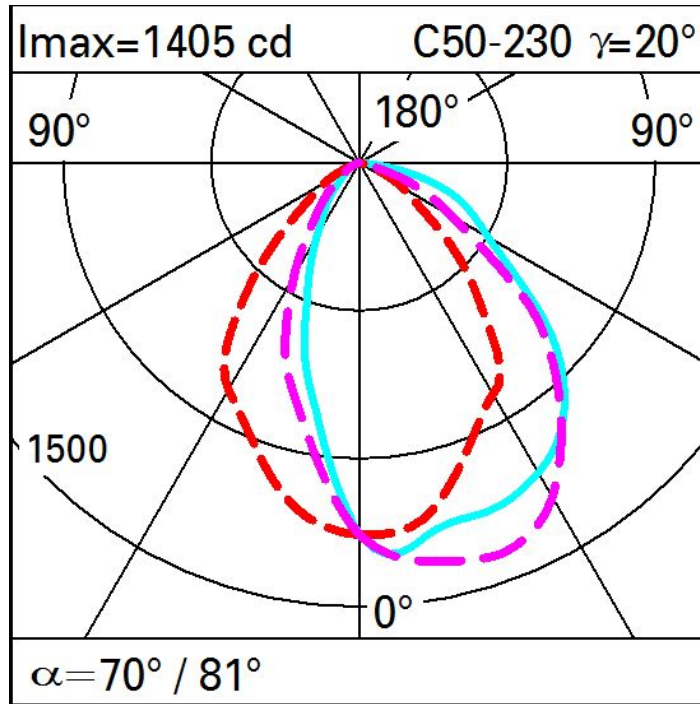

Illuminances

Lux		Wall distance = 1m										
3												
		0.2	0.5	2	5	18	68	88	37	12	5	3
2		0.8	2	4	15	55	171	199	102	44	21	11
		1	3	7	21	64	151	166	115	60	28	15
1		2	4	9	21	53	89	104	84	54	32	18
		2	4	9	19	38	55	65	58	42	28	18
0												
	m	-2	-1	0	1	2	3					