


Last information update: May 2018

**Floor recessed Orbit D=28mm - Spot optic****Product code**
E068**Technical description**

Recessed luminaire that can be installed in walls, ceilings and floors. It is designed to use white monochrome LED lamps, powered with a continuous current of Max 350mA per luminaire. The D = 28 mm round frame has hidden screws, and is made of AISI 304 stainless steel body and frame with an extra-clear, sodium - calcium tempered glass cover. The luminaire is fixed to the outer casing using special locking seals that hold it in place. The unit comes complete with LED circuit and a metallized plastic reflector. The product's wiring system features an A2 stainless steel cable gland with a 1800 mm long H05RNF type 2x1 mm² output power cable. The cable is equipped with an anti-transpiration device (IP68) that consists of a silicone-coated joint located on the power cable. Two types of outer casing are available for installation and both can be ordered separately from the plastic optic assembly. The glass unit, optical assembly and outer casing together guarantee a maximum static load resistance of 2000 kg. The maximum surface temperature of the glass is less than 40°. Luminaire protected against polarity inversion. Inclusive of BY-PASS device that allows the series-connected system to work in case of faults.C.

Installation

The product is fixed to the outer casing using special locking seals with toolfree installation. The unit can be recessed in floors, ceilings or walls using the outer casing for installation. It can also be installed in counter walls and false ceilings using special spring accessories to be ordered separately.

Dimension (mm)

Ø28x68

Colour

Steel (13)

Weight (Kg)

0.18

Mounting

wall recessed|Floor recessed|ceiling recessed|ground recessed

Wiring

Ballasts available: 350mA traditional and watertight IP67 versions. The product comes complete with a 1800 mm long H05RNF type 2x1 mm² output power cable and an electronic plate with a 350mA Max LED. Ballast to be ordered separately.

Notes

IP68 rating on both the product and the cable using IP68 connectors * The product is not suitable for installation in swimming pools and fountains.

Complies with EN60598-1 and pertinent regulations



IK09



IP68

Immersione completa per periodi limitati,
non idoneo in piscine e fontane.



The lighting fixtures were designed and tested to withstand a static load of up to 20000 N and to resist drive-over stress. The fixtures may not be installed in areas where snowplows are used, or where the drive-over speed exceeds 50 km/h.

Product configuration: E068**Product characteristics**

Total lighting output [Lm]: 32
Total power [W]: 1
Luminous efficacy [Lm/W]: 32
Life Time: 100,000h - L80 - B10 (Ta 25°C)
Ambient temperature range: from -20°C to +35°C. (*)

Total luminous flux at or above an angle of 90° [Lm]: 32
Emergency luminous flux [Lm]: /
Voltage [V]: -
Life Time: 90,000h - L80 - B10 (Ta 40°C)
Number of optical assemblies: 1


* Preliminary data

Optical assembly Characteristics Type 1

Light Output Ratio (L.O.R.) [%]: 32
Lamp code: LED
ZVEI Code: LED
Nominal power [W]: 1
Nominal luminous [Lm]: 100
Lamp maximum intensity [cd]: /
Beam angle [°]: 10°

Number of lamps for optical assembly: 1
Socket: /
Ballast losses [W]: 0
Colour temperature [K]: 3000
CRI: 80
Wavelength [Nm]: /
MacAdam Step: 3

Polar

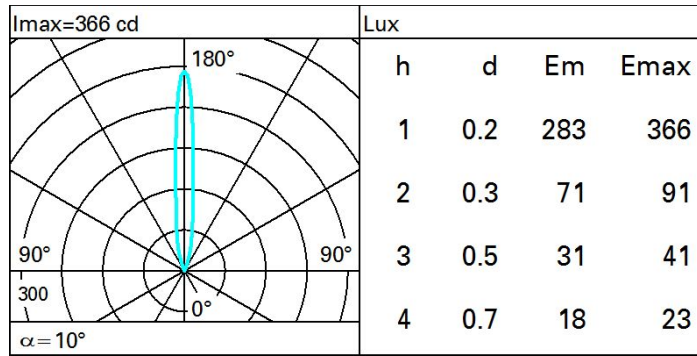

UGR diagram

| Corrected UGR values (at 100 lm bare lamp luminous flux) | | | | | | | | | | | | |
|--|------|------------------|------|------|------|------|----------------|------|------|------|------|--|
| Reflect.: | | viewed crosswise | | | | | viewed endwise | | | | | |
| ceiling/cav | | 0.70 | 0.70 | 0.50 | 0.50 | 0.30 | 0.70 | 0.70 | 0.50 | 0.50 | 0.30 | |
| walls | | 0.50 | 0.30 | 0.50 | 0.30 | 0.30 | 0.50 | 0.30 | 0.50 | 0.30 | 0.30 | |
| work pl. | | 0.20 | 0.20 | 0.20 | 0.20 | 0.20 | 0.20 | 0.20 | 0.20 | 0.20 | 0.20 | |
| Room dim | | | | | | | | | | | | |
| x | y | | | | | | | | | | | |
| 2H | 2H | 12.0 | 14.0 | 12.3 | 14.3 | 14.6 | 12.0 | 14.0 | 12.3 | 14.3 | 14.6 | |
| | 3H | 13.4 | 14.9 | 13.8 | 15.2 | 15.5 | 12.4 | 13.9 | 12.8 | 14.2 | 14.5 | |
| | 4H | 14.0 | 15.2 | 14.4 | 15.5 | 15.8 | 12.6 | 13.8 | 13.0 | 14.1 | 14.4 | |
| | 6H | 14.6 | 15.4 | 14.9 | 15.7 | 16.1 | 12.7 | 13.6 | 13.1 | 13.9 | 14.2 | |
| | 8H | 14.7 | 15.6 | 15.1 | 15.9 | 16.2 | 12.7 | 13.6 | 13.1 | 13.9 | 14.3 | |
| | 12H | 14.8 | 15.7 | 15.2 | 16.0 | 16.4 | 12.7 | 13.6 | 13.1 | 13.9 | 14.3 | |
| 4H | 2H | 12.6 | 13.8 | 13.0 | 14.1 | 14.4 | 14.0 | 15.2 | 14.4 | 15.5 | 15.8 | |
| | 3H | 14.3 | 15.2 | 14.7 | 15.5 | 15.9 | 14.7 | 15.6 | 15.1 | 16.0 | 16.3 | |
| | 4H | 14.9 | 15.9 | 15.3 | 16.3 | 16.7 | 14.9 | 15.9 | 15.3 | 16.3 | 16.7 | |
| | 6H | 15.2 | 16.9 | 15.7 | 17.3 | 17.8 | 14.9 | 16.5 | 15.3 | 17.0 | 17.5 | |
| | 8H | 15.3 | 17.2 | 15.8 | 17.7 | 18.2 | 14.8 | 16.7 | 15.3 | 17.2 | 17.7 | |
| | 12H | 15.4 | 17.3 | 15.9 | 17.8 | 18.3 | 14.8 | 16.7 | 15.3 | 17.2 | 17.7 | |
| 8H | 4H | 14.8 | 16.7 | 15.3 | 17.2 | 17.7 | 15.3 | 17.2 | 15.8 | 17.7 | 18.2 | |
| | 6H | 15.5 | 17.2 | 16.1 | 17.7 | 18.2 | 15.7 | 17.4 | 16.2 | 17.8 | 18.4 | |
| | 8H | 15.9 | 17.3 | 16.4 | 17.8 | 18.3 | 15.9 | 17.3 | 16.4 | 17.8 | 18.3 | |
| | 12H | 16.3 | 17.2 | 16.8 | 17.7 | 18.2 | 16.1 | 17.1 | 16.6 | 17.6 | 18.1 | |
| 12H | 4H | 14.8 | 16.7 | 15.3 | 17.2 | 17.7 | 15.4 | 17.3 | 15.9 | 17.8 | 18.3 | |
| | 6H | 15.7 | 17.1 | 16.2 | 17.6 | 18.1 | 15.9 | 17.3 | 16.4 | 17.8 | 18.4 | |
| | 8H | 16.1 | 17.1 | 16.6 | 17.6 | 18.1 | 16.3 | 17.2 | 16.8 | 17.7 | 18.2 | |
| Variations with the observer position at spacing: | | | | | | | | | | | | |
| S = | 1.0H | 0.2 / -0.2 | | | | | 0.2 / -0.2 | | | | | |
| | 1.5H | 0.4 / -0.4 | | | | | 0.4 / -0.4 | | | | | |
| | 2.0H | 0.8 / -0.6 | | | | | 0.8 / -0.6 | | | | | |