

Last information update: May 2018



Platea Pro class I

Product code
E914

Technical description


Outdoor luminaire with a Spot optic, designed to use LED lamps. Consists of an optical assembly with a base and an aluminium alloy frame. The painting stage consists of a primer and a liquid acrylic paint, cured at 150 °C, with a high level of weather and UV ray resistance. 5 mm thick colourless transparent tempered sodium-calcium closing glass. Product can be tilted on the vertical plane by +5°/-90° and is fitted with mechanical blocks that guarantee stable light beam aiming. Horizontal aiming can be adjusted using the slots on which the base is provided with a ±30° adjustment option. High visual comfort. High yield, homogeneous light distribution polymer optic lenses. Complete with circuit fitted with Warm White monochrome LEDs. Removable control gear connected with quick-coupling connectors. 220-240V ac 50/60Hz electronic ballast. Insulation class I. Replaceable control gear. All the screws used are made of A2 stainless steel.

Installation

The luminaire can be installed on the wall or floor using a standard base. Ground-installed using an accessory stake.

Dimension (mm)

406x276



Colour

Grey (15)

Weight (Kg)

8.55

Mounting

wall arm|ground surface|wall surface


Wiring

Product perfect watertightness at the power cable entry point is guaranteed by a M24x1,5 nickel-plated brass cable gland suitable for cables with a max external ø14mm (cross-section from 1.5mm²). Screw terminal board.

Notes

The following are available as accessories: refractor for elliptical light flow distribution, diffusing glass, visor, directional flaps, protective grille and spike for ground installation.

Complies with EN60598-1 and pertinent regulations



Product configuration: E914

Product characteristics


Total lighting output [Lm]: 4332	Total luminous flux at or above an angle of 90° [Lm]: 0
Total power [W]: 51	Emergency luminous flux [Lm]: /
Luminous efficacy [Lm/W]: 84.9	Voltage [V]: -
Ambient temperature range: from -20°C to +35°C. (*)	Number of optical assemblies: 1

* Preliminary data


Optical assembly Characteristics Type 1

Light Output Ratio (L.O.R.) [%]: 76	Number of lamps for optical assembly: 1
Lamp code: LED	Socket: /
ZVEI Code: LED	Ballast losses [W]: 0
Nominal power [W]: 51	Colour temperature [K]: 3000
Nominal luminous [Lm]: 5700	CRI: 80
Lamp maximum intensity [cd]: /	Wavelength [Nm]: /
Beam angle [°]: 12°	MacAdam Step: 3

Polar

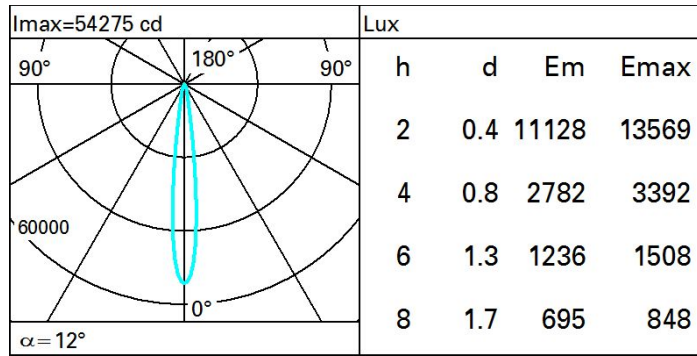

Isolux

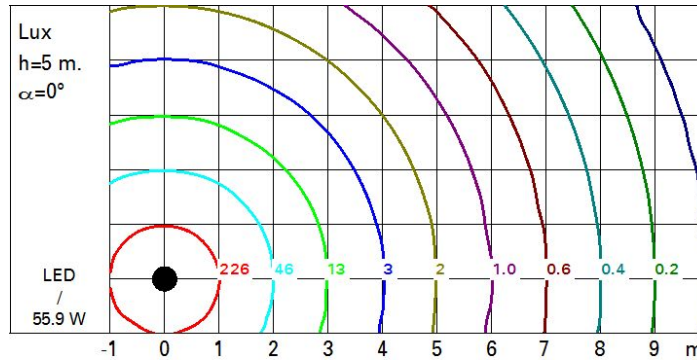

UGR diagram

Corrected UGR values (at 5700 lm bare lamp luminous flux)											
Reflect.:		viewed crosswise					viewed endwise				
ceiling	cav	0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room dim											
x	y										
2H	2H	9.8	11.7	10.1	12.0	12.4	9.8	11.7	10.1	12.0	12.4
	3H	10.3	11.5	10.7	11.8	12.2	10.1	11.3	10.4	11.6	11.9
	4H	10.4	11.3	10.7	11.6	12.0	10.1	11.1	10.5	11.4	11.7
	6H	10.3	11.1	10.7	11.4	11.7	10.1	10.9	10.5	11.2	11.5
	8H	10.3	11.1	10.6	11.4	11.8	10.1	10.9	10.5	11.2	11.6
	12H	10.2	11.1	10.6	11.5	11.8	10.0	10.9	10.4	11.3	11.6
4H	2H	10.1	11.1	10.5	11.4	11.7	10.4	11.3	10.7	11.6	12.0
	3H	10.6	11.6	11.0	11.9	12.3	10.6	11.5	11.0	11.9	12.3
	4H	10.5	11.7	11.0	12.1	12.6	10.5	11.7	11.0	12.1	12.6
	6H	10.3	12.0	10.8	12.4	12.9	10.3	12.0	10.8	12.5	12.9
	8H	10.2	12.0	10.7	12.5	13.0	10.2	12.0	10.7	12.5	13.0
	12H	10.1	11.9	10.6	12.4	12.9	10.1	12.0	10.6	12.4	13.0
8H	4H	10.2	12.0	10.7	12.5	13.0	10.2	12.0	10.7	12.5	13.0
	6H	10.2	11.8	10.7	12.2	12.8	10.2	11.8	10.7	12.2	12.8
	8H	10.2	11.5	10.8	12.0	12.5	10.2	11.5	10.8	12.0	12.5
	12H	10.4	11.1	10.9	11.6	12.1	10.4	11.1	10.9	11.6	12.1
12H	4H	10.1	12.0	10.6	12.4	13.0	10.1	11.9	10.6	12.4	12.9
	6H	10.2	11.5	10.8	12.0	12.5	10.2	11.5	10.7	12.0	12.5
	8H	10.4	11.1	10.9	11.6	12.1	10.4	11.1	10.9	11.6	12.1
Variations with the observer position at spacing:											
S =	1.0H	1.6 / -0.9					1.6 / -0.9				
	1.5H	3.1 / -1.8					3.1 / -1.8				
	2.0H	4.6 / -3.2					4.6 / -3.2				