


Last information update: May 2018

**Ceiling-mounted luminaire - neutral LED - Controlled luminance UGR < 19 - Electronic control gear with inverter****Product code**  
MR79**Technical description**

LED lamp, ceiling-mounted luminaire; integrated electronic control gear, including an inverter and battery unit for permanent emergency light with 1.5 hours autonomy. Die-cast aluminium plate for surface mounting with diffuser element; technical, shaped aluminium sheet brackets for components and optics; comfort reflector vacuum-metallised with aluminium vapours and finished with a protective, anti-scratch layer - controlled luminance optic; safety glass cover over LED lamp; lathe-shaped aluminium cylindrical body; lower ring in high resistance polycarbonate.

**Installation**

Plate fixed to ceiling using screws and screw anchors (not included); bayonet assembly systems ensuring simple installation and maintenance; snap-on spring fastening for reflector. Wall or pendant application option available thanks to special accessory kits with a separate code.

**Dimension (mm)**  
Ø240x273**Colour**  
White (01) | Grey (15)**Weight (Kg)**  
3.9**Mounting**

wall surface|ceiling surface|ceiling pendant

**Wiring**

Control gear integrated in luminaire; mains and optic unit connections made with quick coupling terminal blocks.

**Notes**

Kit for wall-mounting: code no. 9443 - kit for steel cable pendant system L 1500: code no. 9442

Complies with EN60598-1 and pertinent regulations



IP23

**Product configuration: MR79****Product characteristics**

Total lighting output [Lm]: 1679.2  
Total power [W]: 15  
Luminous efficacy [Lm/W]: 111.9  
Life Time: 50,000h - L80 - B10 (Ta 25°C)


Total luminous flux at or above an angle of 90° [Lm]: 0  
Emergency luminous flux [Lm]: /  
Voltage [V]: -  
Number of optical assemblies: 1

**Optical assembly Characteristics Type 1**

Light Output Ratio (L.O.R.) [%]: 84  
Lamp code: LED  
ZVEI Code: LED  
Nominal power [W]: 13  
Nominal luminous [Lm]: 2000  
Lamp maximum intensity [cd]: /  
Beam angle [°]: /

Number of lamps for optical assembly: 1  
Socket: /  
Ballast losses [W]: 2  
Colour temperature [K]: 4000  
CRI: 80  
Wavelength [Nm]: /  
MacAdam Step: 3


# Polar

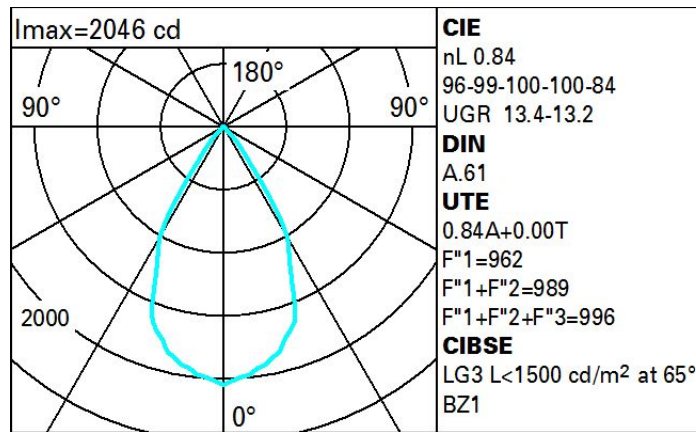

## Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	74	70	67	65	69	67	66	63	76
1.0	78	74	71	69	73	71	70	67	80
1.5	82	79	77	75	78	76	75	73	87
2.0	85	83	81	80	82	80	79	77	91
2.5	87	85	84	82	84	82	82	79	94
3.0	88	86	85	85	85	84	83	81	96
4.0	89	88	87	86	86	86	85	82	98
5.0	89	89	88	88	87	87	85	83	99

## Luminance curve limit

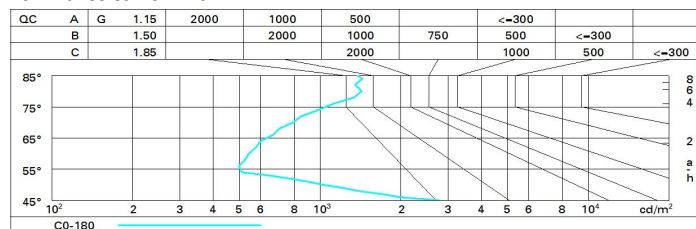

# UGR diagram

Photometric curve code: MQ210000.NEW Corrected UGR values (at 2000 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x      y		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
		viewed crosswise					viewed endwise				
2H	2H	13.4	14.1	13.7	14.3	14.6	13.4	14.1	13.7	14.3	14.6
	3H	13.4	14.0	13.7	14.2	14.5	13.3	13.9	13.6	14.2	14.5
	4H	13.4	13.9	13.7	14.2	14.5	13.3	13.8	13.6	14.1	14.4
	6H	13.4	13.9	13.8	14.2	14.6	13.2	13.7	13.5	14.0	14.3
	8H	13.5	13.9	13.8	14.3	14.6	13.1	13.6	13.5	14.0	14.3
	12H	13.5	13.9	13.8	14.3	14.6	13.1	13.6	13.5	13.9	14.3
4H	2H	13.3	13.8	13.6	14.1	14.4	13.4	13.9	13.7	14.2	14.5
	3H	13.2	13.7	13.6	14.0	14.4	13.3	13.7	13.6	14.1	14.4
	4H	13.2	13.6	13.6	14.0	14.4	13.2	13.6	13.6	14.0	14.4
	6H	13.4	13.7	13.8	14.1	14.6	13.2	13.6	13.6	14.0	14.4
	8H	13.4	13.8	13.9	14.2	14.6	13.2	13.5	13.6	13.9	14.4
	12H	13.5	13.8	14.0	14.2	14.7	13.2	13.5	13.6	13.9	14.3
8H	4H	13.2	13.5	13.6	13.9	14.4	13.4	13.8	13.9	14.2	14.6
	6H	13.4	13.7	13.9	14.1	14.6	13.5	13.8	14.0	14.2	14.7
	8H	13.5	13.8	14.0	14.2	14.7	13.5	13.8	14.0	14.2	14.7
	12H	13.7	13.9	14.2	14.3	14.9	13.6	13.8	14.1	14.3	14.8
12H	4H	13.2	13.5	13.6	13.9	14.3	13.5	13.8	14.0	14.2	14.7
	6H	13.4	13.7	13.9	14.1	14.6	13.6	13.8	14.1	14.3	14.8
	8H	13.6	13.8	14.1	14.3	14.8	13.7	13.9	14.2	14.3	14.9
Variations with the observer position at spacing:											
S =	1.0H		4.8	/	-4.4			4.8	/	-4.4	
	1.5H		7.5	/	-4.6			7.5	/	-4.6	
	2.0H		9.4	/	-4.5			9.4	/	-4.5	