


Last information update: June 2018



Fixed circular recessed luminaire - Ø242 mm - neutral white - flood optic - UGR<19

Product code
N021

Technical description

Fixed round luminaire designed to use a LED lamp with C.O.B. technology. Version with rim for surface-mounting. Reflector vacuum-metallised with aluminium vapours with an anti-scratch protective layer. Structure with die-cast aluminium perimeter frame, black, zinc-plated sheet steel brackets and extruded aluminium dissipater painted black. Passive dissipation system. Product complete with LED lamp in neutral white colour tone (4,000K). General light emission, with controlled luminance UGR<19 1500 cd/m² α>65° flood optic.

Installation

Recessed using torsion springs which allow easy installation in false ceilings with thickness ranging from 1 mm to 25 mm.

Dimension (mm)
Ø263x219

Colour
White/Aluminium (39)

Weight (Kg)
2.46

Mounting
ceiling recessed

Wiring
product complete with DALI components

Complies with EN60598-1 and pertinent regulations



Product configuration: N021

Product characteristics

Total lighting output [Lm]: 6062.4
Total power [W]: 54.8
Luminous efficacy [Lm/W]: 110.6
Life Time: 50,000h - L80 - B10 (Ta 25°C)


Total luminous flux at or above an angle of 90° [Lm]: 0
Emergency luminous flux [Lm]: /
Voltage [V]: -
Number of optical assemblies: 1

Optical assembly Characteristics Type 1

Light Output Ratio (L.O.R.) [%]: 76
Lamp code: LED
ZVEI Code: LED
Nominal power [W]: 49
Nominal luminous [Lm]: 8000
Lamp maximum intensity [cd]: /
Beam angle [°]: 24°

Number of lamps for optical assembly: 1
Socket: /
Ballast losses [W]: 5.8
Colour temperature [K]: 4000
CRI: 80
Wavelength [Nm]: /
MacAdam Step: 2

Polar

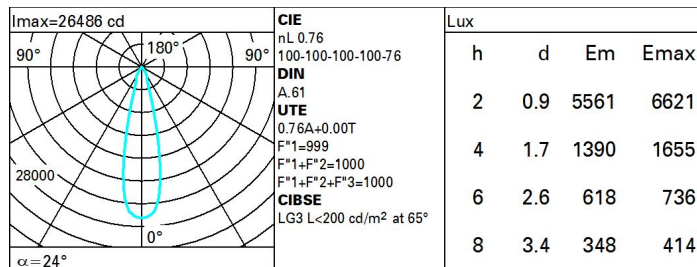

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	69	65	63	61	64	62	62	59	78
1.0	71	68	66	64	68	66	65	63	83
1.5	75	73	71	69	72	70	69	67	89
2.0	77	76	74	73	75	73	73	70	93
2.5	79	77	76	76	76	75	75	73	96
3.0	80	79	78	77	78	77	76	74	98
4.0	81	80	79	79	79	78	77	75	99
5.0	81	81	80	80	79	79	78	76	100
