

Last information update: May 2018



adjustable luminaire - Ø 153 mm - neutral white - flood optic - frame

**Product code**  
 N096
**Technical description**

Round adjustable luminaire designed to use an LED lamp with C.O.B. technology in a neutral white colour tone 4000K. Version with rim for surface-mounting. Painted, die-cast aluminium body. Lower reflector vacuum-metallised with aluminium vapours with an anti-scratch protective layer. Anodised aluminium upper reflector. Black, zinc-plated sheet steel bracket. The luminaire can be rotated 30° relative to the horizontal plane and 358° about the vertical axis. The luminaire is fitted with mechanical locks for light beam aiming. Painted extruded aluminium dissipater.

**Installation**

Recessed using torsion springs which allow easy installation in false ceilings with thickness ranging from 1 mm to 25 mm.

**Dimension (mm)**  
 Ø162x210

**Colour**  
 White/Aluminium (39)

**Weight (Kg)**  
 1.95

**Mounting**  
 ceiling recessed

**Wiring**  
 Product complete with DALI components

Complies with EN60598-1 and pertinent regulations



IP20

IP23

**Product configuration: N096****Product characteristics**

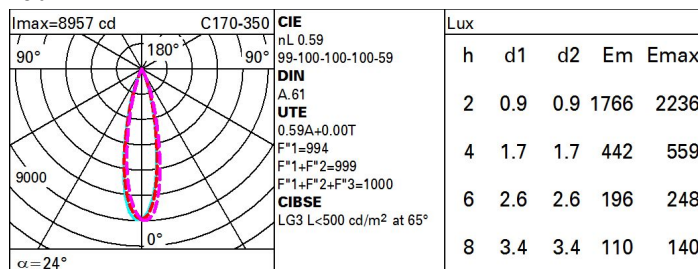
Total lighting output [Lm]: 1763.7  
 Total power [W]: 23.5  
 Luminous efficacy [Lm/W]: 75.1  
 Life Time: 50,000h - L80 - B10 (Ta 25°C)

Total luminous flux at or above an angle of 90° [Lm]: 0  
 Emergency luminous flux [Lm]: /  
 Voltage [V]: -  
 Number of optical assemblies: 1

**Optical assembly Characteristics Type 1**

Light Output Ratio (L.O.R.) [%]: 59  
 Lamp code: LED  
 ZVEI Code: LED  
 Nominal power [W]: 21  
 Nominal luminous [Lm]: 3000  
 Lamp maximum intensity [cd]: /  
 Beam angle [°]: 24°

Number of lamps for optical assembly: 1  
 Socket: /  
 Ballast losses [W]: 2.5  
 Colour temperature [K]: 4000  
 CRI: 80  
 Wavelength [Nm]: /  
 MacAdam Step: 2

**Polar**

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	53	50	48	47	50	48	48	46	78
1.0	55	53	51	50	52	51	50	49	83
1.5	58	56	55	54	56	54	54	52	88
2.0	60	59	57	57	58	57	56	55	93
2.5	61	60	59	59	59	58	58	56	96
3.0	62	61	60	60	60	60	59	57	98
4.0	62	62	62	61	61	61	60	58	99
5.0	63	62	62	62	62	61	60	59	100

Luminance curve limit

