

Last information update: June 2018

**iPlan - neutral white - UGR<19 L<3,000 cd/m2 for $\alpha \geq 65^\circ$ - DALI****Product code**

N263

Technical description

Direct and indirect emission pendant luminaire designed to use neutral white 4000K high colour rendering LEDs. Extruded anodised aluminium perimeter profile. The down light LEDs are arranged inside the perimeter, while the up light LEDs are positioned in the upper section. The micro-prismatic diffuser screen, combined with an inner screen and diffusing film, allows optimum diffusion of the direct light and controlled luminance UGR<19 L<3,000 cd/m2 for $\alpha \geq 65^\circ$. Luminaire set up for simultaneous switch on of both up/down light emission. Product complete with DALI driver, L=1500 mm supporting cables and special power supply base.

Installation

Pendant. System complete with power supply base and L= 1500 mm cables

Dimension (mm)

1200x300x26

Colour

Aluminium (12)

Weight (Kg)

10.2

Mounting

ceiling pendant

Wiring

Product complete with DALI electronic components

Complies with EN60598-1 and pertinent regulations



IP20



pending

Product configuration: N263**Product characteristics**


Total lighting output [Lm]: 4828
Total power [W]: 47
Luminous efficacy [Lm/W]: 102.7
Life Time: > 50,000h - L80 - B10 (Ta 25°C)

Total luminous flux at or above an angle of 90° [Lm]: 814
Emergency luminous flux [Lm]: /
Voltage [V]: -
Number of optical assemblies: 1


Optical assembly Characteristics Type 1

Light Output Ratio (L.O.R.) [%]: 68
Lamp code: LED
ZVEI Code: LED
Nominal power [W]: 42
Nominal luminous [Lm]: 7100
Lamp maximum intensity [cd]: /
Beam angle [°]: /

Number of lamps for optical assembly: 1
Socket: /
Ballast losses [W]: 5
Colour temperature [K]: 4000
CRI: 80
Wavelength [Nm]: /
MacAdam Step: 3




Polar

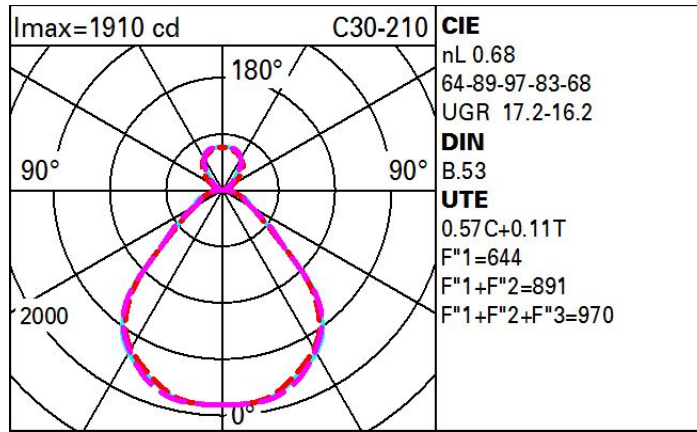

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	47	41	37	34	39	35	34	29	52
1.0	51	45	41	38	43	40	38	33	59
1.5	56	52	49	46	49	47	45	39	70
2.0	60	56	53	51	53	51	49	44	77
2.5	62	59	57	54	56	54	51	46	82
3.0	63	61	59	57	57	56	53	48	85
4.0	65	63	61	60	59	58	55	50	88
5.0	66	64	63	61	61	59	56	51	90

Luminance curve limit

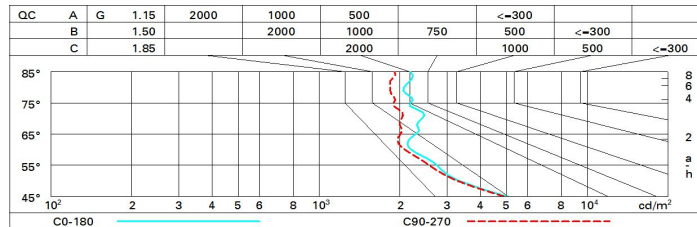

UGR diagram

Corrected UGR values (at 7100 lm bare lamp luminous flux)											
Reflect.:		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
ceiling/cav		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room dim		viewed crosswise					viewed endwise				
x	y										
2H	2H	14.6	15.3	15.1	15.8	16.4	14.3	15.1	14.9	15.6	16.2
	3H	15.3	16.0	15.9	16.5	17.2	14.5	15.2	15.1	15.7	16.4
	4H	15.8	16.4	16.4	17.0	17.6	14.6	15.2	15.1	15.8	16.4
	6H	16.2	16.8	16.8	17.4	18.1	14.5	15.1	15.2	15.7	16.4
	8H	16.4	17.0	17.0	17.6	18.2	14.5	15.1	15.1	15.7	16.4
	12H	16.5	17.1	17.2	17.7	18.4	14.5	15.0	15.1	15.6	16.3
4H	2H	14.7	15.4	15.3	15.9	16.6	15.4	16.0	15.9	16.5	17.2
	3H	15.7	16.2	16.3	16.9	17.5	15.7	16.3	16.4	16.9	17.6
	4H	16.3	16.8	17.0	17.4	18.1	15.9	16.4	16.6	17.0	17.7
	6H	17.0	17.4	17.6	18.0	18.8	16.1	16.5	16.8	17.2	17.9
	8H	17.2	17.6	17.9	18.3	19.1	16.2	16.5	16.8	17.2	18.0
	12H	17.4	17.8	18.1	18.5	19.3	16.2	16.5	16.9	17.2	18.0
8H	4H	16.5	16.9	17.2	17.6	18.4	16.7	17.0	17.3	17.7	18.5
	6H	17.4	17.7	18.1	18.4	19.2	17.0	17.4	17.8	18.1	18.9
	8H	17.8	18.1	18.5	18.8	19.6	17.3	17.5	18.0	18.2	19.1
	12H	18.2	18.4	18.9	19.1	20.0	17.4	17.7	18.2	18.4	19.2
12H	4H	16.5	16.9	17.2	17.6	18.4	16.8	17.2	17.5	17.9	18.7
	6H	17.4	17.7	18.2	18.4	19.3	17.3	17.6	18.0	18.3	19.1
	8H	17.9	18.2	18.7	18.9	19.7	17.6	17.8	18.3	18.5	19.4
Variations with the observer position at spacing:											
S =	1.0H	0.3 / -0.4					0.4 / -0.5				
	1.5H	1.0 / -0.8					1.0 / -0.8				
	2.0H	1.8 / -0.9					1.9 / -1.1				