


## Front Light

Design iGuzzini

iGuzzini

Last information update: May 2018



### pendant - Warm White - Wide Flood Optic

#### Product code

N281

#### Technical description

Pendant luminaire equipped with a three-phase adapter for electrified tracks or a base, made of die-cast aluminium and thermoplastic material. The pendant system consists of steel cables L=2000 that provide a simple mechanical anchoring system. Having been rotated and tilted, the luminaire can be locked mechanically in position to ensure efficient light aiming (during maintenance operations too). Luminaire for high output C.O.B. technology LED lamp with monochrome emission in a warm white colour tone (3000K) CRI 90. Wide flood optic. Equipped with electronic ballast. Equipped with an accessory holding ring designed to contain a flat accessory. An external component may also be applied, such as directional flaps with 360° rotation.

#### Installation

On an electrified track or base

#### Dimension (mm)

Ø116x250

#### Colour

White (01) | Black (04)

#### Weight (Kg)

1.7

#### Mounting

three circuit track pendant|ceiling surface

#### Wiring

product complete with electronic components

Complies with EN60598-1 and pertinent regulations

IP20 IP40 for optical assembly



#### Product configuration: N281

#### Product characteristics

Total lighting output [Lm]: 2397  
Total power [W]: 30.2  
Luminous efficacy [Lm/W]: 79.4  
Life Time: > 50,000h - L80 - B10 (Ta 25°C)

Total luminous flux at or above an angle of 90° [Lm]: 0  
Emergency luminous flux [Lm]: /  
Voltage [V]: -  
Number of optical assemblies: 1

#### Optical assembly Characteristics Type 1

Light Output Ratio (L.O.R.) [%]: 80  
Lamp code: LED  
ZVEI Code: LED  
Nominal power [W]: 28  
Nominal luminous [Lm]: 3000  
Lamp maximum intensity [cd]: /  
Beam angle [°]: 42°

Number of lamps for optical assembly: 1  
Socket: /  
Ballast losses [W]: 2.2  
Colour temperature [K]: 3000  
CRI: 90  
Wavelength [Nm]: /  
MacAdam Step: 2


#### Polar

	Lux			
	h	d	Em	Emax
<b>CIE</b> nL 0.80 99-100-100-100-80 UGR <10-<10 <b>DIN</b> A.61 <b>UTE</b> 0.80A+0.00T F*1=991 F*1+F*2=998 F*1+F*2+F*3=999 <b>CIBSE</b> LG3 L<1500 cd/m² at 65°	2	1.5	1025	1264
	4	3.1	256	316
	6	4.6	114	140
	8	6.1	64	79

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	72	68	66	63	67	65	65	62	78
1.0	75	72	69	67	71	69	68	66	82
1.5	79	76	74	73	75	74	73	70	88
2.0	81	79	78	77	78	77	76	74	93
2.5	83	81	80	79	80	79	78	76	95
3.0	84	83	82	81	82	81	80	78	97
4.0	85	84	84	83	83	82	81	79	99
5.0	85	85	84	84	84	83	82	80	100

Luminance curve limit

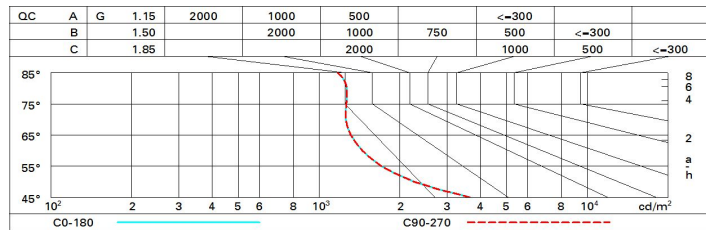

UGR diagram

Corrected UGR values (at 3000 lm bare lamp luminous flux)											
Reflect.:		viewed crosswise					viewed endwise				
ceiling	cav	0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room dim											
x	y										
2H	2H	8.7	9.3	9.0	9.5	9.7	8.7	9.3	9.0	9.5	9.7
	3H	8.7	9.2	9.0	9.5	9.7	8.6	9.1	8.9	9.4	9.7
	4H	8.7	9.1	9.0	9.4	9.7	8.5	9.0	8.9	9.3	9.6
	6H	8.7	9.1	9.0	9.4	9.7	8.5	8.9	8.8	9.2	9.6
	8H	8.7	9.1	9.0	9.4	9.7	8.4	8.9	8.8	9.2	9.5
12H	8.6	9.1	9.0	9.4	9.7	8.4	8.8	8.8	9.2	9.5	
4H	2H	8.5	9.0	8.9	9.3	9.6	8.7	9.1	9.0	9.4	9.7
	3H	8.5	9.0	8.9	9.3	9.6	8.6	9.0	9.0	9.4	9.7
	4H	8.6	8.9	9.0	9.3	9.7	8.6	8.9	9.0	9.3	9.7
	6H	8.6	8.9	9.0	9.3	9.7	8.5	8.8	8.9	9.2	9.7
	8H	8.6	8.9	9.0	9.3	9.8	8.5	8.8	8.9	9.2	9.6
12H	8.6	8.9	9.1	9.3	9.8	8.5	8.7	8.9	9.1	9.6	
8H	4H	8.5	8.8	8.9	9.2	9.6	8.6	8.9	9.0	9.3	9.8
	6H	8.6	8.8	9.0	9.3	9.7	8.6	8.8	9.1	9.3	9.8
	8H	8.6	8.8	9.1	9.3	9.8	8.6	8.8	9.1	9.3	9.8
	12H	8.6	8.8	9.1	9.3	9.8	8.6	8.8	9.1	9.2	9.8
12H	4H	8.5	8.7	8.9	9.1	9.6	8.6	8.9	9.1	9.3	9.8
	6H	8.5	8.7	9.0	9.2	9.7	8.6	8.8	9.1	9.3	9.8
	8H	8.6	8.8	9.1	9.2	9.8	8.6	8.8	9.1	9.3	9.8
Variations with the observer position at spacing:											
S =	1.0H	5.3 / -4.9				5.3 / -4.9					
	1.5H	8.0 / -5.3				8.0 / -5.3					
	2.0H	10.0 / -5.5				10.0 / -5.5					