


Front Light

Design iGuzzini

iGuzzini

Last information update: May 2018



Warm White - Wide Flood Optic

Product code
N290

Technical description

Adjustable spotlight with adapter for installation on a mains voltage track. Luminaire made of die-cast aluminium. Spotlight double adjustability allows a 360° rotation about the vertical axis and 90° tilting relative to the horizontal plane. Mechanical aiming locks both for rotation about the vertical axis and tilting relative to the horizontal plane. Equipped with electronic ballast. Luminaire complete with LED unit, C.O.B. technology, and wide flood optic with warm white colour 3000K.

Installation

On an electrified track

Dimension (mm)
Ø92x127

Colour
White (01) | Black (04) | Grey/Black (74)

Weight (Kg)
0.95

Mounting

three circuit track

Wiring

product complete with electronic components

Complies with EN60598-1 and pertinent regulations

IP20 IP40 for optical assembly



Product configuration: N290

Product characteristics

Total lighting output [Lm]: 1658
Total power [W]: 15.4
Luminous efficacy [Lm/W]: 107.6
Life Time: > 50,000h - L80 - B10 (Ta 25°C)


Total luminous flux at or above an angle of 90° [Lm]: 0
Emergency luminous flux [Lm]: /
Voltage [V]: -
Number of optical assemblies: 1

Optical assembly Characteristics Type 1

Light Output Ratio (L.O.R.) [%]: 79
Lamp code: LED
ZVEI Code: LED
Nominal power [W]: 14
Nominal luminous [Lm]: 2100
Lamp maximum intensity [cd]: /
Beam angle [°]: 56°

Number of lamps for optical assembly: 1
Socket: /
Ballast losses [W]: 1.4
Colour temperature [K]: 3000
CRI: 80
Wavelength [Nm]: /
MacAdam Step: 2


Polar

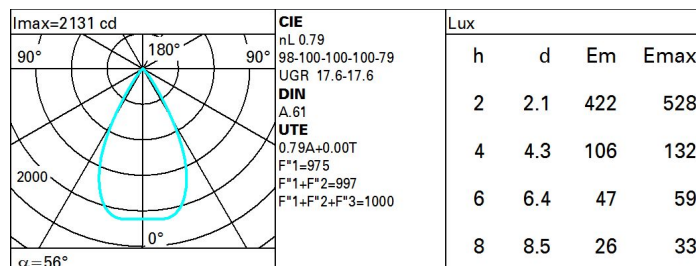

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	70	67	64	62	66	63	63	61	77
1.0	74	70	68	66	69	67	67	64	81
1.5	78	75	73	71	74	72	72	69	88
2.0	80	78	77	75	77	76	75	73	92
2.5	82	80	79	78	79	78	77	75	95
3.0	83	82	81	80	80	80	79	77	97
4.0	84	83	82	82	82	81	80	78	99
5.0	84	84	83	83	82	82	81	79	100

Luminance curve limit

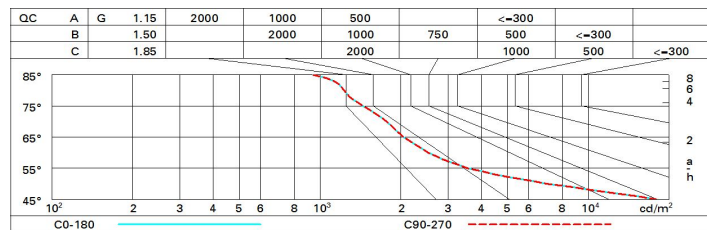

UGR diagram

Corrected UGR values (at 2100 lm bare lamp luminous flux)											
Reflect.:											
ceiling	cav	0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room dim		viewed					viewed				
x	y	crosswise					endwise				
2H	2H	18.1	18.8	18.4	19.0	19.2	18.1	18.8	18.4	19.0	19.2
	3H	18.0	18.6	18.3	18.8	19.1	18.0	18.6	18.3	18.8	19.1
	4H	18.0	18.5	18.3	18.8	19.1	17.9	18.5	18.3	18.7	19.0
	6H	17.9	18.3	18.2	18.7	19.0	17.9	18.3	18.2	18.6	19.0
	8H	17.8	18.3	18.2	18.6	19.0	17.8	18.3	18.2	18.6	18.9
	12H	17.8	18.2	18.2	18.6	18.9	17.8	18.2	18.2	18.6	18.9
4H	2H	17.9	18.5	18.3	18.7	19.0	18.0	18.5	18.3	18.8	19.1
	3H	17.8	18.2	18.2	18.6	18.9	17.8	18.2	18.2	18.6	18.9
	4H	17.7	18.1	18.1	18.5	18.9	17.7	18.1	18.1	18.5	18.9
	6H	17.6	18.0	18.1	18.4	18.8	17.6	18.0	18.1	18.4	18.8
	8H	17.6	17.9	18.0	18.3	18.8	17.6	17.9	18.0	18.3	18.8
	12H	17.6	17.8	18.0	18.3	18.7	17.6	17.8	18.0	18.3	18.7
8H	4H	17.6	17.9	18.0	18.3	18.8	17.6	17.9	18.0	18.3	18.8
	6H	17.5	17.8	18.0	18.2	18.7	17.5	17.8	18.0	18.2	18.7
	8H	17.5	17.7	18.0	18.1	18.6	17.5	17.7	18.0	18.1	18.6
	12H	17.4	17.6	17.9	18.1	18.6	17.4	17.6	17.9	18.1	18.6
12H	4H	17.6	17.8	18.0	18.3	18.7	17.6	17.8	18.0	18.3	18.7
	6H	17.5	17.7	17.9	18.1	18.6	17.5	17.7	18.0	18.1	18.6
	8H	17.4	17.6	17.9	18.1	18.6	17.4	17.6	17.9	18.1	18.6
Variations with the observer position at spacing:											
S =		5.6 / -11.9					5.6 / -11.9				
		8.4 / -13.1					8.4 / -13.1				
		10.4 / -13.6					10.4 / -13.6				