

Last information update: June 2018



spotlight - neutral white - wide flood optic

Product code
P665

Technical description

Adjustable spotlight with adapter for installation on mains voltage track for LED source with CoB technology, Neutral White (4000K) emission. Electronic control gear housed inside the track-mounted power supply box. The luminaire is made of die-cast aluminium and thermoplastic. OPTI BEAM superpure aluminium reflector with high luminous efficacy and uniform distribution, wide flood optic. Features 90° inclination on the horizontal plane and 360° rotation around the vertical axis, with mechanical locking device for aiming. Passive cooling system. Possibility of installing a refractor, to be ordered separately, for elliptical light beam distribution.

Installation

The luminaire can be installed on a standard electrified track or on an appropriate channel incorporating an electrified track.

Dimension (mm)
Ø86x189

Colour
White (01) | Black (04)

Weight (Kg)
1.12

Mounting
three circuit track|ceiling surface

Wiring
product inclusive of electronic components incorporated into the track-mounted box.

Complies with EN60598-1 and pertinent regulations



Product configuration: P665

Product characteristics

Total lighting output [Lm]: 2278
Total power [W]: 23.9
Luminous efficacy [Lm/W]: 95.3
Life Time: > 50,000h - L80 - B10 (Ta 25°C)


Total luminous flux at or above an angle of 90° [Lm]: 0
Emergency luminous flux [Lm]: /
Voltage [V]: -
Number of optical assemblies: 1

Optical assembly Characteristics Type 1

Light Output Ratio (L.O.R.) [%]: 76
Lamp code: LED
ZVEI Code: LED
Nominal power [W]: 20
Nominal luminous [Lm]: 3000
Lamp maximum intensity [cd]: /
Beam angle [°]: 54°

Number of lamps for optical assembly: 1
Socket: /
Ballast losses [W]: 3.9
Colour temperature [K]: 4000
CRI: 80
Wavelength [Nm]: /
MacAdam Step: 2


Polar

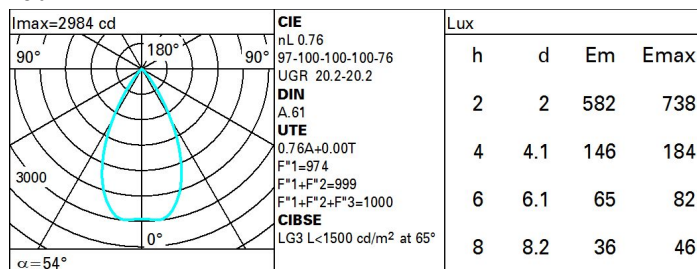

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	68	64	61	59	63	61	61	58	77
1.0	71	68	65	63	67	65	64	62	81
1.5	75	72	70	69	71	70	69	66	88
2.0	77	75	74	73	74	73	72	70	92
2.5	79	77	76	75	76	75	74	72	95
3.0	80	79	78	77	77	77	76	74	97
4.0	80	80	79	79	78	78	77	75	99
5.0	81	80	80	80	79	79	78	76	100

Luminance curve limit

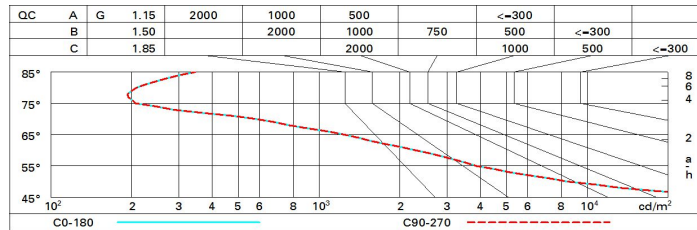

UGR diagram

Corrected UGR values (at 3000 lm bare lamp luminous flux)																
Reflect.:		viewed crosswise					viewed endwise									
ceiling/cav	walls	work pl.	Room dim	x	y	0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30	
2H	2H	20.8	21.5	21.1	21.7	21.9	20.8	21.5	21.1	21.7	21.9	20.7	21.3	21.0	21.5	21.8
	3H	20.7	21.3	21.0	21.5	21.8	20.6	21.1	21.0	21.4	21.7	20.5	21.0	20.9	21.3	21.7
	4H	20.6	21.1	21.0	21.4	21.7	20.5	21.0	20.9	21.3	21.7	20.5	21.0	20.9	21.3	21.7
	6H	20.5	21.0	20.9	21.3	21.6	20.5	21.0	20.9	21.3	21.6	20.5	21.0	20.9	21.3	21.6
	8H	20.5	20.9	20.8	21.2	21.6	20.5	20.9	20.8	21.2	21.6	20.5	20.9	20.8	21.2	21.6
4H	2H	20.6	21.1	21.0	21.4	21.7	20.6	21.1	21.0	21.4	21.7	20.5	20.9	20.8	21.2	21.6
	3H	20.5	20.9	20.8	21.2	21.6	20.4	20.8	20.8	21.1	21.5	20.3	20.6	20.7	21.0	21.4
	4H	20.4	20.8	20.8	21.1	21.5	20.2	20.6	20.7	21.0	21.4	20.2	20.6	20.7	21.0	21.4
	6H	20.3	20.6	20.7	21.0	21.4	20.2	20.5	20.7	20.9	21.4	20.2	20.5	20.7	20.9	21.4
	8H	20.2	20.6	20.7	21.0	21.4	20.2	20.5	20.7	20.9	21.4	20.2	20.5	20.7	20.9	21.4
	12H	20.2	20.5	20.7	20.9	21.4	20.2	20.5	20.7	20.9	21.4	20.2	20.5	20.7	20.9	21.4
8H	4H	20.2	20.6	20.7	21.0	21.4	20.2	20.6	20.7	21.0	21.4	20.2	20.6	20.7	21.0	21.4
	6H	20.2	20.4	20.6	20.9	21.3	20.1	20.3	20.6	20.8	21.3	20.2	20.4	20.6	20.9	21.3
	8H	20.1	20.3	20.6	20.8	21.3	20.1	20.3	20.6	20.8	21.3	20.1	20.3	20.6	20.8	21.3
	12H	20.0	20.2	20.5	20.7	21.2	20.0	20.2	20.5	20.7	21.2	20.0	20.2	20.5	20.7	21.2
12H	4H	20.2	20.5	20.7	20.9	21.4	20.2	20.5	20.7	20.9	21.4	20.2	20.5	20.7	20.9	21.4
	6H	20.1	20.3	20.6	20.8	21.3	20.1	20.3	20.6	20.8	21.3	20.1	20.3	20.6	20.8	21.3
	8H	20.0	20.2	20.5	20.7	21.2	20.0	20.2	20.5	20.7	21.2	20.0	20.2	20.5	20.7	21.2
Variations with the observer position at spacing:																
S =	1.0H	5.3 / -17.5					5.3 / -17.5									
	1.5H	8.1 / -21.6					8.1 / -21.6									
	2.0H	10.1 / -25.1					10.1 / -25.1									