


Last information update: May 2018

**Minimal Angular Module - General Down Light - Warm LED - DALI****Product code**

Q395

**Technical description**

Angular element for Minimal (frameless) flush with ceiling version profiles; including a Neutral LED module. Methacrylate opal screen (diffused general light); screen set up for connecting several lengths by overlapping. Built-in DALI dimmable control gear. Pass-through wiring for continuous lines:

**Installation**

Installation can be recessed, surface, ceiling and pendant-mounted using suitable accessories to be ordered separately.

**Dimension (mm)**

658x658x105

**Colour**

Aluminium (12)

**Weight (Kg)**

5

**Mounting**

ceiling recessed|ceiling surface|ceiling pendant

**Wiring**

The angular profile is supplied with pass-through wiring for continuous lines. Quick coupling terminal blocks to simplify connections between the luminaires. LED module complete with integrated dimmable DALI control gear.

**Notes**

Take care when configuring the system; to complete a continuous line with an angular profile correctly, two initial modules are required, one for each side of the corner.

Complies with EN60598-1 and pertinent regulations



IP20



pending

**Product configuration: Q395****Product characteristics**

Total lighting output [Lm]: 3751.4  
 Total power [W]: 38.8  
 Luminous efficacy [Lm/W]: 96.7  
 Life Time: > 50,000h - L80 - B10 (Ta 25°C)


Total luminous flux at or above an angle of 90° [Lm]: 0  
 Emergency luminous flux [Lm]: /  
 Voltage [V]: -  
 Number of optical assemblies: 2

**Optical assembly Characteristics Type 1**

Light Output Ratio (L.O.R.) [%]: 67  
 Lamp code: LED  
 ZVEI Code: LED  
 Nominal power [W]: 18  
 Nominal luminous [Lm]: 2800  
 Lamp maximum intensity [cd]: /  
 Beam angle [°]: /

Number of lamps for optical assembly: 1  
 Socket: /  
 Ballast losses [W]: 1.4  
 Colour temperature [K]: 3000  
 CRI: 80  
 Wavelength [Nm]: /  
 MacAdam Step: 3

**Polar**

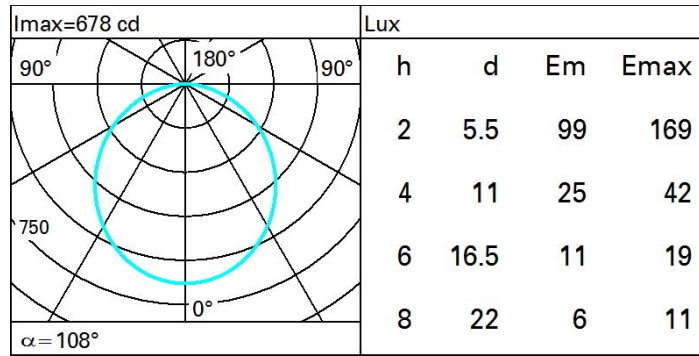

**Isolux**

