


Last information update: June 2018



**Frame 15 cells - Medium beam - LED**

**Product code**  
Q516


**Technical description**

Linear miniaturised recessed luminaire with 15 optical elements for LED lamps - fixed optics. Despite the ultracompact size of the product, the patented technology of the optic system guarantees an efficient flow and a high level of controlled glare visual comfort. Main body with die-cast aluminium radiant surface, version with perimeter surface frame. Metallised, thermoplastic, high definition Opti Beam reflectors, integrated in a set-back position in the anti-glare screen. Supplied with DALI power supply unit connected to the luminaire.

**Installation**

Recessed with steel wire springs for false ceilings from 1 to 25 mm thick - preparation hole 24 x 276.

**Dimension (mm)**  
280x28x50



**Colour**

White (01) | White/Brass (41) | Black/Black (43) | Black/White (47) | Grey/Black (74) | (E7)

**Weight (Kg)**  
0.75

**Mounting**

wall recessed|ceiling recessed

**Wiring**

On the power supply unit with terminal board included.

**Notes**

.

Complies with EN60598-1 and pertinent regulations



**Product configuration: Q516**

**Product characteristics**

Total lighting output [Lm]: 1817  
Total power [W]: 33  
Luminous efficacy [Lm/W]: 55.1  
Life Time: > 50,000h - L80 - B10 (Ta 25°C)

Total luminous flux at or above an angle of 90° [Lm]: 0  
Emergency luminous flux [Lm]: /  
Voltage [V]: 230  
Number of optical assemblies: 1

**Optical assembly Characteristics Type 1**

Light Output Ratio (L.O.R.) [%]: 79  
Lamp code: LED  
ZVEI Code: LED  
Nominal power [W]: 29  
Nominal luminous [Lm]: 2300  
Lamp maximum intensity [cd]: /  
Beam angle [°]: 24°

Number of lamps for optical assembly: 1  
Socket: /  
Ballast losses [W]: 4  
Colour temperature [K]: 3000  
CRI: 90  
Wavelength [Nm]: /  
MacAdam Step: 3


**Polar**

	<b>Imax=8395 cd</b> 90° 180° 90° 9000 0° α=24°	<b>CIE</b> nL 0.79 100-100-100-100-79 UGR <10-<10 <b>DIN</b> A.61 <b>UTE</b> 0.79A+0.00T F*1=999 F*1+F*2=1000 F*1+F*2+F*3=1000 <b>CIBSE</b> LG3 L<500 cd/m <sup>2</sup> at 65°	<b>Lux</b> h d Em Emax 2 0.9 1743 2099 4 1.7 436 525 6 2.6 194 233 8 3.4 109 131
--	--	--	---

**Utilisation factors**

R	77	75	73	71	55	53	33	00	DRR
K0.8	71	68	65	63	67	65	64	62	78
1.0	75	71	69	67	70	68	68	66	83
1.5	78	76	74	72	75	73	72	70	89
2.0	81	79	77	76	78	76	76	73	93
2.5	82	81	80	79	80	79	78	76	96
3.0	83	82	81	81	81	80	79	77	98
4.0	84	83	83	82	82	82	80	79	99
5.0	84	84	84	83	83	82	81	79	100

**Luminance curve limit**

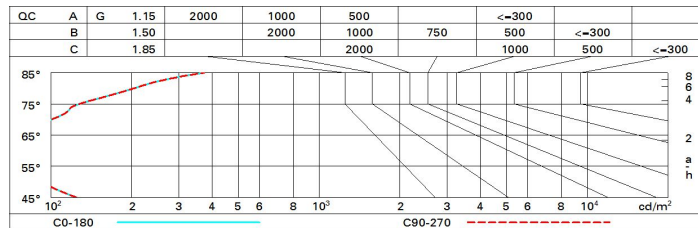

**UGR diagram**

Corrected UGR values (at 2300 lm bare lamp luminous flux)											
Reflect.:											
ceiling/cav		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room dim		viewed					viewed				
x	y	crosswise					endwise				
2H	2H	2.4	4.5	2.8	4.8	5.2	2.4	4.5	2.8	4.8	5.2
	3H	2.3	3.9	2.6	4.2	4.5	2.3	3.9	2.6	4.2	4.5
	4H	2.2	3.5	2.6	3.9	4.2	2.2	3.5	2.6	3.9	4.2
	6H	2.2	3.2	2.5	3.5	3.9	2.1	3.2	2.5	3.5	3.9
	8H	2.1	3.1	2.5	3.5	3.9	2.1	3.1	2.5	3.5	3.8
	12H	2.1	3.1	2.5	3.5	3.8	2.0	3.1	2.5	3.4	3.8
4H	2H	2.2	3.5	2.6	3.9	4.2	2.2	3.5	2.6	3.9	4.2
	3H	2.1	3.1	2.5	3.4	3.8	2.1	3.1	2.5	3.4	3.8
	4H	1.9	2.9	2.4	3.3	3.7	1.9	2.9	2.4	3.3	3.7
	6H	1.6	3.3	2.1	3.7	4.2	1.6	3.3	2.1	3.7	4.2
	8H	1.5	3.4	2.0	3.8	4.3	1.4	3.3	1.9	3.8	4.3
	12H	1.4	3.4	1.9	3.8	4.4	1.3	3.3	1.8	3.8	4.3
8H	4H	1.4	3.3	1.9	3.8	4.3	1.5	3.4	2.0	3.8	4.3
	6H	1.4	3.1	1.9	3.6	4.2	1.4	3.2	1.9	3.6	4.2
	8H	1.4	2.9	1.9	3.4	4.0	1.4	2.9	1.9	3.4	4.0
	12H	1.6	2.6	2.1	3.1	3.6	1.5	2.5	2.0	3.0	3.6
12H	4H	1.3	3.3	1.8	3.8	4.3	1.4	3.4	1.9	3.8	4.4
	6H	1.3	2.9	1.9	3.4	4.0	1.4	3.0	1.9	3.5	4.0
	8H	1.5	2.5	2.0	3.0	3.6	1.6	2.6	2.1	3.1	3.6
Variations with the observer position at spacing:											
S =	1.0H	6.9 / -11.5					6.9 / -11.5				
	1.5H	9.7 / -11.7					9.7 / -11.7				
	2.0H	11.7 / -11.8					11.7 / -11.8				