


Last information update: June 2018

**Fixed round recessed luminaire - Minimal - Warm Dimming - flood - Super Comfort****Product code**

QA61

**Technical description**

Minimal round recessed luminaire (frameless). Super Comfort fixed version: the LEDs are set a long way back to minimize glare and guarantee a high level of visual comfort. The main body is made of die-cast aluminium with a radiant surface that guarantees optimum heat dissipation. Metallised, thermoplastic, high definition reflector - flood optic. Die-cast aluminium structure designed for flush with ceiling installation - a specific adapter with a separate code is available for false ceilings. This is indispensable for installing recessed luminaires. The internal ring is made of thermoplastic available in a range of painted and metallised finishes. Safety glass included Warm Dimming LED lamp: when the lamp is dimmed the colour temperature varies from 2700K to 1800K in order to maintain a comfortable light effect and a high color rendering index. Power unit available with a separate code no.

**Installation**

The luminaire is recessed in the adapter (QA82) by means of an anti-fall steel wire spring, previously installed on the ceiling that can be between 12.5 and 25 mm thick. A special steel spring required to extract the main body of the adapter after it has been installed is included in the package.

**Dimension (mm)**

Ø68x91

**Colour**

White (01) | Black (04) | Chrome (10) | Brass (14) | (E6) | (E8)

**Weight (Kg)**

0.13

**Mounting**

ceiling recessed

**Wiring**

DALI dimmable direct current ballast available with a separate code - the recessed fitting includes a cable and a quick-coupling connector to connect it to the connector on the ballast.

**Notes**

A wide range of decorative accessories and diffusers is available.

Complies with EN60598-1 and pertinent regulations



IP20

**Product configuration: QA61.01+QA82.04**

QA82.04: Frame / adapter for Minimal round fixed recessed luminaire Ø75 - Black

**Product characteristics**

Total lighting output [Lm]: 540  
Total power [W]: 10  
Luminous efficacy [Lm/W]: 54  
Life Time: > 50,000h - L70 - B10 (Ta 25°C)


Total luminous flux at or above an angle of 90° [Lm]: 0  
Emergency luminous flux [Lm]: /  
Voltage [V]: -  
Number of optical assemblies: 1

**Optical assembly Characteristics Type 1**

Light Output Ratio (L.O.R.) [%]: 83  
Lamp code: LED  
ZVEI Code: LED  
Nominal power [W]: 10  
Nominal luminous [Lm]: 650  
Lamp maximum intensity [cd]: /  
Beam angle [°]: 46°

Number of lamps for optical assembly: 1  
Socket: /  
Ballast losses [W]: 0  
Colour temperature [K]: /  
CRI: 90  
Wavelength [Nm]: /  
MacAdam Step: 3


# Polar

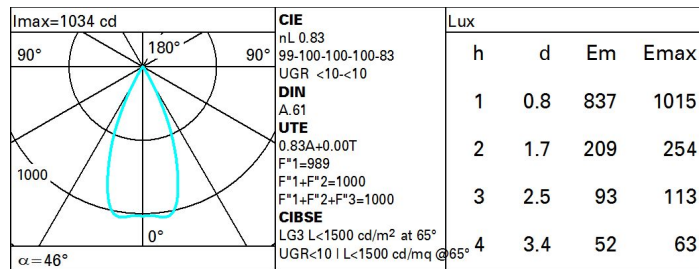

# Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	75	71	68	66	70	68	67	64	78
1.0	78	74	72	70	74	71	71	68	82
1.5	82	79	77	75	78	76	76	73	88
2.0	84	83	81	80	81	80	79	77	93
2.5	86	85	83	82	83	82	81	79	95
3.0	87	86	85	84	85	84	83	81	97
4.0	88	87	87	86	86	86	84	82	99
5.0	89	88	88	87	87	86	85	83	100

# Luminance curve limit

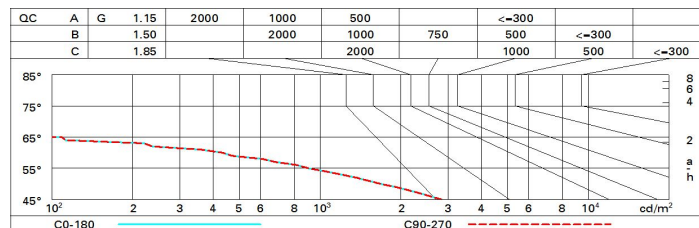

# UGR diagram

Corrected UGR values (at 650 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
		viewed crosswise					viewed endwise				
2H	2H	5.2	5.8	5.5	6.0	6.2	5.2	5.8	5.5	6.0	6.2
	3H	5.0	5.6	5.4	5.8	6.1	5.1	5.6	5.4	5.9	6.1
	4H	5.0	5.5	5.3	5.8	6.1	5.0	5.5	5.3	5.8	6.1
	6H	4.9	5.3	5.2	5.7	6.0	4.9	5.4	5.3	5.7	6.0
	8H	4.9	5.3	5.2	5.6	6.0	4.9	5.3	5.2	5.6	6.0
	12H	4.8	5.2	5.2	5.6	5.9	4.8	5.3	5.2	5.6	5.9
4H	2H	5.0	5.5	5.3	5.8	6.1	5.0	5.5	5.3	5.8	6.1
	3H	4.8	5.3	5.2	5.6	5.9	4.8	5.3	5.2	5.6	5.9
	4H	4.8	5.1	5.2	5.5	5.9	4.8	5.1	5.2	5.5	5.9
	6H	4.7	5.0	5.1	5.4	5.8	4.7	5.0	5.1	5.4	5.8
	8H	4.6	4.9	5.1	5.3	5.8	4.6	4.9	5.1	5.3	5.8
	12H	4.6	4.8	5.0	5.3	5.7	4.6	4.8	5.0	5.3	5.7
8H	4H	4.6	4.9	5.1	5.3	5.8	4.6	4.9	5.1	5.3	5.8
	6H	4.5	4.8	5.0	5.2	5.7	4.5	4.8	5.0	5.2	5.7
	8H	4.5	4.7	5.0	5.1	5.6	4.5	4.7	5.0	5.1	5.6
	12H	4.4	4.6	4.9	5.1	5.6	4.4	4.6	4.9	5.1	5.6
12H	4H	4.6	4.8	5.0	5.3	5.7	4.6	4.8	5.0	5.3	5.7
	6H	4.5	4.7	5.0	5.1	5.6	4.5	4.7	5.0	5.1	5.6
	8H	4.4	4.6	4.9	5.1	5.6	4.4	4.6	4.9	5.1	5.6
Variations with the observer position at spacing:											
S =		1.0H	5.1 / -7.6					5.1 / -7.6			
		1.5H	7.8 / -15.4					7.8 / -15.4			
		2.0H	9.8 / -23.9					9.8 / -23.9			