

Last information update: June 2018

**Up / Down LED plate - ON-OFF - Working UGR < 19 - Warm - L 3588****Product code**  
QC09**Technical description**

LED module set up for housing in intermediate system profiles, ideal for particularly long light lines. High efficiency up + down emission for Working profiles (with a controlled luminance micro-prismatic lower screen). Electronic control gear integrated in the luminaire. Extruded aluminium heat sink; high emission yield flux enhancer. Warm 3000K LED

**Installation**

Module insertion on profiles facilitated by a quick coupling system.

**Colour**

Indeterminate (00)

**Weight (Kg)**

4.8

**Wiring**

Quick coupling terminal block connection to simplify connections between the subsequent modules. Complete with integrated ON-OFF - non-dimmable control gear.

**Notes**

Important: the triple length intermediate luminous module can be used for both initial profiles - L 3594 - for stand-alone applications, and intermediate profiles - L 3594 - for continuous line applications.

Complies with EN60598-1 and pertinent regulations

IP20

**Product configuration: QC09****Product characteristics**

Total lighting output [Lm]: 4992  
Total power [W]: 44.1  
Luminous efficacy [Lm/W]: 113.2  
Life Time: > 50,000h - L90 - B10 (Ta 25°C)

Total luminous flux at or above an angle of 90° [Lm]: 1429  
Emergency luminous flux [Lm]: /  
Voltage [V]: -  
Number of optical assemblies: 1

**Optical assembly Characteristics Type 1**

Light Output Ratio (L.O.R.) [%]: 67  
Lamp code: LED  
ZVEI Code: LED  
Nominal power [W]: 40  
Nominal luminous [Lm]: 7450  
Lamp maximum intensity [cd]: /  
Beam angle [°]: /

Number of lamps for optical assembly: 1  
Socket: /  
Ballast losses [W]: 4.1  
Colour temperature [K]: 3000  
CRI: 80  
Wavelength [Nm]: /  
MacAdam Step: 3


**Polar**

Imax=2219 cd C0-180 90° 2500 0° α=68° / 78°	CIE nL 0.67 67-91-98-71-67 UGR 15.2-15.9 DIN B.53 UTE 0.48C+0.19T F*1=667 F*1+F*2=907 F*1+F*2+F*3=984 CIBSE LG3 L<3000 cd/m² at 65° UGR<16   L<3000 cd/mq @65°	Lux				
		h	d1	d2	Em	Emax
		2	2.7	3.2	388	555
		4	5.4	6.5	97	139
		6	8.1	9.7	43	62
		8	10.8	13	24	35

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	44	38	35	32	36	33	31	26	54
1.0	48	43	39	36	40	37	34	29	61
1.5	54	49	46	44	46	43	40	34	72
2.0	57	53	51	48	49	47	44	38	79
2.5	59	56	54	52	52	50	46	40	83
3.0	60	58	56	54	53	52	48	41	86
4.0	62	60	58	57	55	54	50	43	90
5.0	62	61	60	58	56	55	51	44	92

Luminance curve limit

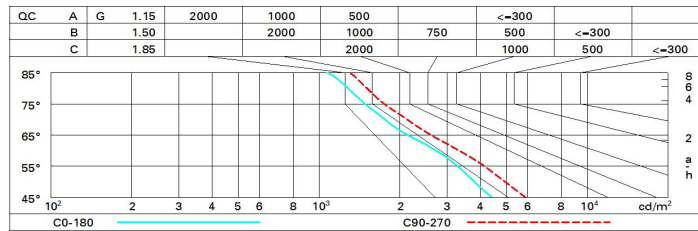

UGR diagram

Corrected UGR values (at 7450 lm bare lamp luminous flux)											
Reflect.:		viewed crosswise					viewed endwise				
ceill/cav	walls	work pl.	Room dim	x	y						
0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30	0.30	
0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30	0.30	
0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	
2H	2H	13.7	14.4	14.4	15.1	15.9	14.9	15.6	15.6	16.3	
	3H	14.3	14.9	15.0	15.6	16.4	15.0	15.7	15.7	16.4	
	4H	14.4	15.0	15.2	15.7	16.6	15.0	15.6	15.7	16.3	
	6H	14.5	15.1	15.3	15.8	16.7	14.9	15.5	15.7	16.2	
	8H	14.6	15.1	15.3	15.8	16.7	14.9	15.4	15.7	16.2	
	12H	14.6	15.1	15.3	15.8	16.7	14.9	15.4	15.6	16.1	
4H	2H	14.0	14.6	14.7	15.3	16.2	15.6	16.2	16.3	16.9	
	3H	14.7	15.2	15.5	15.9	16.8	15.8	16.3	16.6	17.1	
	4H	14.9	15.4	15.7	16.2	17.1	15.9	16.3	16.7	17.1	
	6H	15.1	15.5	15.9	16.3	17.3	15.9	16.3	16.7	17.1	
	8H	15.2	15.5	16.0	16.4	17.3	15.9	16.3	16.7	17.1	
	12H	15.2	15.5	16.0	16.3	17.3	15.9	16.2	16.7	17.0	
8H	4H	15.0	15.3	15.8	16.2	17.1	16.1	16.5	17.0	17.3	
	6H	15.3	15.6	16.1	16.4	17.4	16.2	16.5	17.1	17.4	
	8H	15.4	15.6	16.2	16.5	17.5	16.3	16.5	17.1	17.3	
	12H	15.5	15.7	16.3	16.5	17.6	16.3	16.5	17.1	17.3	
12H	4H	15.0	15.3	15.8	16.1	17.1	16.2	16.5	17.0	17.3	
	6H	15.3	15.5	16.1	16.4	17.4	16.3	16.5	17.1	17.4	
	8H	15.4	15.6	16.3	16.5	17.5	16.3	16.5	17.2	17.4	
Variations with the observer position at spacing:											
S =	1.0H	0.5 / -0.5					0.3 / -0.5				
	1.5H	0.6 / -1.2					0.8 / -1.2				
	2.0H	1.2 / -1.9					1.8 / -1.8				