


Cu-Flex_3 bright



Bollard & Pole | 100-240 V | 3 x powerLED 4.5 W 450 mA | CRI 80
61171W00

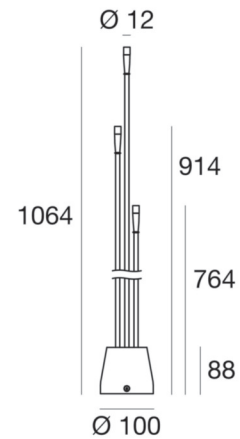

Technical data	
Installation position	Floor
Installation environment	Outdoor
Light Source	LED
Optics	General Lighting
Power	4.5 W
Luminous flux (source)	492 lm
Frequency	50 - 60 - Hz
CCT / Tonalità	3000 K
Colour rendering index	80 Ra
AC / DC	AC-DC
Safety class	2
IP	IP65
Glow wire test	650°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
ETL	No
Driver included	Yes
Induzione	No
Emergency mode	No
Motion sensor	No
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	No
Resin potting	No
Net weight	0.776 Kg

Finishing casing	
Material	copper
Processing	burnishing

Finishing diffuser	
Material	PMMA
Colour	sandblasted

Cu-Flex_3 bright



Bollard & Pole | 100-240 V | 3 x powerLED 4.5 W 450 mA | CRI 80
61171W00

Multiple emission bollard & pole for outdoor application. The warm white LED light source with a general lighting light distribution is composed of 3 powerLED LEDs with CCT of 3000 K and a CRI 80; the source luminous flux is 492 lm, with a 109.3 lm/W nominal luminous efficacy.

The device body is made of copper, processed by means of burnishing; the diffuser is made of pmma. The ingress protection degree is IP65; the total weight is of 0.776 kg. The power supply driver is included in the delivery.

The total absorbed power is 4.5 W.


The device features protection class II and can be floor-mounted.

Illuminotechnical Features

Luminous flux (source)	492 lm
Colour temperature	3000 K
Standard Deviation of Colour Matching	3 Step MacAdam
Colour rendering index	80 Ra



Cu-Flex_3 bright | Bollard & Pole | Accessories
61171W00



Pegs

Code
14931