


Floor Lamp | 220-240 V | topLED 58 W 500 mA | DALI | Auto-dimming | CRI 80  
63274N00

   C.C.    

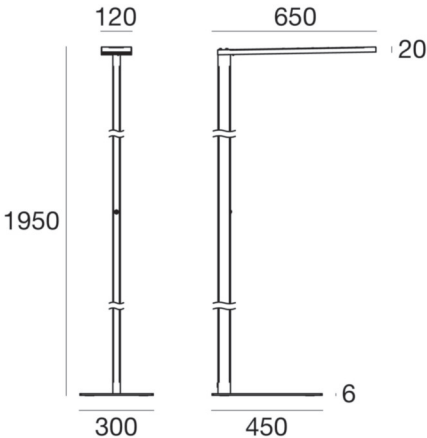

Technical data	
Installation position	Floor
Installation environment	Indoor
Light Source	LED
Optics	General Lighting
Power	58 W
Luminous flux (source)	6330 lm
Frequency	50 - 60 - Hz
CCT / Tonalità	4000 K
Colour rendering index	80 Ra
AC / DC	AC
Safety class	1
IP	IP20
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
ETL	No
Fire Rated (BS 476 PT21 compliant)	No
Driver included	Driver
Dimmable article	DALI - Auto-dimming
Induction	No
Emergency mode	No
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	No
Resin potting	No
Type of light emission	Double emission
Net weight	14.5 Kg

Finishing casing	
Material	Iron
Colour	embossed white RAL 9003
Processing	Coating

Floor Lamp | 220-240 V | topLED 58 W 500 mA | DALI | Auto-dimming | CRI 80  
**63274N00**

Double emission floor lamp for indoor application. The natural white LED light source with a general lighting light distribution is composed of 121 topLED LEDs with CCT of 4000 K and a CRI 80; the source luminous flux is 6330 lm, with a 109.1 lm/W nominal luminous efficacy.

The device body is made of iron and features a embossed white ral 9003 finish, processed by means of coating. The ingress protection degree is IP20; the total weight is of 14.5 kg.

The total absorbed power is 58 W.

The device features protection class I and can be floor-mounted.

Illuminotechnical Features	
Light Output Ratio (LOR)	53 %
Luminous flux (source)	6330 lm
Luminaire luminous flux	3415 lm
Consumption	62 W
Luminaire efficacy	55 lm/W
Colour temperature	4000 K
Colour rendering index	80 Ra

