


References

 KOI LS LED DIM0-10V

 KOI LS LED DIMBT

Certificates



Class I



Dimmable:
120 - 277V

Bluetooth Dimming:
220 - 240V



Only wood shade colours are FSC® certified

Wood shade colours

-  20 Ivory White
-  22 Natural Beech



Components



Metal Canopy
Brushed nickel
56 x 16 x 6 cm

Electrical cable
Transparent
5 m drop

Steel cable
4 x 5 m drop



Box size
Body
box 1: 229 x 80 x 92 cm
1,685 m³ | 117 Kg
Head + Tail
box 2: 166 x 107 x 188 cm
3,339 m³ | 148 Kg





Weight
Gross - 265 Kg
Net - 33 Kg





Required
Shades mount
Difficulty: *****





LED
 Linear Module
24 x 5,5 W

Energy class
 LED integrated



Driver
 MEANWELL
1 unit - Ref. NPF 90D-30
1 unit - Ref. NPF 60D-20
 MEANWELL
1 unit - Ref. NPF 90D-30
1 unit - Ref. NPF 60D-20
+
Bluetooth Control - CASAMBI / ELT
1 unit - Ref. CBU - ASD
Driver housed in canopy.

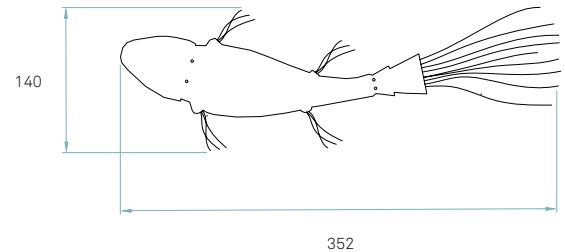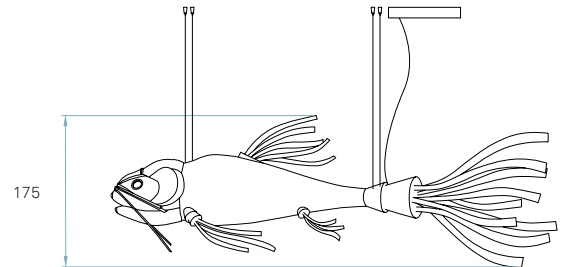

Details

Input Voltage	Luminous Flux	CRI	Watt.	CCT	Lifetime (L70)
120 - 277V / 220 - 240V	N/A	90	160 W	4000 K (20)	40000h
		80		5000 K (22)	