

GOLDEN RING - L08101.080.0108

Enzo Panzeri 2015

Suspension lighting fixture for interiors, with direct light emission.

Pickled sheet metal structure in polyacrylic paint.

Aluminium dissipation plates.

Aluminium and pickled sheet metal covers in matt white, black or bronze polyacrylic paint, or with gold leaf coating.

Diffuser in modelled polycarbonate with opaline finish.

Suspension kit with griplocks and 2m (78,7") long steel cables.

2,5m (98,4") long power cable in transparent PVC.


Power canopy with galvanized sheet metal ceiling bracket and pickled sheet metal covering in matt white, black or bronze polyacrylic paint, or with gold leaf coating.



DATA SHEET



Code	L08101.080.0108
System power consumption	48W
Efficacy	71.27lm/W
Light source	LED
Light source lifetime	L80 (B20) 60'000h
Colour temperature	3000K Ra >80
Light distribution	diffused
Power supply	220-240V AC
Frequency	50/60Hz
Electrical configuration	ON-OFF
Driver	integrated included
Nominal luminous flux	6090lm
Lumen output	3421lm
Efficiency	56.174%
Weight	10,2400Kg
Protection degree	IP40
Resistenza alla prova del filo incandescente	850°
Colour tollerances	SDCM 3
Packing dimensions (cm)	90 x 25 x 90

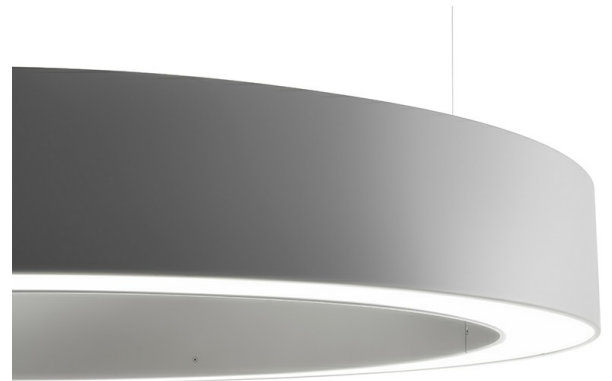

Colour

matt white



ACCESSORIO

M8101-3 - matt white
Canopy for power supply and to join 3 steel cables.



TECHNICAL DRAWING





DIAGRAMMA POLARE



cd/klm
—— C0 - C180 —— C90 - C270

$\eta = 100\%$

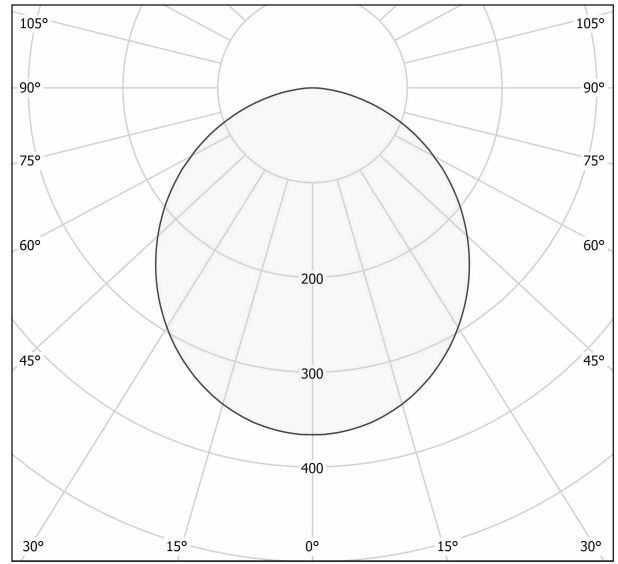