



References

NWAV S LED DIM0-10V

NWAV S LED DIMBT

Awards



Certificates



Class I

Dimmable:  
120 - 277V

Bluetooth Dimming:  
220 - 240V



Wood shade colours

Exterior & Interior

26 Red / 24 Yellow

or

Exterior & Interior

30 Turquoise / 24 Yellow

or

Exterior & Interior

28 Blue / 24 Yellow

or

Exterior & Interior

21 Cherry / 20 White

If you would like any other colour combinations please consult with our offices.



REF. NWAV S LED 28-24  
New Wave

Components



**Metal canopy**  
Brushed Nickel  
34 x 11,5 x 5 cm

**Electrical cable**  
Transparent 2 m drop



**Steel cable**  
4 x 2 m drop



Packaging



**Box size**  
121 x 31 x 34 cm

**Box volume**  
0,128 m³

**Weight**  
Gross - 6 Kg  
Net - 2,8 Kg

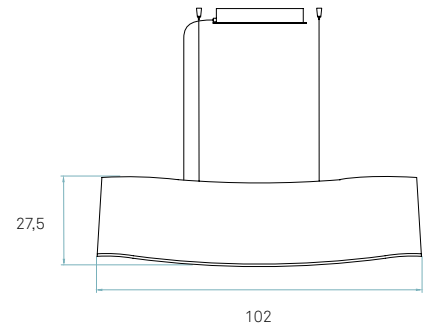

**LED**  
 Linear Module  
2 x 5,5 W 350mA

**Energy class**  
 LED integrated



**Driver**  
 EFORE  
1 unit - Ref. RCL015-0440A  
 EFORE  
1 unit - Ref. RCL015-0440A  
+ Bluetooth Control - CASAMBI / ELT  
1 unit - Ref. CBU - ASD  
Driver housed in canopy.

Details

Input Voltage	Luminous Flux *	CRI	Watt.	CCT	Lifetime (L70)
120 - 277V / 220 - 240V	760 lm	90	16 W	3000 K	40000h

\* Measurements taken using Blue exterior & Yellow interior shades, Veneer Ref: 28 Blue & 24 Yellow