







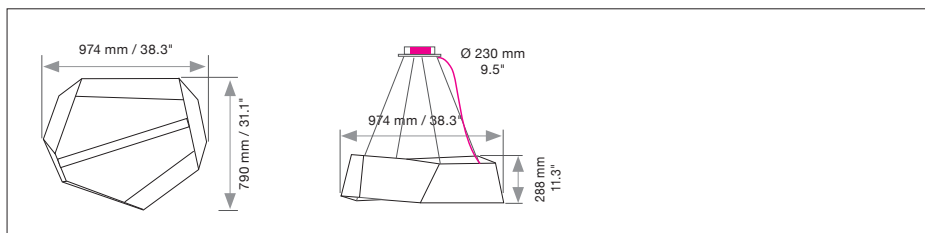


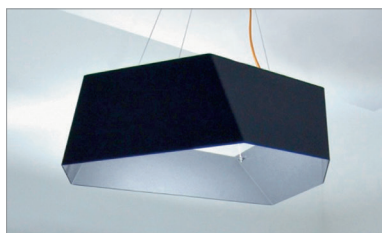




SATTLER

ANGOLO

Housing: Aluminium housing, powder coated. Pendant light with steel cable suspension, canopy and red power supply cable.

Design: MICHAEL SCHMIDT



Sizes	Size: L x W x H mm	inches	LED Watt	Lumen ¹⁾	weight kg ²⁾ / lbs ²⁾	Item No.	LED	Dimming	LED	Finishes	Power Supply cable	Mounting Version	
	974 x 790 x 288 mm	38.3 x 31.1 x 11.3"	14+10	867+246	14 / 30.8	700.	x x.	x x.	x x.	x x.	x x x.	x	
LED 24V CRI > 90 *CRI > 80		Neutral-white	4000 K	(Standard)	x x x.	69.	x x.	x x.	x x.	x x x.	x		
		Cold-white	5000 K	(Optional)	x x x.	62.	x x.	x x.	x x.	x x x.	x		
		Warm-white	3000 K	(Optional)	x x x.	63.	x x.	x x.	x x.	x x x.	x		
		Extra warm-white	2700 K	(Optional)	x x x.	61.	x x.	x x.	x x.	x x x.	x		
		Extra warm-white	2200 K*	(Optional)	x x x.	22.	x x.	x x.	x x.	x x x.	x		
Dimming		Without Dimmer	(Standard)	x x x.	x x.	02.	00.	x x.	x x x.	x			
		DMX	(Optional)	x x x.	x x.	32.	00.	x x.	x x x.	x			
		Dimmable 1 - 10 V	(Optional)	x x x.	x x.	42.	00.	x x.	x x x.	x			
		Dimmable 0 - 10 V	(Optional)	x x x.	x x.	52.	00.	x x.	x x x.	x			
		Dimmable DALI	(Optional)	x x x.	x x.	62.	00.	x x.	x x x.	x			
		Dimmable CASAMBI	(Optional)	x x x.	x x.	82.	00.	x x.	x x x.	x			
		Bluetooth 4.0 remote control through app. ENOCEAN wireless push button	(Optional)	x x x.	x x.	92.	00.	x x.	x x x.	x			
Finishes	 11 white (Optional)  10 black fine textured												
Power Supply Cable (Standard)	 Z 75 red (Optional)  Z 70 Silver  Z 71 white  Z  Z 73 black  Z 74 orange  Z 76 green												
Mounting Version	 4-point suspension (Standard)												

Including steel cable suspension 5000mm / 197" and power supply cable 5000mm / 197"

Dimensions of canopy			For use with Mounting Version
Type	Size mm / inch cover plate / body / H		
DB 230	Ø 230 / 210 / 60 mm / 9.5 / 8.3 / 2.3"	E	
Canopy finish: white (11) contact factory for other finishes			
USA/Canada: Canopy mounts to 4" octagonal junction box.			

x x x.	x x.	x x.	x x.	x x.	x x x.	E
Complete order number						

Input voltage for all external power supply units and canopy is **90-277 VAC 47-63 Hz**



Handcrafted in Germany, certified quality



Conforms to UL-STD 1598 Certified to CSA-STD C22.2 No.250.0-08



IP 20 Protective rating



Light distribution direct / indirect



Protection class III: only suitable for very low voltage supply (<50V)



Luminaires are suitable for mounting on ordinary flammable materials, which have an inflammation point of at least 200° C. / 392° F.