
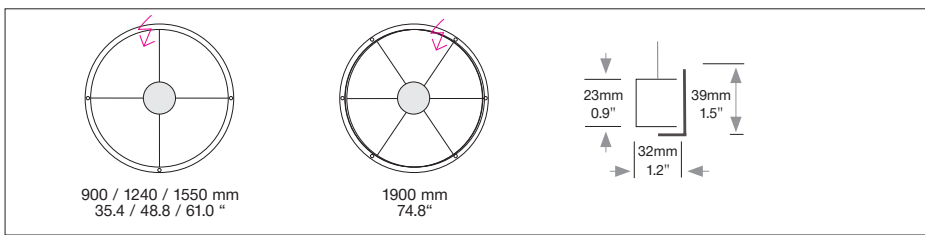


SATTLER

CIRCOLO MINI

Housing: Circular aluminium profile, opal diffuser (L-shaped) on the inside
Design: SATTLER

www.sattler-lighting.com

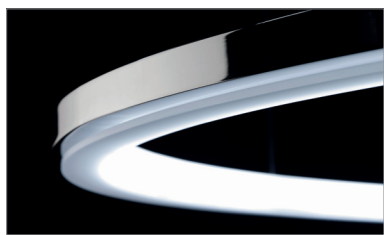

Sizes		Size: L x W x H mm	inches	LED Watt	Lumen 1)	weight kg 2) / lbs 2)	Item No.	LED	Dimming	LED	Finishes	Power Supply cable	Mounting Version
Ø	900 mm		35.4"	51	2.339	3.5 / 7.7	742.	X X.	X X.	X X.	X X.	X X X.	X
Ø	1240 mm		48.8"	71	3.175	5.5 / 12.1	743.	X X.	X X.	X X.	X X.	X X X.	X
Ø	1550 mm		61.0"	88	4.061	6.0 / 13.2	744.	X X.	X X.	X X.	X X.	X X X.	X
Ø	1900 mm		74.8"	108	4.888	7.0 / 15.4	745.	X X.	X X.	X X.	X X.	X X X.	X

LED			Warm-white	3000 K	(Standard)	X X X.	63.	X X.	X X.	X X.	X X X.	X
24V			Neutral-white	4000 K	(Optional)	X X X.	69.	X X.	X X.	X X.	X X X.	X
CRI > 90			Extra warm-white	2700 K	(Optional)	X X X.	61.	X X.	X X.	X X.	X X X.	X
CRI > 80			Extra warm-white	2200 K	(Optional)	X X X.	22.	X X.	X X.	X X.	X X X.	X
			RGB colour control**		(Optional)	X X X.	60.	X X.	00.	X X.	X X X.	X

** (only in combination with dimming DMX , DALI, CASAMBI)

Dimming			Without Dimmer	(Standard)	X X X.	X X.	01.	00.	X X.	X X X.	X
			DMX (RGB possible)	(Optional)	X X X.	X X.	31.	00.	X X.	X X X.	X
			Dimmable 1 - 10 V	(Optional)	X X X.	X X.	41.	00.	X X.	X X X.	X
			Dimmable 0 - 10 V	(Optional)	X X X.	X X.	51.	00.	X X.	X X X.	X
			Dimmable DALI (RGB possible)	(Optional)	X X X.	X X.	61.	00.	X X.	X X X.	X
			Dimmable CASAMBI (RGB possible)	(Optional)	X X X.	X X.	81.	00.	X X.	X X X.	X
			Bluetooth 4.0 remote control through app.								
			ENOCEAN wireless push button	(Optional)	X X X.	X X.	91.	00.	X X.	X X X.	X

Finishes			11	(Optional)	22 *	27 *	30	32	33				
(Standard)			white										
					aluminium polished	brush-finished aluminium	anthracite	crocodile black	sand silver fine textured				
					35	36	37	38	10				
					gold	brass	bronze fine textured	copper	black fine textured				
					XX								
					Custom finish								

Power Supply Cable			000	(Optional)	Z 70	Z 71	Z 72	Z 73				
(Standard)			without Mounting Version F									
					Silver	white	grey	black				
					Z 74	Z 75	Z 76	000				
					orange	red	green	Mounting Version R, T, K				

Technical data is subject to change. Errors and omissions excepted 1) Net lumen output: Losses due to diffusors and reflectors are considered. Lumen values refer to an ambient temperature of max. 35° C / 95° F. 2) Weight of lights without remote technical unit or canopy.



21.8.18 CIRCOLO MINI

SATTLER


CIRCOLO MINI

Housing: Circular aluminium profile, opal diffuser (L-shaped) on the inside
 Design: SATTLER


www.sattler-lighting.com

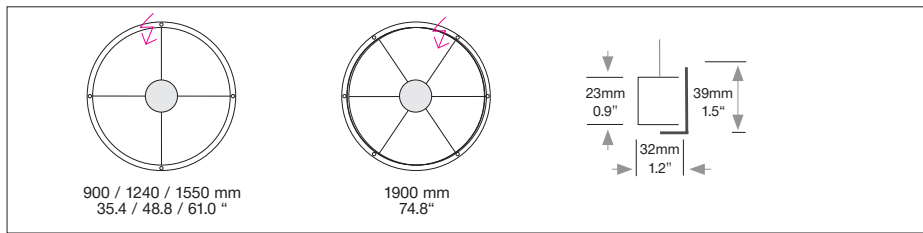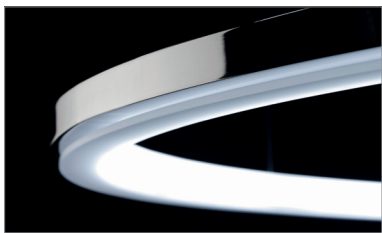


Mounting Version




up to Ø 1550 mm
4-point suspension
1900 mm 6-point suspension with external power supply unit in suspended ceiling




up to Ø 1550 mm
4-point suspension
1900 mm 6-point suspension with external power supply unit in separate canopy




suspension through canopy




4 current-carrying steel cables. Not in combination with RGB




Suspension with current-carrying steel cables and cavity wall box. Not in connection with RGB.




Suspension with pendant canopy PB 366 and steel cables
(a) 5000 mm / 196.8" +
(b) 3000 mm / 118.1"



Suspension with pendant canopy PB 366 and current-carrying steel cables.
(a) 5000 mm / 196.8" +
(b) 3000 mm / 118.1"
Not in combination with RGB.



Direct ceiling mounting
50mm / 1.9" with external power supply unit in suspended ceiling



Suspension point as clamping unit with 4 cables and remote technical unit in suspended ceiling.

Item No.	LED	Dimming	LED	Finishes	Power Supply cable	Mounting Version
X X X.	X X.	X X.	X X.	X X.	X X X	.

A, B, G, R, K = Distance of external power supply unit to light fixture max. 10m / 394"

S, T, K, E, F = Minimum suspension height half the diameter of light fixture, maximum suspension height two times diameter of light fixture

Including steel cable suspension 3000mm/118";

Version S,T 5000 + 3000mm / 197"+118" and/or power supply cable 5000mm/197"

X X X.	X X.	X X.	X X.	X X.	X X X	X
--------	------	------	------	------	-------	---

Complete order number

Dimensions of external power supply units

Typ	Size mm / inch	For use with Mounting Version
DE 1F	360 x 150 x 85 mm / 14.2 x 5.9 x 3.3"	A, G, R, K

Dimensions of canopy (1 LED Stripe)

Typ	Size mm / inch	For use with Mounting Version
DB 230	Ø 230 / 210 mm / 9.5 x 8.3" up to size Ø 900 mm / 35.4"	B, E, F
DB 290	Ø 290 / 260 mm / 11.4 x 10.2" up to size Ø 1550 mm / 61.0"	B, E, F
DB 350	Ø 350 / 320 mm / 13.7 x 12.5" up to size Ø 1900 mm / 174.8"	B, E, F
PB 366	Ø 90 H 366 mm / 3.5 x 14.4" up to size Ø 1900 / 74.8"	S, T

Canopy finish: white (11) contact factory for other finishes
 USA/Canada: Canopy mounts to 4" octagonal junction box.

Input voltage for all external power supply units and canopy is **90-277 VAC 47-63 Hz**

Optional



LED spot in canopy

(Mini size Ø 900 mm, Dimension canopy DB 290)

762. 67. 01. 04. 11. (white)

4W/20°-40°, 400 Lumen (order separately). Light fixture and spot are switchable and dimmable together only.




CASAMBI wall-switch

207. 00. 00. 00. 11 (white)

207. 00. 00. 00. 10 (black)

Casambi wall-switch is a wireless user interface that can be configured via the Casambi app. The four target buttons can control a scene or an animation of the user's choice or simply one luminaire, one luminaire group or all lights together if so desired. Up to 4 groups may be separately programmed. It comes with a wall mounting plate. The switch can be attached to the plate as it is equipped with magnets.



Ceiling fixation for mounting version A, G (if requested)

200. 00. 00. 00. 11 (white)

Ceiling opening for power supply cable. Consisting of a cavity ceiling box with 80mm round metal cover. Powder coated in white, fine textured. Applicable to mounting version A, G.

21.8.18 CIRCOLO MINI



Handcrafted in Germany, certified quality



Conforms to UL-STD 1598 Certified to CSA-STD C22.2 No.250.0-08



Protection class III: only suitable for very low voltage supply (<30V)



Luminaires are suitable for mounting on ordinary flammable materials, which have an inflammation point of at least 200° C. / 392° F.