


CIRCOLO

I-Version

Housing: Circular aluminium profile, opal acrylic diffuser on the inside
Design: SATTLER, Patented

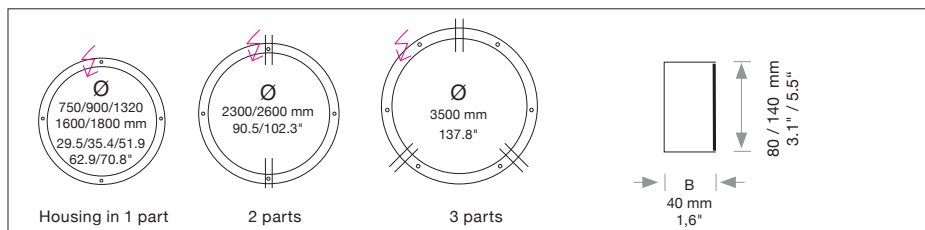

	Size: L x W x H mm	inches	LED Watt	Lumen ¹⁾	weight kg ²⁾ / lbs ²⁾	Item No.	LED	Dimming	LED	Finishes	Power Supply cable	Total height	Mounting Version
Sizes	Ø 750 / 29.5"	H 80 / 3.1" B 40 / 1.6"	48	3.629	8 / 17.6	252	x x.	x x.	x x.	x x.	x x x.	80	x
	Ø 900 / 35.5"	H 80 / 3.1" B 40 / 1.6"	58	4.388	10 / 22.0	253	x x.	x x.	x x.	x x.	x x x.	80	x
	Ø 1320 / 35.5"	H 80 / 3.1" B 40 / 1.6"	84	6.523	20 / 44.0	254	x x.	x x.	x x.	x x.	x x x.	80	x
	Ø 1600 / 62.9"	H 80 / 3.1" B 40 / 1.6"	102	7.991	25 / 55.1	255	x x.	x x.	x x.	x x.	x x x.	80	x
	Ø 1800 / 70.8"	H 80 / 3.1" B 40 / 1.6"	114	9.027	30 / 66.0	256	x x.	x x.	x x.	x x.	x x x.	80	x
	Ø 2300 / 90.5"	H 80 / 3.1" B 40 / 1.6"	144	11.650	35 / 77.2	257	x x.	x x.	x x.	x x.	x x x.	80	x
	Ø 2600/102.3"	H 80 / 3.1" B 40 / 1.6"	164	13.272	40 / 88.0	258	x x.	x x.	x x.	x x.	x x x.	80	x
	Ø 3500/137.8"	H 80 / 3.1" B 40 / 1.6"	220	19.504	53 / 117.0	259	x x.	x x.	x x.	x x.	x x x.	80	x
	From H 140 we recommend a second LED row												
	Ø 1320 / 35.5"	H 140 / 5.5" B 40 / 1.6"	84	6.523	20 / 44.0	254	x x.	x x.	x x.	x x.	x x x.	140	x
LED 24V CRI > 80													
Dimming													



x x x.	x x.	x x.	x x.	x x.	x x x.	x x x.	x
--------	------	------	------	------	--------	--------	---

Complete order number



Handcrafted in Germany, certified quality



Conforms to UL-STD 1598
Certified to CSA-STD C22.2
No.250.0-08



Protective rating



Light distribution
direct / indirect



Protection class III:
only suitable for very low
voltage supply (<50V)




Luminaires are suitable for mounting on ordinary flammable materials, which have an inflammation point of at least 200° C. / 392° F.

CIRCOLO

I-Version

Housing: Circular aluminium profile, opal acrylic diffuser on the inside
Design: SATTLER, Patented

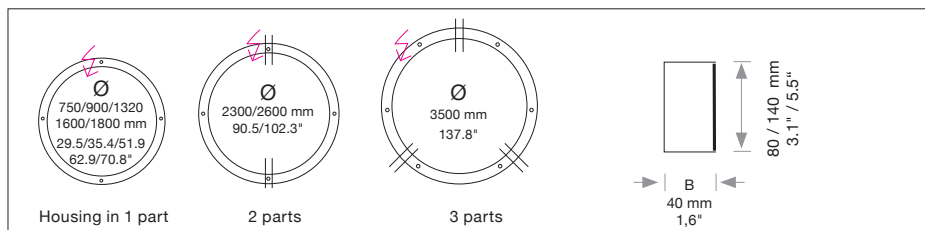

	Item No.	LED	Dimming	LED	Finishes	Power Supply cable	Total height	Mounting Version
Finishes (Standard) 11 white RAL 9010 (Optional) 10 black fine textured 22 aluminum polished 27 brush-finished aluminium 30 anthracite 32 crocodile black 33 sand silver fine textured 35 gold 36 brass 37 bronze fine textured 38 copper 44 wood veneer, white borders 45 Leder leather XX Custom finish								
Power Supply Cable (Standard) Z 70 Silver (Optional) Z 71 white Z 72 grey Z 73 black Z 74 orange Z 75 red Z 76 green Without Power supply cable 000 Mounting Version F,T,K,R								



X X X.	X X.	X X.	X X.	X X.	X X X.	X X X.	X
--------	------	------	------	------	--------	--------	---

Complete order number



Handcrafted in Germany, certified quality



Conforms to UL-STD 1598
Certified to CSA-STD C22.2
No.250.0-08



Protective rating



Light distribution direct / indirect



Protection class III: only suitable for very low voltage supply (<50V)





Luminaires are suitable for mounting on ordinary flammable materials, which have an inflammation point of at least 200° C. / 392° F.

CIRCOLO

I-Version

Housing: Circular aluminium profile, opal acrylic diffuser on the inside
Design: SATTLER, Patented

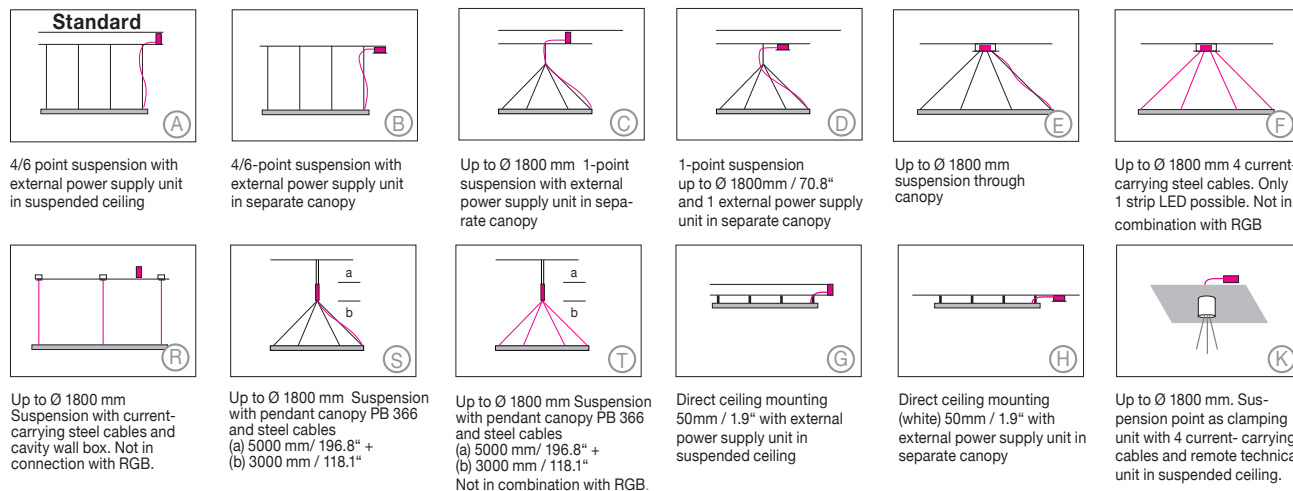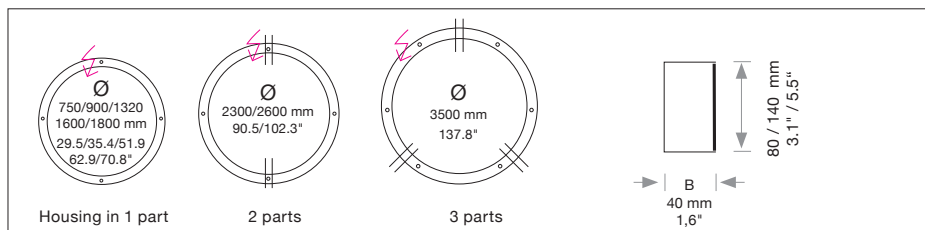

Mounting Version

A, B, C, D, G, H, R, K = Distance of external power supply unit to light fixture max. 10m / 394".

E, F = Minimum suspension height half the diameter of light fixture, maximum suspension height two times diameter of light fixture

Including steel cable suspension 5000mm/197"; Version F,R,T 3000mm/118";
Version S,T 5000 + 3000mm / 197"+118" and/or power supply cable 5000mm/197"

Item No.	LED	Dimming	LED	Finishes	Power Supply cable	Total height	Mounting Version
X X X.	X X.	X X.	X X.	X X.	X X X.	X X X.	X

Dimensions of external power supply units (1 LED Stripe)			
Type	Size mm / inch L W H	Size of lamp mm / inch.	For use with Mounting Version
DE 1F	360 x 150 x 85 14.2 x 5.9 x 3.3"	up to Ø 1800 / 62.9"	A, C, G, K, R
DE 2F	360 x 300 x 85 14.2 x 11.8 x 3.3"	up to size Ø 3500 / 137.8"	A, G

Input voltage for all external power supply units and canopy is **90-277 VAC 47-63 Hz**

Dimensions of canopy (1 LED Stripe)		
Type	Size mm / inch Ø cover plate / body	For use with Mounting Version
DB 290	Ø 290 / 260 mm / 11.4 x 10.2"	B, D, E, F, H
DB 350	Ø 350 / 320 mm / 13.7 x 12.5"	B, H
PB 366	Ø 90 H 366 mm / 3.5 x 14.4"	S, T
PB 656	Ø 90 H 656 mm / 3.5 x 25.8"	S, T

Canopy finish: white (11) contact factory for other finishes
USA/Canada: Canopy mounts to 4" octagonal junction box.

Complete order number

X X X.	X X.	X X.	X X.	X X.	X X X.	X X X.	X
--------	------	------	------	------	--------	--------	---

Optional



LED spot in canopy
4W/20°-40°, 400 Lumen (order separately)
Light fixture and spot are switchable and dimmable together only.


762. 67. 01. 04. 11. (white)



CASAMBI wall-switch

207. 00. 00. 00. 11 (white)
207. 00. 00. 00. 10 (black)

Casambi wall-switch is a wireless user interface that can be configured via the Casambi app. The four target buttons can control a scene or an animation of the user's choice or simply one luminaire, one luminaire group or all lights together if so desired. Up to 4 groups may be separately programmed. It comes with a wall mounting plate. The switch can be attached to the plate as it is equipped with magnets.



Ceiling fixation for mounting version A (if requested)

200. 00. 00. 00. 11 (white)

Ceiling opening for power supply cable. Consisting of cavity ceiling box with 80mm round metal cover. Powder coated in white, fine textured. Applicable to mounting version A.



Handcrafted in Germany, certified quality



Conforms to UL-STD 1598
Certified to CSA-STD C22.2
No.250.0-08



IP 20 Protective rating



Light distribution direct / indirect



Protection class III: only suitable for very low voltage supply (<50V)



Luminaires are suitable for mounting on ordinary flammable materials, which have an inflammation point of at least 200° C. / 392° F.