
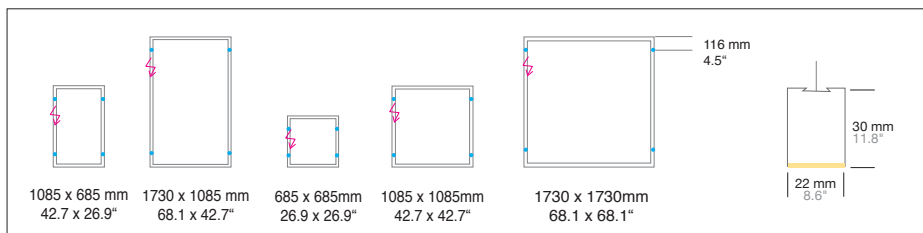





# SATTLER

## GIOCO DIRECT

Housing: Aluminium profile, integrated acrylic cover. Optional acoustic absorber.  
 Design: SATTLER, THEOPHIL EICHLER

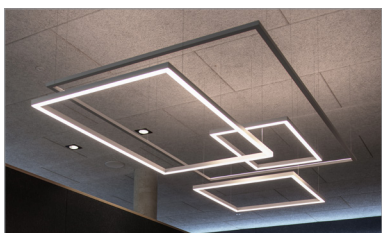



Size: L x W x H mm	inches	LED Watt	Lumen <sup>1)</sup>	weight kg <sup>2)</sup> / lbs <sup>2)</sup>	Item No.	LED	Dimming	LED	Finishes	Power Supply cable	Mounting Version
<b>Sizes</b>											
1085 x 685 x 30	42.7 x 26.9 x 11.8"	63	3.480	2,8 / 6.17	<b>1550.</b>	x x x.	x x x.	x x x.	x x x.	x x x.	x
1730 x 1085 x 30	68.1 x 42.7 x 11.8"	102	5.570	4,2 / 9.25	<b>1551.</b>	x x x.	x x x.	x x x.	x x x.	x x x.	x
685 x 685 x 30	26.9 x 26.9 x 11.8"	47	2.720	2,2 / 4.85	<b>1552.</b>	x x x.	x x x.	x x x.	x x x.	x x x.	x
1085 x 1085 x 30	42.7 x 42.7 x 11.8"	78	4.270	3,4 / 7.49	<b>1553.</b>	x x x.	x x x.	x x x.	x x x.	x x x.	x
1730 x 1730 x 30	68.1 x 68.1 x 11.8"	125	6.870	5,2 / 11.46	<b>1554.</b>	x x x.	x x x.	x x x.	x x x.	x x x.	x
<b>LED</b> 24V CRI > 90		<b>Warm-white</b> <b>Neutral-white</b> <b>Extra warm-white</b> <b>Tunable white*</b>	<b>3000 K</b> <b>4000 K</b> <b>2700 K</b> <b>2700 - 6500 K</b>	<b>(Standard)</b> <b>(Optional)</b> <b>(Optional)</b> <b>(Optional)</b>	x x x. x x x. x x x. x x x.	<b>30.</b> <b>40.</b> <b>27.</b> <b>80.</b>	x x x. x x x. x x x. x x x.	x x x. x x x. x x x. x x x.	x x x. x x x. x x x. x x x.	x x x. x x x. x x x. x x x.	x x x x
<b>Dimming</b>		<b>Without Dimmer</b> <b>DMX</b> <b>Dimmable 1 - 10 V</b> <b>Dimmable 0 - 10 V</b> <b>Dimmable DALI</b> <b>Dimmable CASAMBI</b> Bluetooth 4.0 remote control through app. <b>ENOCEAN</b> wireless push button	<b>(Standard)</b> <b>(Optional)</b> <b>(Optional)</b> <b>(Optional)</b> <b>(Optional)</b> <b>(Optional)</b>	x x x. x x x. x x x. x x x. x x x. x x x. x x x.	x x x. x x x. x x x. x x x. x x x. x x x.	<b>01.</b> <b>31.</b> <b>41.</b> <b>51.</b> <b>61.</b> <b>81.</b> <b>91.</b>	<b>00.</b> <b>00.</b> <b>00.</b> <b>00.</b> <b>00.</b> <b>00.</b> <b>00.</b>	x x x. x x x. x x x. x x x. x x x. x x x. x x x.	x x x. x x x. x x x. x x x. x x x. x x x. x x x.	x x x. x x x. x x x. x x x. x x x. x x x. x x x.	x x x x x x x
<b>Finishes</b>		<b>66</b> bronze anodised brushed <b>62</b> black anodised brushed <b>65</b> champ. gold anodised brushed <b>60</b> silver anodised brushed	(Standard) (Optional)	x x x. x x x. x x x. x x x.	x x x. x x x. x x x. x x x.	x x x. x x x. x x x. x x x.	x x x. x x x. x x x. x x x.	x x x. x x x. x x x. x x x.	x x x. x x x. x x x. x x x.	x x x. x x x. x x x. x x x.	x x x x
<b>Power Supply Cable</b> (Standard)		<b>000</b> without Mounting Version F/R <b>Z 78</b> Silver	(Optional)	x x x. x x x.	x x x. x x x.	x x x. x x x.	x x x. x x x.	x x x. x x x.	x x x. x x x.	x x x. x x x.	x x




Technical data is subject to change. Errors and omissions excepted 1) Net lumen output: Losses due to diffusers and reflectors are considered. Lumen values refer to an ambient temperature of max. 35° C / 95° F. 2) Weight of lights without remote technical unit or canopy.

## GIOCO DIRECT


Housing: Aluminium profile, integrated acrylic cover. Optional acoustic absorber.  
 Design: SATTLER, THEOPHIL EICHLER

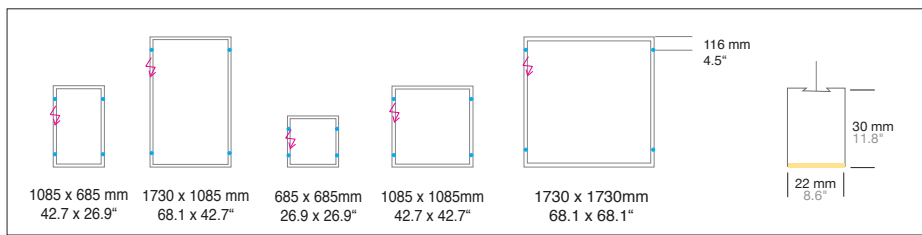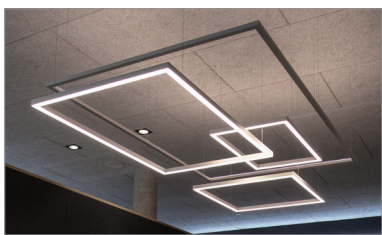


### Mounting Version




4-point suspension with external power supply unit in suspended ceiling




4-point suspension with external power supply unit in separate canopy




Suspension through canopy




4 current-carrying steel cables.



Direct ceiling mounting 50mm / 1.9" with external power supply unit in suspended ceiling



Direct ceiling mounting (white) 50mm / 1.9" with external power supply unit in separate canopy



Suspension with current-carrying steel cables and cavity wall box. B.

#### Dimensions of canopy

Typ Size mm / inch  
cover plate / body

For use with  
Mounting Version  
B, E, F, H

Item No.	LED	Dimming	LED	Finishes	Power Supply cable	Mounting Version
X X X.	X X.	X X.	X X.	X X.	X X X	.

A, B, G, H, R = Distance of external power supply unit to light fixture max. 10m / 394".

E, F = Minimum suspension height, half of the longest side

Including steel cable suspension 3000mm/118".

X X X.	X X.	X X.	X X.	X X.	X X X	X
--------	------	------	------	------	-------	---

Complete order number

**Dimensions of external power supply units**

Typ	Size mm / inch	For use with Mounting Version
DE 1F	360 x 150 x 85 mm 14.2 x 5.9 x 3.3"	A, G, R

Input voltage for all external power supply units and canopy is **90-277 VAC 47-63 Hz**

**Dimensions of canopy**

Typ	Size mm / inch	For use with Mounting Version
DB 230	Ø 230 x 210 x 60 mm / 9.5 x 8.3 x 2.3" size 685 x 685 mm	B, E, F, H
DB 290	Ø 290 / 260 / 60 mm / 11.4 x 10.2 x 2.3"	

### Optional




#### CASAMBI wall-switch

207. 00. 00. 00. 11 (white)

207. 00. 00. 00. 10 (black)

Casambi wall-switch is a wireless user interface that can be configured via the Casambi app. The four target buttons can control a scene or an animation of the user's choice or simply one luminaire, one luminaire group or all lights together if so desired. Up to 4 groups may be separately programmed. It comes with a wall mounting plate. The switch can be attached to the plate as it is equipped with magnets.



#### Ceiling fixation for mounting version A, G (if requested)

200. 00. 00. 00. 11 (white)

Ceiling opening for power supply cable. Consisting of a cavity ceiling box with 80mm round metal cover. Powder coated in white, fine textured. Applicable to mounting version A, G.



#### ACOUSTIC-SET

Acoustic Absorber mit hochwirksamer Schallabsorption  $\alpha = 0,9$ , hell- oder dunkelgrau, inkl. Befestigungsklammern, lässt sich auch nachträglich an vorhandener Leuchte ergänzen.

1085 x 685 mm

1730 x 1085 mm

685 x 685 mm

1085 x 1085 mm

301. 00. 00. 00. 90 (light grey) 91 (dark grey)

302. 00. 00. 00. 90 (light grey) 91 (dark grey)

303. 00. 00. 00. 90 (light grey) 91 (dark grey)

304. 00. 00. 00. 90 (light grey) 91 (dark grey)

