
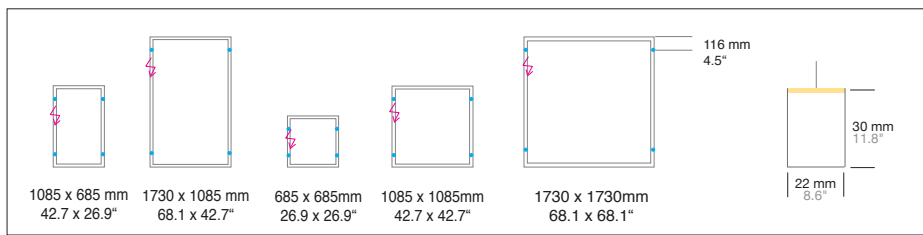




SATTLER

GIOCO INDIRECT

Housing: Aluminium profile, integrated acrylic cover.
 Design: SATTLER, THEOPHIL EICHLER

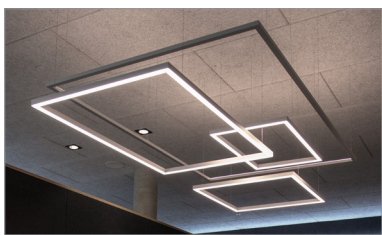



Size: L x W x H mm	inches	LED Watt	Lumen ¹⁾	weight kg ²⁾ / lbs ²⁾	Item No.	LED	Dimming	LED	Finishes	Power Supply cable	Mounting Version
Sizes											
1085 x 685 x 30	42.7 x 26.9 x 11.8"	63	3.480	2,8 / 6.17	1560.	x x x.	x x x.	x x x.	x x x.	x x x.	x
1730 x 1085 x 30	68.1 x 42.7 x 11.8"	102	5.570	4,2 / 9.25	1561.	x x x.	x x x.	x x x.	x x x.	x x x.	x
685 x 685 x 30	26.9 x 26.9 x 11.8"	47	2.720	2,2 / 4.85	1562.	x x x.	x x x.	x x x.	x x x.	x x x.	x
1085 x 1085 x 30	42.7 x 42.7 x 11.8"	78	4.270	3,4 / 7.49	1563.	x x x.	x x x.	x x x.	x x x.	x x x.	x
1730 x 1730 x 30	68.1 x 68.1 x 11.8"	125	6.870	5,2 / 11.46	1564.	x x x.	x x x.	x x x.	x x x.	x x x.	x
LED 24V CRI > 90		Warm-white Neutral-white Extra warm-white Tunable white*	3000 K 4000 K 2700 K 2700 - 6500 K	(Standard) (Optional) (Optional) (Optional)	x x x. x x x. x x x. x x x.	30. 40. 27. 80.	x x x. x x x. x x x. x x x.	x x x. x x x. x x x. x x x.	x x x. x x x. x x x. x x x.	x x x. x x x. x x x. x x x.	x x x x
Dimming		Without Dimmer DMX Dimmable 1 - 10 V Dimmable 0 - 10 V Dimmable DALI Dimmable CASAMBI Bluetooth 4.0 remote control through app. ENOCEAN wireless push button	(Standard) (Optional) (Optional) (Optional) (Optional) (Optional)	x x x. x x x. x x x. x x x. x x x. x x x. x x x.	x x x. x x x. x x x. x x x. x x x. x x x.	01. 31. 41. 51. 61. 81. 91.	00. 00. 00. 00. 00. 00. 00.	x x x. x x x. x x x. x x x. x x x. x x x. x x x.	x x x. x x x. x x x. x x x. x x x. x x x. x x x.	x x x. x x x. x x x. x x x. x x x. x x x. x x x.	x x x x x x x
Finishes		66 bronze anodised brushed 62 black anodised brushed 65 champ. gold anodised brushed 60 silver anodised brushed	(Optional)	x x x. x x x. x x x. x x x.	x x x. x x x. x x x. x x x.	x x x. x x x. x x x. x x x.	x x x. x x x. x x x. x x x.	x x x. x x x. x x x. x x x.	x x x. x x x. x x x. x x x.	x x x. x x x. x x x. x x x.	x x x x
Power Supply Cable (Standard)		000 without Mounting Version F/R Z 78 Silver	(Optional)	x x x. x x x.	x x x. x x x.	x x x. x x x.	x x x. x x x.	x x x. x x x.	x x x. x x x.	x x x. x x x.	x x




Technical data is subject to change. Errors and omissions excepted 1) Net lumen output: Losses due to diffusers and reflectors are considered. Lumen values refer to an ambient temperature of max. 35° C / 95° F. 2) Weight of lights without remote technical unit or canopy.

GIOCO INDIRECT


Housing: Aluminium profile, integrated acrylic cover. Optional acoustic absorber.
 Design: SATTLER, THEOPHIL EICHLER

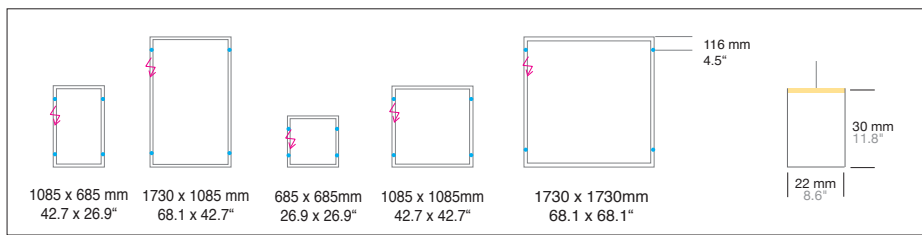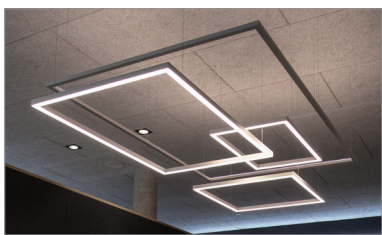


Mounting Version




4-point suspension with external power supply unit in suspended ceiling




4-point suspension with external power supply unit in separate canopy



Suspension through canopy



4 current-carrying steel cables.



Suspension with current-carrying steel cables and cavity wall box. B.

Item No.	LED	Dimming	LED	Finishes	Power Supply cable	Mounting Version
X X X.	X X.	X X.	X X.	X X.	X X X	.

A, B, R = Distance of external power supply unit to light fixture max. 10m / 39'4".

E, F = Minimum suspension height, half of the longest side

Including steel cable suspension 3000mm/118".

X X X.	X X.	X X.	X X.	X X.	X X X	X
--------	------	------	------	------	-------	---

Complete order number

Dimensions of external power supply units

Typ	Size mm / inch	For use with Mounting Version
DE 1F	360 x 150 x 85 mm 14.2 x 5.9 x 3.3"	A, R

Input voltage for all external power supply units and canopy is **90-277 VAC 47-63 Hz**

Dimensions of canopy

Typ	Size mm / inch	For use with Mounting Version
DB 230	Ø 230 x 210 x 60 mm / 9.5 x 8.3 x 2.3" size 685 x 685 mm	B, E, F, H
DB 290	Ø 290 x 260 / 60 mm / 11.4 x 10.2 x 2.3"	

Optional




CASAMBI wall-switch

207. 00. 00. 00. 11 (white)

207. 00. 00. 00. 10 (black)

Casambi wall-switch is a wireless user interface that can be configured via the Casambi app. The four target buttons can control a scene or an animation of the user's choice or simply one luminaire, one luminaire group or all lights together if so desired. Up to 4 groups may be separately programmed. It comes with a wall mounting plate. The switch can be attached to the plate as it is equipped with magnets.



Ceiling fixation for mounting version A (if requested)

200. 00. 00. 00. 11 (white)

Ceiling opening for power supply cable. Consisting of a cavity ceiling box with 80mm round metal cover. Powder coated in white, fine textured. Applicable to mounting version A, G.



Handcrafted in Germany, certified quality



B, E, F
A, R



IP 20 Protective rating



Light distribution indirect



Protection class III: only suitable for very low voltage supply (<50V)



Luminaires are suitable for mounting on ordinary flammable materials, which have an inflammation point of at least 200° C. / 392° F.