


SATTLER

OCULI

Housing: Circular aluminium profile with integrated cover on the inside and live track on top for flexible positioning of spots

Design: SATTLER

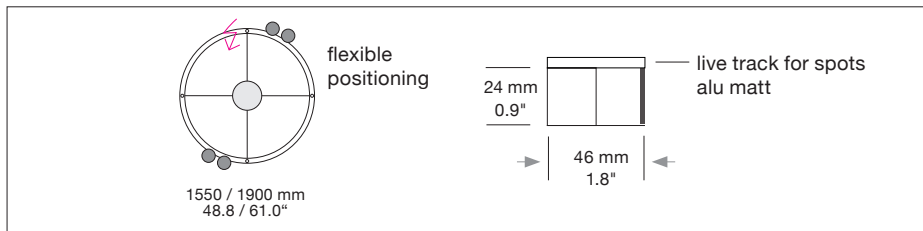

Sizes	Size: Ø mm	inches	LED Watt	Lumen ¹⁾	weight kg ²⁾ / lbs ²⁾	Item No.	LED	Dimming	Finishes	Power Supply cable	Mounting Version
	Ø 1550 mm	61.0"	88	5.156	12.0 / 26.4	955.	x x .	x x .	x x .	x x x .	x
	Ø 1900 mm	74.8"	108	6.305	13.0 / 28.6	956.	x x .	x x .	x x .	x x x .	x

LED 24V CRI > 90 *CRI > 80		Warm-white	3000 K	(Standard)	x x x .	63.	x x .	x x .	x x .	x x x .	x
		Neutral-white	4000 K	(Optional)	x x x .	69.	x x .	x x .	x x .	x x x .	x
		Extra warm-white	2700 K	(Optional)	x x x .	61.	x x .	x x .	x x .	x x x .	x
		Extra warm-white	2200 K*	(Optional)	x x x .	22.	x x .	x x .	x x .	x x x .	x

Dimming 	Without Dimmer	(Standard)	x x x .	x x .	01.	00.	x x .	x x x .	x
	DMX	(Optional)	x x x .	x x .	31.	00.	x x .	x x x .	x
	Dimmable 1 - 10 V	(Optional)	x x x .	x x .	41.	00.	x x .	x x x .	x
	Dimmable 0 - 10 V	(Optional)	x x x .	x x .	51.	00.	x x .	x x x .	x
	Dimmable DALI	(Optional)	x x x .	x x .	61.	00.	x x .	x x x .	x
	Dimmable CASAMBI	(Optional)	x x x .	x x .	81.	00.	x x .	x x x .	x
	Bluetooth 4.0 remote control through app. ENOCEAN wireless push button*	(Optional)	x x x .	x x .	91.	x x .	x x .	x x x .	x

Finishes (Standard)	 11 white Live track alu matt		x x x .	x x .	x x .	x x .	11.	x x x .	x
-------------------------------	---	--	---------	-------	-------	-------	------------	---------	---

Power Supply Cable (Standard)	 Z 70 Silver	 Z 71 white	 Z 72 grey	 Z 73 black								
	 Z 74 orange	 Z 75 red	 Z 76 green			x x x .	x x .	x x .	x x .	x x .		x



Handcrafted in Germany, certified quality



Conforms to UL-STD 1598 Certified to CSA-STD C22.2 No.250.0-08



IP 20 Protective rating



Light distribution direct



Protection class III: only suitable for very low voltage supply (<50V)



Luminaires are suitable for mounting on ordinary flammable materials, which have an inflammation point of at least 200° C. / 392° F.


Technical data is subject to change. Errors and omissions excepted 1) Net lumen output: Losses due to diffusors and reflectors are considered. Lumen values refer to an ambient temperature of max. 35° Celsius / 95° Fahrenheit. 2) Weight of lights without remote technical unit or canopy.

SATTLER


OCULI

Housing: Circular aluminium profile with integrated cover on the inside and live track on top for flexible positioning of spots


Design: SATTLER

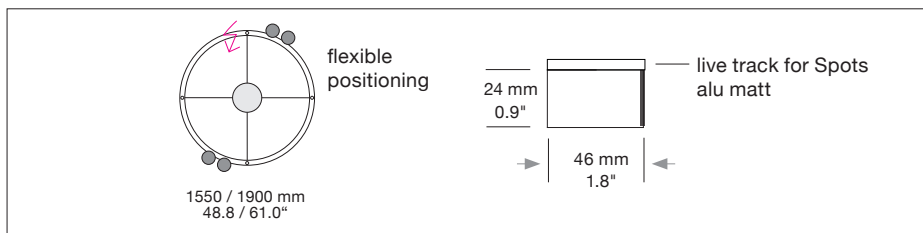


Mounting Version



4 point suspension, with external power supply unit in suspended ceiling



4 point suspension, with external power supply unit in separate canopy



suspension through canopy

Item No.	LED	Dimming	LED	Finishes	Power Supply cable	Mounting Version
X X X.	X X.	X X.	X X.	X X.	X X X	.

A, B = Distance of external power supply unit to light fixture max. 10m / 394".

E = Minimum suspension height half the diameter of light fixture, maximum suspension height two times diameter of light fixture

Including steel cable suspension 5000mm/197" and/or power supply cable 5000mm/197"

X X X.	X X.	X X.	X X.	X X.	X X X	X
--------	------	------	------	------	-------	---

Complete order number

Dimensions of external power supply units

Typ	Size mm / inch	For use with
	L W H	Mounting Version
DE 2F	360 x 300 x 85 mm / 14.2 x 11.8 x 3.3"	A

Dimensions of canopy

Typ	Size mm / inch	For use with
	Ø cover plate / body	Mounting Version
DB 350	Ø 350 / 320 mm / 13.7 x 12.5"	E, B

Canopy finish: white (11) contact factory for other finishes

USA/Canada: Canopy mounts to 4" octagonal junction box.


Input voltage for all external power supply units and canopy is **90-277 VAC 47-63 Hz**

Optional



max. 4 Spots possible

LED SPOT CRI 95
12 V, 12,5 W, for live track, maximum wattage per light 110W. Light colour matches light fixture. Beam angle 9°, 25°, 36°, 60°. Light fixture and spots (only together) separately switchable. Spots are not dimmable.




LED Spotlight	white	black	alu
Max 9°	960.68.01.18.	11.	10.
Max 25°	961.68.01.18.	11.	10.
Max 36°	962.68.01.18.	11.	10.
Max 60°	963.68.01.18.	11.	10.



CASAMBI wall-switch

Casambi wall-switch is a wireless user interface that can be configured via the Casambi app. The four target buttons can control a scene or an animation of the user's choice or simply one luminaire, one luminaire group or all lights together if so desired. Up to 4 groups may be separately programmed. It comes with a wall mounting plate. The switch can be attached to the plate as it is equipped with magnets.

207. 00. 00. 00. 11 (white)
207. 00. 00. 00. 10 (black)



Ceiling fixation for power supply cable

Consisting of a cavity ceiling box with 80mm round metal cover. Applicable to mounting version A.


200. 00. 00. 00. 11 (white)



Handcrafted in Germany, certified quality



Conforms to UL-STD 1598 Certified to CSA-STD C22.2 No.250.0-08



Luminaires are suitable for mounting on ordinary flammable materials, which have an inflammation point of at least 200° C / 392° F.

Technical data is subject to change. Errors and omissions excepted 1) Net lumen output: Losses due to diffusors and reflectors are considered. Lumen values refer to an ambient temperature of max. 35° Celsius / 95° Fahrenheit. 2) Weight of lights without remote technical unit or canopy.