














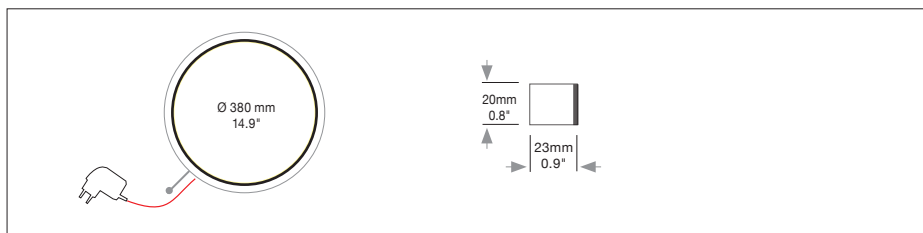



SATTLER


SLIM TABLE

Housing: Aluminium profile with acrylic cover on the inside
Design: MARKUS BISCHOF



Size: Ø mm	inches	LED Watt	Lumen ¹⁾	weight kg ²⁾ / lbs ²⁾	Item No.	LED	Dimming	Finishes	Power Supply cable	Mounting Version										
Sizes	Ø 380 mm	14.9"	14	897	1.0 / 2.2	737.	x x.	x x. x x.	x x.	x x x.										
LED 24V CRI > 90 *CRI > 80		Warm-white Neutral-white Extra warm-white	3000 K (Standard) 4000 K (Optional) 2700 K (Optional) 2200 K* (Optional)	x x x. x x x. x x x. x x x.	63. 69. 61. 22.	x x. x x. x x. x x.	x x. x x. x x. x x.	x x. x x. x x. x x.	x x x. x x x. x x x. x x x.											
Dimming		Touchdimmer	(Standard)	x x x.	x x.	44. 00.	x x.	x x.	x x x.											
Finishes	 11 white (Standard)	(Optional)	 22 aluminium polished	 27 brush-finished aluminium	 30 anthracite	 32 crocodile black	 33 sand silver fine textured	 35 gold	 36 brass	 37 bronze fine textured	 38 copper	 10 black fine textured	 XX Custom finish	x x x.	x x.	x x.	x x.	. .	x x x.	
Power Supply Cable	 Z 91 (Standard)	(Optional)	 Z 90	x x x.	x x.	x x.	x x.	x x.	x x x.											
	PVC cable white 1900mm/74" for finish 11 white		PVC cable black 1900mm/74" for all optional finishes																	

Mounting Version



included country-specific plug



Table lamp including 1900mm/74" connection cable (black) with power adapter

Input voltage for all external power supply units and canopy is **90-277 VAC 47-63 Hz**



737.	x x.	44. 00.	x x.	x x x.	L
-------------	-------------	----------------	-------------	---------------	----------

Complete order number



Handcrafted in Germany, certified quality



Conforms to UL-STD 1598 Certified to CSA-STD C22.2 No.250.0-08



IP 20 Protective rating



Light distribution direct



Protection class III: only suitable for very low voltage supply (<50V)



Luminaires are suitable for mounting on ordinary flammable materials, which have an inflammation point of at least 200° C / 392° F.