









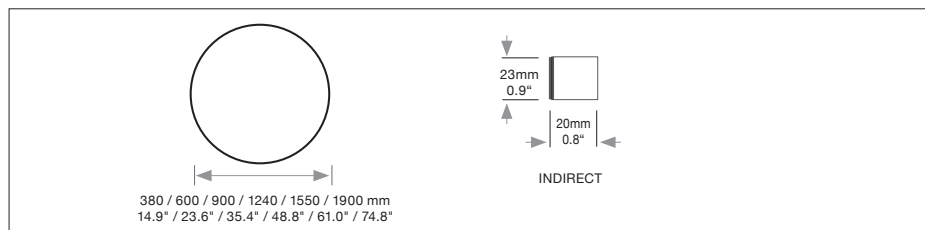

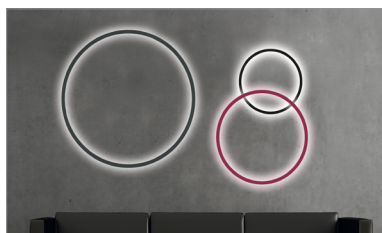







SATTLER

SLIM WALL

Housing: Wall lamp with indirect light distribution.
Circular aluminium profile with integrated acrylic glass.

Design: SATTLER





	Size: Ø mm	inches	LED Watt	Lumen ¹⁾	weight kg ²⁾ / lbs ²⁾	Item No.	LED	Dimming	LED	Finishes	Power Supply cable	Mounting Version	
Sizes	Ø 380 mm	14.9“	9	456	1.0 / 2.2	727.	x x.	x x.	x x.	x x.	x x x.	x x	
	Ø 600 mm	23.6“	14	789	1.0 / 2.2	728.	x x.	x x.	x x.	x x.	x x x.	x x	
	Ø 900 mm	35.4“	23	1.149	1.5 / 3.3	729.	x x.	x x.	x x.	x x.	x x x.	x x	
	Ø 1240 mm	48.8“	30	1.347	2.5 / 5.5	730.	x x.	x x.	x x.	x x.	x x x.	x x	
	Ø 1550 mm	61.0“	39	1.905	3.0 / 6.6	731.	x x.	x x.	x x.	x x.	x x x.	x x	
	Ø 1900 mm	74.8“	46	2.289	3.5 / 7.7	732.	x x.	x x.	x x.	x x.	x x x.	x x	
LED 24V CRI > 90 *CRI > 80		Warm-white		3000 K	(Standard)	x x x.	63.	x x.	x x.	x x.	x x x.	x x	
		Neutral-white		4000 K	(Optional)	x x x.	69.	x x.	x x.	x x.	x x x.	x x	
		Extra warm-white		2700 K	(Optional)	x x x.	61.	x x.	x x.	x x.	x x x.	x x	
		Extra warm-white		2200 K*	(Optional)	x x x.	22.	x x.	x x.	x x.	x x x.	x x	
Dimming	  Dimming only in combination with mounting version „W“	Without Dimmer		(Standard)	x x x.	x x.	01.	00.	x x.	x x x.	x L		
		DMX		(Optional)	x x x.	x x.	31.	00.	x x.	x x x.	x W		
		Dimmable 1 - 10 V		(Optional)	x x x.	x x.	41.	00.	x x.	x x x.	x W		
		Dimmable 0 - 10 V		(Optional)	x x x.	x x.	51.	00.	x x.	x x x.	x W		
		Dimmable DALI		(Optional)	x x x.	x x.	61.	00.	x x.	x x x.	x W		
		Dimmable CASAMBI		(Optional)	x x x.	x x.	81.	00.	x x.	x x x.	x W		
		Bluetooth 4.0 remote control through app.											
ENOCEAN wireless push button		(Optional)	x x x.	x x.	91.	00.	x x.	x x x.	x W				
Finishes	 (Standard) 11 white (Optional)												
		22 aluminium polished	27 brush-finished aluminium	30 anthracite	32 crocodile black	33 sand silver fine textured							
													
		35 gold	36 brass	37 bronze fine textured	38 copper	10 black fine textured							
													
		XX Custom finish					x x x.	x x.	x x.	x x.	. .	x x x.	x x
Power Supply Cable (Standard)		Mounting L				x x x.	x x.	x x.	x x.	x x.	Z90.	x x	

SATTLER





SLIM WALL

Housing: Wall lamp with indirect light distribution.
Circular aluminium profile with integrated acrylic glass.

Design: SATTLER

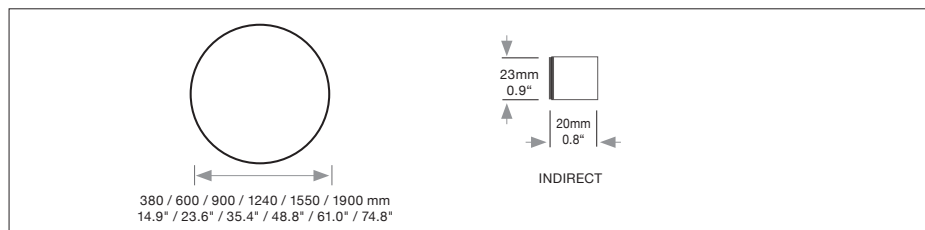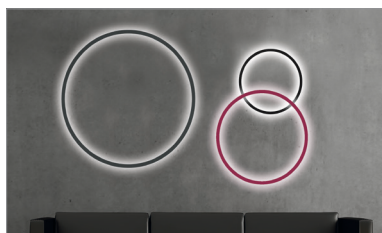

Mounting Version


Mounting Version	Item No.	LED	Dimming	Finishes	Power Supply cable	Mounting Version
 Ⓚ Wall bracket 85 mm / 3.3" (white)	(Standard)	x x x.	x x.	x x. x x.	x x x.	K x
 ⓐ Wall bracket 115 mm / 4.5" (white)	(Optional)	x x x.	x x.	x x. x x.	x x x.	J x
Ⓛ pluggable on the lamp cord included country-specific plug 	(Standard)	x x x.	x x.	x x. x x.	x x x.	x L
Ⓜ Remote power supply for intermediate wall 	(Optional)	x x x.	x x.	x x. x x.	x x x.	x W

Wall brackets in white. Upon request in aluminium polished.

W = Distance of external power supply unit to light fixture max. 4m / 157".

x x x.	x x.	x x. x x.	x x.	Z90	x x
--------	------	-----------	------	------------	-----

Complete order number

Dimensions of external power supply units				
Typ	Size mm / inch			For use with
	L	W	H	Mounting Version
	DE 1F	360 x 150 x	85 mm / 14.2 x	5.9 x 3.3" W

Input voltage for all external power supply units and canopy is **90-277 VAC 47-63 Hz**

Optional



CASAMBI wall-switch

white
black

207. 00. 00. 00. 11
207. 00. 00. 00. 10

Casambi wall-switch is a wireless user interface that can be configured via the Casambi app. The four target buttons can control a scene or an animation of the user's choice or simply one luminaire, one luminaire group or all lights together if so desired. Up to 4 groups may be separately programmed. It comes with a wall mounting plate. The switch can be attached to the plate as it is equipped with magnets.



Handcrafted in Germany, certified quality



Conforms to UL-STD 1598
Certified to CSA-STD C22.2
No.250.0-08

IP 20 Protective rating



Light distribution indirect



Protection class III:
only suitable for very low voltage supply (<50V)



Luminaires are suitable for mounting on ordinary flammable materials, which have an inflammation point of at least 200° C. / 392° F.

www.sattler-lighting.com

Technical data is subject to change. Errors and omissions excepted 1) Net lumen output: Losses due to diffusors and reflectors are considered. Lumen values refer to an ambient temperature of max. 35° Celsius / 95° Fahrenheit. 2) Weight of lights without remote technical unit or canopy.