


SATTLER

UNIONE

Housing: Pendant light with direct light distribution, 6 parts aluminium profile, with integrated acrylic cover

Design: MARKUS BISCHOF

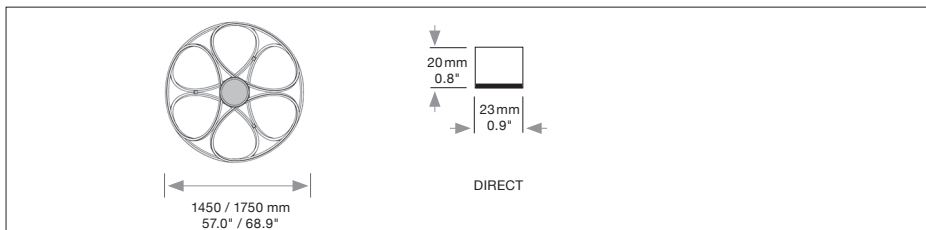

Size	LED	Dimming	LED	Finishes	Power Supply Cable	Mounting Version				
Size: Ø mm	LED Watt	Lumen ¹⁾	weight kg ²⁾ / lbs ²⁾	Item No.	LED	Dimming	LED	Finishes	Power Supply Cable	Mounting Version
Ø 1450 mm	330	15.444	32.0 / 70.5	768.	x x.	x x.	x x.	x x.	x x x.	x
Ø 1750 mm	432	19.776	36.0 / 79.3	769.	x x.	x x.	x x.	x x.	x x x.	x
LED										
24V CRI > 90 CRI > 80*										

Dimming	Without Dimmer	DMX	Dimmable 1 - 10 V	Dimmable 0 - 10 V	Dimmable DALI	Dimmable CASAMBI	Bluetooth 4.0 remote control through app.	ENOCEAN wireless push button
Without Dimmer	(Standard)	(Optional)	(Optional)	(Optional)	(Optional)	(Optional)	(Optional)	(Optional)
DMX	x x x.	x x.	01. 00.	x x.	x x.	x x.	x x x.	x x.
Dimmable 1 - 10 V	x x x.	x x.	31. 00.	x x.	x x.	x x.	x x x.	x x.
Dimmable 0 - 10 V	x x x.	x x.	41. 00.	x x.	x x.	x x.	x x x.	x x.
Dimmable DALI	x x x.	x x.	51. 00.	x x.	x x.	x x.	x x x.	x x.
Dimmable CASAMBI	x x x.	x x.	61. 00.	x x.	x x.	x x.	x x x.	x x.
Bluetooth 4.0 remote control through app.	x x x.	x x.	81. 00.	x x.	x x.	x x.	x x x.	x x.
ENOCEAN wireless push button	x x x.	x x.	91. 00.	x x.	x x.	x x.	x x x.	x x.

Finishes	11 white	22 aluminium polished	27 brush-finished aluminium	30 anthracite	32 crocodile black	33 sand silver fine textured	35 gold	36 brass	37 bronze fine textured	38 copper	10 black fine textured	XX Custom finish
(Standard)	11 white	(Optional)	22 aluminium polished	27 brush-finished aluminium	30 anthracite	32 crocodile black	33 sand silver fine textured					
(Optional)												

Power Supply Cable	Z 70 Silver
(Standard)	Z 70 Silver

Mounting Version	1 suspension through canopy with technical unit in suspended ceiling
(Standard)	1 suspension through canopy with technical unit in suspended ceiling

Mounting version with steel cable length 5 m / 197" and power supply cable, length 10 m / 394"

x x x.	x x.	x x.	x x.	x x.	Z70.	I
--------	------	------	------	------	-------------	----------

Complete order number

Dimensions of external power supply units			
Typ	Size mm / inch	For use with Mounting Version	
DE 3F	360 x 400 x 85 mm / 14.2 x 15.7 x 3.3"	I	
USA/Canada: Canopy mounts to 4" octagonal junction box.			

Dimensions of canopy		
Typ	Size mm / inch	For use with Mounting Version
DB 230S	Ø 230 / 210mm / 9.0 x 8.3"	I
Base finish white (11), Cover white (11)		
If finish (22), Cover aluminium polished (22)		

Input voltage for all external power supply units and canopy is **90-277 VAC 47-63 Hz**



Handcrafted in Germany, certified quality



Conforms to UL-STD 1598 Certified to CSA-STD C22.2 No.250.0-08



IP 20 Protective rating



Light distribution direct



Protection class III: only suitable for very low voltage supply (<50V)



Luminaires are suitable for mounting on ordinary flammable materials, which have an inflammation point of at least 200° C. / 392° F.