

Item

T11H147-9016C2HCLX7L
skai pendant luminaire di/id white RAL9016

General

LED HCL 2700 - 6500K 58W 6123lm

Illuminant

LED HCL
EEI A+
Colour rendering index (CRI) > 80
Blue light hazard RG0 IEC 62471
MacAdam 3
UGR < 16

Dimension

LxWxH: 1471x331x046mm

Surface/Colour

Material: Aluminium
Surface/Colour RAL9016 white fine matte finish

Lens

Lens technology
Diffuser PC satined (id)

Protection rating



IP20 / Protection class I

Connection

230V 50/60Hz
incl. converter for light control with sensors
2 suspension cables 2000mm with quick release /
3-pin connection-terminal with surface-mount
housing in white (100x100x31 mm) as a Stand-alone
solution

Weight

9,0 kg

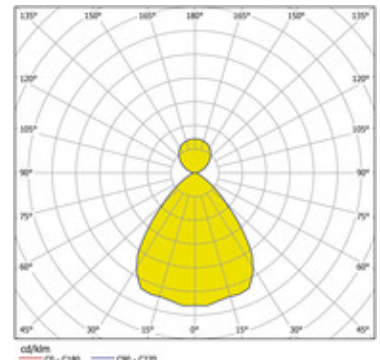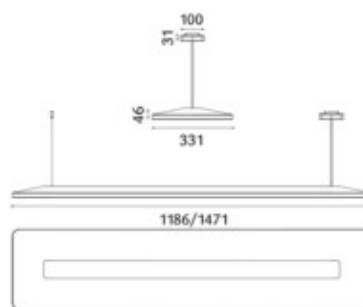

Product-Information

Super slim high-class pendant luminaire for office application designed for direct and indirect light emission, in special conical housing design with rounded corners and a visual height of 18 mm constructed out of an extruded aluminium section without screws(1 to adjust), with a fine structure powder coating in matte white 'RAL9016', a black decorative frame is here an option. This innovative luminaire is developed with a unique lens-technology for reduced brightness (LRA), an Unified Glare Rating (UGR) smaller than 16, a high efficiency of 105 lm per W and produces a luminous flux of minimum 6123 lm with 58 W, colour temperature in tunable white of 2700 - 6500 K. Dimmable DALI converter with a daylight and motion sensor and 3-pin connection-terminal with surface-mount housing in white (100x100x31 mm) as a Stand-alone solution. Power supply cable in stylish solution, Colour Rendering Index (CRI) > 80, small Colour Tolerance MacAdam 3, Blue light hazard Risk Group RG0 IEC 62471, Rated lifetime of minimum 50.000 h [according to EU decree No. 1194/2012], Energy Efficiency Index (EEI) A+. Ingress Protection IP20, Protection Class I. LxWxH: 1471x331x046 mm. Weight: 9,0 kg