

## PANTHEON 600

1T4052

LIGHT SOURCE **LED** COLOUR TEMPERATURE **3000K** POWER (SOURCE) **18W** CRI **80** BEAM ANGLE **VWFL**  
 EMISSION **DIRECT** COLOUR AND FINISH **WHITE** VERSION **SUSPENSION** SIZE **DxH=600x120mm**  
 POWER SUPPLY **220-240Vac 50/60Hz** INSULATION CLASS **CLASS 2** GLOBAL IP OR HOUSING **IP20** F CLASS **YES**



### CONCEPT

Direct or diffused LED light suspension and ceiling mounted fixture.

### MATERIALS

Body in matt white shockproof PE obtained from rotational moulding. UV protection. 100% recyclable and solution-dyed. Integrated heat dissipator in matt white aluminium.

### SOURCE

Dimmable LED module 230V Ra80.

### INSTALLATION


Suspension: complete with suspension cable and transparent feeding cable L. 2000mm. Ceiling mounted: complete with a fixing plate to mount it to the ceiling.

### POWER SUPPLY

Driver not required. 220-240Vac 50/60Hz

### NOTES

Casambi control system available by using a dedicated accessory (230Vac LED module max 150W).

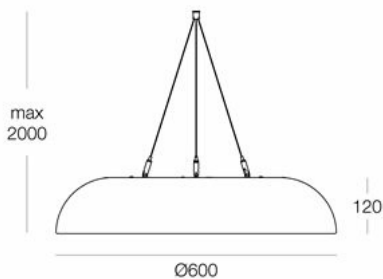

All the measures are expressed in mm

## Photometries

3000K Ra80		H(m)	D(m)	E <sub>max</sub> (lx)
Fixture Power	18W		98°	
Source Flux	1148lm	1	2.28	552
Fixture Flux	1148lm	2	4.56	138
Efficacy	64lm/W	3	6.84	61
		4	9.12	34
		5	11.41	22
TS810	I <sub>max</sub> =480cd/klm			
	I <sub>max</sub>			552cd

---

## Accessory Codes

### Installation



**1T3978**

---

**Canopy**

Plaster White canopy.

### Control Systems



**1T5351**

---

**Control System**

A Wireless Trailing Edge / IGBT dimmer managed using Bluetooth 4.0 technology. It works with LED 230 V-AC modules, dimmable LED sources and halogen lamps. It can be installed inside a standard 503 wall switch box, lighting fixtures or ceiling canopies. It can manage systems with a maximum absorption of 150W. The module is wireless controlled using a CASAMBI app for smartphones and tablets or traditional wall switches. IP20