

## FEBO EVO

1E3191EL

LIGHT SOURCE **LED** COLOUR TEMPERATURE **4000K** POWER (SOURCE) **34W** CRI **84** BEAM ANGLE **WFL**  
 COLOUR AND FINISH **FERRITE** POWER SUPPLY **220-240Vac 50/60Hz** DRIVER **ELECTRONIC** DRIVER INCLUDED **YES**  
 INSULATION CLASS **CLASS 2** GLOBAL IP OR HOUSING **IP67** F CLASS **YES**



### CONCEPT

Inground or wall LED fixture with grazing lighting effect.

### MATERIALS

Extruded aluminium body, die-cast aluminium optical head with black radial blades.

### SOURCE


Multiple sources circuit, mid-power LED with flip-chip technology, Ra>80.

### OPTIC

Optical unit composed of a collimating toroidal lens in transparent, optical grade PMMA.

### POWER SUPPLY

Available in electronic or DALI power supply inserted into the fixture. Includes a watertight connection system inside the fixture. Casambi control system available as an accessory (only for DALI versions). 220-240Vac 50/60Hz

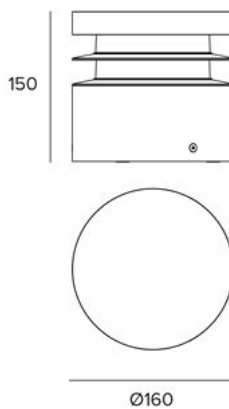

All the measures are expressed in mm


## Photometries

	<b>4000K Ra84</b>	
	Fixture Power	38W
	Source Flux	4862lm
	Fixture Flux	2625lm
	Efficacy	69lm/W
	Imax	1393cd
TS1071	Imax=286cd/klm	

---

## Accessory Codes

### Optical



**1E3399**

---

#### Shutter

120° shutter kit (with 4 cut zones that allow to shutter even 105°/90°/75°/60° angles). Max. no. of kits per product: 2.