



SABA PL 40

TECHNICAL DATA:



CERTIFICATIONS:

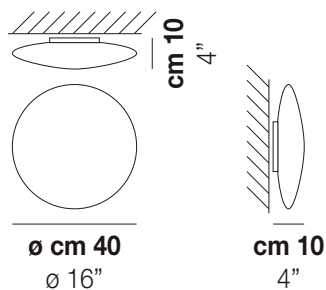

LIGHT SOURCES


LED Source	Power	Voltage	Frequency	Beam Angle	Light Output
	1x77W	220-240 V	50/60 Hz	E27	Led 2700 K 19 W 39 V 2850 lm DIM2 Phase Cut
LED 2700K DIM2	1x19 W	39 V			Led 3000 K 19 W 39 V 2850 lm DIM2 Phase Cut
LED 3000K DIM2	1x19 W	39 V			Led 3000 K 19 W 39 V 2850 lm DIM3 0-10V, Push
LED 3000K DIM3	1x19 W	39 V			

VOLUME	Mc 0,05
GROSS WEIGHT	Kg 4
NET WEIGHT	Kg 3,5

download



SHADE FINISHING



BCST


FRAME FINISHING



BC

OTHER VERSION AVAILABLE

Click on the version to go to the web version of the product

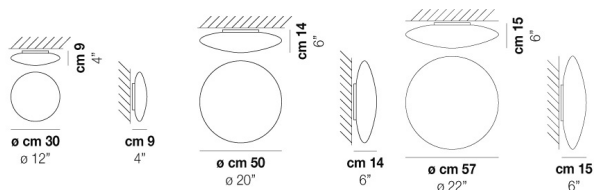

SABA PP 30

SABA PP 50

SABA PP 60