

XGR1206 - XGR1206 LED-EM

Lighting fixture for ceiling built-in installation for interiors, with direct light emission.

Total built-in plaster structure for permanent false ceilings.

Aluminium dissipation plate.

Flat frosted glass diffuser.


Micro-perforated sheet metal brackets for false ceiling fixing.

Built-in hole dimension: Ø 290mm (Ø 11,4")

DATA SHEET



Code	XGR1206 LED-EM
System power consumption	20W
Efficacy	80.05lm/W
Light source	LED
Colour temperature	3000K Ra >80
Light distribution	diffused
Power supply	220-240V AC
Frequency	50/60Hz
Electrical configuration	emergency
Durata di autonomia in modalità emergenza	1h
Driver	integrated included
Nominal luminous flux	2330lm
Lumen output	1601lm
Efficiency	68.712%
Weight	1,7050Kg
Protection degree	IP20

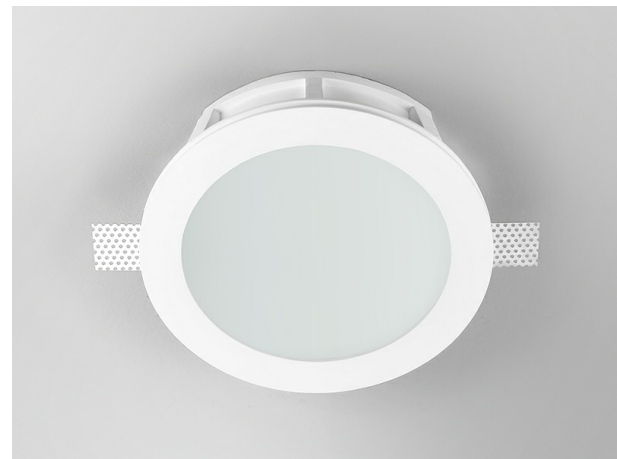

Colour

plaster



 TECHNICAL DRAWING


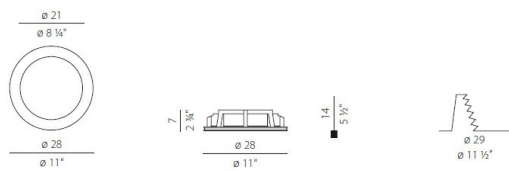


 DIAGRAMMA POLARE



cd/klm
 — C0 - C180 — C90 - C270

$\eta = 100\%$

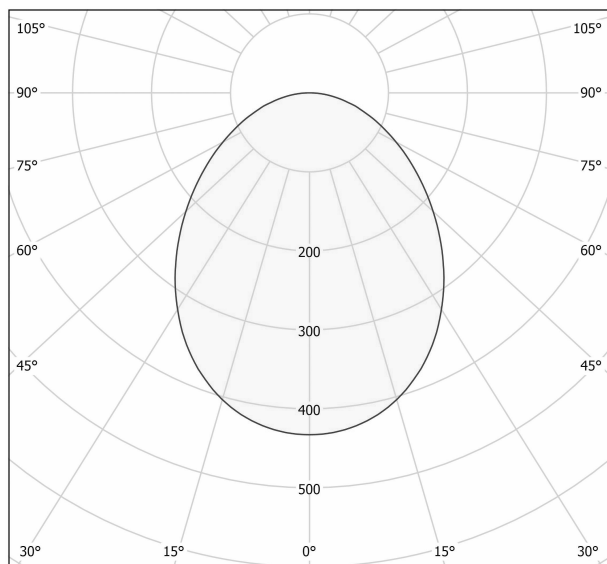