

100% Suspension - Silver



IP20 


DESIGN BY

Ross Lovegrove

DESCRIPTION

Only 6mm of thickness of the aluminum body. Controlled direct and indirect diffuse emission. Touch dimmer on the module body (Only for 100% Suspension). Independent management of each module even within multiple configurations (Only for 100% Suspension). It is possible to connect up to 7 modules with a single power supply. Mechanical connecting elements (Magnetic) and electrical on the edges of each module. Connection joints 90 ° and 120 °.

TECHNICAL DRAWINGS

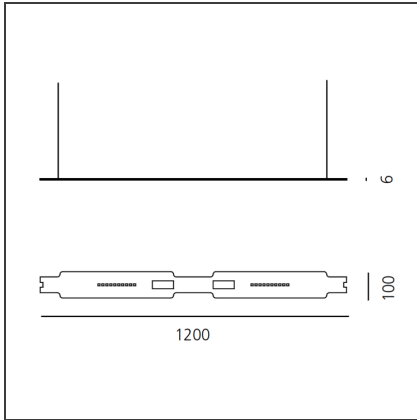

FEATURES

| | | | |
|----------------------|------------|----------------|-----------|
| Article Code: | DRL1903A00 | Series: | Scenarios |
| Colour: | Silver | | |
| Installation: | Suspension | | |
| Environment: | Indoor | | |

DIMENSIONS

| | |
|----------------|--------|
| Length: | cm 120 |
| Width: | cm 0,6 |
| Height: | cm 10 |
| Weight: | kg 1.6 |

INCLUDED SOURCES


| | | | |
|------------------|-----|-------------------------------|-------|
| Category: | LED | Color temperature (K): | 3000K |
| Number: | 1 | | |
| Watt: | 32W | | |
| Type: | 0 | | |
| Class: | A | | |

LUMINAIRE

| | | | |
|--------------|-----|--------------------------------------|--------------|
| Watt: | 32W | Delivered lumens output (lm): | 2427lm |
| | | CCT: | 4000K |
| | | Efficiency: | 80% |
| | | Efficacy: | 75,84lm/W |
| | | CRI: | 80 |
| | | Dimmer Typology: | Touch Dimmer |

ACCESSORIES


100% - 90°
Connector Silver
DRL1903AKTC100



100% - 120°
Connector Silver
DRL1903AKTC200




100% - Power
supply kit 40W 1
module Silver
DRL1903AKA01



100% - Power
supply kit 120W
2/4 modules Silver
DRL1903AKB01



100% - Power
supply kit 320W
5/7 modules Silver
DRL1903AKC01



100% - Terminal
head Silver
DRL1903ATPC00