

## A.24 - Ceiling Sharping Emission - Curved Elements - 24° - R=561mm - α=60° - 2700K - White



IP20   Dimmerable: 


### DESIGN BY

Carlotta de Bevilacqua

### DESCRIPTION

A.24 is an open platform. A single intelligent profile generates three light performances while following the architecture with continuity, freedom and exibility. It is a fluid system that harbours a patented optoelectronic technology.

### TECHNICAL DRAWINGS

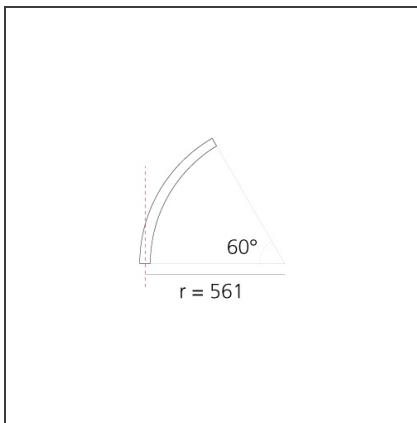

### FEATURES

|                      |                                        |                  |                     |
|----------------------|----------------------------------------|------------------|---------------------|
| <b>Article Code:</b> | AQ60801                                | <b>Series:</b>   | Indoor, 2018        |
| <b>Colour:</b>       | White                                  |                  | Artemide Collection |
| <b>Installation:</b> | Recessed, Wall,<br>Suspension, Ceiling | <b>Emission:</b> | Direct              |
| <b>Environment:</b>  | Indoor                                 |                  |                     |

### DIMENSIONS

|                |        |
|----------------|--------|
| <b>Width:</b>  | cm 2,7 |
| <b>Height:</b> | cm 5,4 |

### INCLUDED SOURCES

|                  |     |                               |                 |
|------------------|-----|-------------------------------|-----------------|
| <b>Category:</b> | LED | <b>Color temperature (K):</b> | 2700K           |
| <b>Number:</b>   | 1   | <b>Color Tolerance:</b>       | MacAdam 2SDCM   |
| <b>Watt:</b>     | 12W | <b>Service Life:</b>          | L70 (6K) 50000h |
| <b>Type:</b>     | 0   |                               |                 |

### LUMINAIRE

|              |     |                                      |       |
|--------------|-----|--------------------------------------|-------|
| <b>Watt:</b> | 12W | <b>Delivered lumens output (lm):</b> | 839lm |
|              |     | <b>CCT:</b>                          | 2700K |
|              |     | <b>CRI:</b>                          | 80    |

### Notes

\*Uses 1 DALI address. Each module, angle and curved elements are provided with mechanical and electrical joints and installation accessories. Bracket for fixing to ceiling is included: 1 for 1176mm length - 2 for 2352 mm length. End caps have to be ordered separately. Sharping kit (louvres and covers) has to be ordered separately. Depending on the driver, the product can be undimmable or dimmable DALI.

**ACCESSORIES**



150W Ceiling power supply kit - 351x61x111H - 230VAC-48VDC IP20 - Undimmable - White AQ17901



150W Ceiling power supply kit - 351x61x111H - 230VAC-48VDC IP20 - Undimmable - Black AQ17904



240W Bare power supply + plug 230VAC-48VDC IP20 - Undimmable (for dimmable version to be combined with "DALI-Selv interface") AQ18000




150W Bare power supply + plug 230VAC-48VDC IP20 - Undimmable (for dimmable version to be combined with "DALI-Selv interface") AQ18100




Cap for cable - White AQ35301



240W Ceiling power supply kit - 321x91x111H - 230VAC-48VDC IP20 - Dimmable DALI - White AQ17201



240W Ceiling power supply kit - 321x91x111H - 230VAC-48VDC IP20 - Dimmable DALI - Black AQ17204




A.24 - Flexible Cover L=10m - Black AQ92004



A.24 - Remote Box Power Supply Kit - 313x243x57,5h - (230VAC-48VDC 240W DALI) AQ16000



240W Recessed power supply kit - 396x195x112H - 230VAC-48VDC IP20 - DALI AQ16801



A.24 - Insulating Spacer (1x) - White AQ35201




240W Recessed power supply kit - 396x195x112H - 230VAC-48VDC IP20 - Undimmable AQ17801



240W Ceiling power supply kit - 351x61x111H -



240W Ceiling power supply kit - 351x61x111H -



A.24 - Louver for Curved Elements - White (Order 1pc


230VAC-48VDC  
IP20 -  
Undimmable -  
White  
AQ17301

230VAC-48VDC  
IP20 -  
Undimmable -  
Black  
AQ17304


for R=561 60°/90°  
R=750 45°, 2 pcs  
for R=750 90°)  
AQ91101




A.24 - Louver for  
Curved Elements  
- Black (Order 1 pc  
for R=561 60°/90°  
R=750 45°, 2 pcs  
for R=750 90°)  
AQ91104



A.24 - Flexible  
Cover L=10m -  
White  
AQ92001



A.24 - Wall/Ceiling  
Accessories - End  
Cap (2x) - White  
AQ35001



150W Ceiling  
power supply kit -  
321x91x111H -  
230VAC-48VDC  
IP20 - Dimmable  
DALI - White  
AQ17701




150W Ceiling  
power supply kit -  
321x91x111H -  
230VAC-48VDC  
IP20 - Dimmable  
DALI - Black  
AQ17704



A.24 - Flexible  
Cover L=2m -  
White  
AQ92101



A.24 - Flexible  
Cover L=2m -  
Black  
AQ92104



DALI to DALI-Selv  
Interface  
103x67x21H  
AQ18200



A.24 - Wall/Ceiling  
Accessories -  
Transition Cap -  
White  
AQ39401