

# A.24 - Ceiling Sharping Emission - Track - Direct Emission - 1176mm - 24° - 2700K - Brushed Copper



IP20 Dimmerable:


## DESIGN BY

Carlotta de Bevilacqua

## DESCRIPTION

A.24 is an open platform. A single intelligent profile generates three light performances while following the architecture with continuity, freedom and exibility. It is a fluid system that harbours a patented optoelectronic technology.

## TECHNICAL DRAWINGS

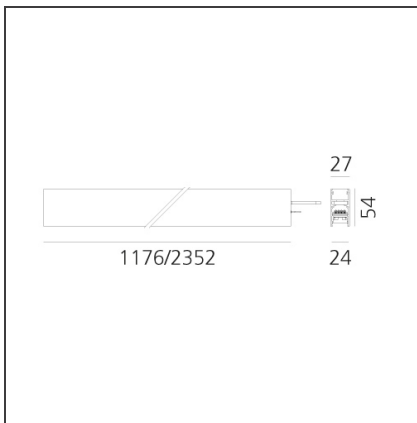

## FEATURES

<b>Article Code:</b>	AQ32418	<b>Series:</b>	Indoor, 2018
<b>Colour:</b>	Brushed Copper	<b>Emission:</b>	Artemide Collection Direct
<b>Installation:</b>	Recessed, Wall, Suspension, Ceiling		
<b>Environment:</b>	Indoor		

## DIMENSIONS

<b>Length:</b>	cm 117.6
<b>Width:</b>	cm 2.7
<b>Height:</b>	cm 5.4
<b>Weight:</b>	kg 1.4

## INCLUDED SOURCES

<b>Category:</b>	LED	<b>Color temperature (K):</b>	2700K
<b>Number:</b>	1	<b>Color Tolerance:</b>	MacAdam 2SDCM
<b>Watt:</b>	25W	<b>Service Life:</b>	L70 (6K) 50000h
<b>Type:</b>	0		

## LUMINAIRE

<b>Watt:</b>	22W	<b>Delivered lumens output (lm):</b>	1528lm
		<b>CCT:</b>	2700K
		<b>CRI:</b>	90

## Notes

\*Uses 1 DALI address. Each module, angle and curved elements are provided with mechanical and electrical joints and installation accessories. Bracket for fixing to ceiling is included: 1 for 1176mm length - 2 for 2352 mm length. End caps have to be ordered separately. Sharping kit (louvres and covers) has to be ordered separately. Depending on the driver, the product can be undimmable or dimmable DALI.


**ACCESSORIES**



150W Ceiling power supply kit - 351x61x111H - 230VAC-48VDC IP20 - Undimmable - White  
AQ17901



150W Ceiling power supply kit - 351x61x111H - 230VAC-48VDC IP20 - Undimmable - Black  
AQ17904



240W Bare power supply + plug 230VAC-48VDC IP20 - Undimmable (for dimmable version to be combined with "DALI-Selv interface")  
AQ18000



150W Bare power supply + plug 230VAC-48VDC IP20 - Undimmable (for dimmable version to be combined with "DALI-Selv interface")  
AQ18100



240W Ceiling power supply kit - 321x91x111H - 230VAC-48VDC IP20 - Dimmable DALI - White  
AQ17201



240W Ceiling power supply kit - 321x91x111H - 230VAC-48VDC IP20 - Dimmable DALI - Black  
AQ17204



A.24 - Remote Box Power Supply Kit - 313x243x57,5h - (230VAC-48VDC 240W DALI)  
AQ16000



240W Recessed power supply kit - 396x195x112H - 230VAC-48VDC IP20 - DALI  
AQ16801




240W Recessed power supply kit - 396x195x112H - 230VAC-48VDC IP20 - Undimmable  
AQ17801



240W Ceiling power supply kit - 351x61x111H - 230VAC-48VDC IP20 - Undimmable - White  
AQ17301



240W Ceiling power supply kit - 351x61x111H - 230VAC-48VDC IP20 - Undimmable - Black  
AQ17304



A.24 - Wall/Ceiling Accessories - End Cap (2x) - Brushed Copper  
AQ35018



A.24 - Wall/Ceiling Accessories - Transition Cap - Brushed copper  
AQ39418



Cap for cable - Brushed Copper  
AQ35318




150W Ceiling power supply kit - 321x91x111H - 230VAC-48VDC IP20 - Undimmable - White



150W Ceiling power supply kit - 321x91x111H - 230VAC-48VDC IP20 - Dimmable DALI - Black AQ17704




A.24 - Insulating Spacer (1x) - Brushed Copper AQ35218



A.24 - Sharping Kit L=1176mm - White AQ26001

230VAC-48VDC IP20 - Dimmable DALI - White AQ17701



DALI to DALI-Selv Interface 103x67x21H AQ18200



A.24 - Sharping Kit L=1176mm - Black AQ26004