# A.24 - Ceiling Sharping Emission - Track - Direct Emission - 1176mm - 24° - 4000K - Brushed Silver
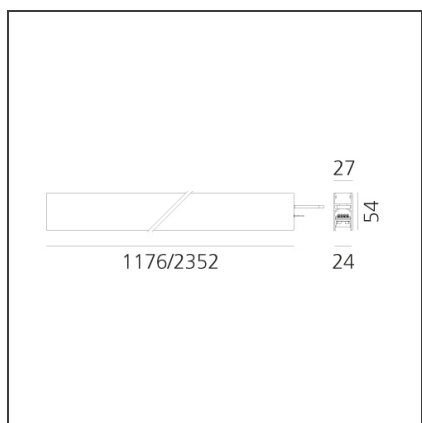


**IP**20   CE   Dimmerable: +◐–

## DESIGN BY

Carlotta de Bevilacqua

## DESCRIPTION

A.24 is an open platform. A single intelligent profile generates three light performances while following the architecture with continuity, freedom and  exibility. It is a fluid system that harbours a patented optoelectronic technology.

## TECHNICAL DRAWINGS



## FEATURES

| | | | |
|---|---|---|---|
| **Article Code:** | AQ32115 | **Series:** | Indoor, 2018 |
| **Colour:** | Brushed Silver | | Artemide Collection |
| **Installation:** | Recessed, Wall, Suspension, Ceiling | **Emission:** | Direct |
| **Environment:** | Indoor | | |

## DIMENSIONS

| | |
|---|---|
| **Length:** | cm 117.6 |
| **Width:** | cm 2.7 |
| **Height:** | cm 5.4 |
| **Weight:** | kg 1.4 |

## INCLUDED SOURCES

| | | | |
|---|---|---|---|
| **Category:** | LED | **Color temperature (K):** | 4000K |
| **Number:** | 1 | **CRI:** | 90 |
| **Watt:** | 25W | | |
| **Type:** | 0 | | |

## LUMINAIRE

| | | | |
|---|---|---|---|
| **Watt:** | 25W | **Delivered lumens output (lm):** | 1742lm |
| | | **CCT:** | 4000K |
| | | **CRI:** | 90 |

## Notes

*Uses 1 DALI address. Each module, angle and curved elements are provided with mechanical and electrical joints and installation accessories. Bracket for fixing to ceiling is included: 1 for 1176mm length - 2 for 2352 mm length. End caps have to be ordered separately. Sharping kit (louvres and covers) has to be ordered separately. Depending on the driver, the product can be undimmable or dimmable DALI.

We reserve the right to change our product specifications.
Please visit www.artemide.com for the latest product information

March 2019

## ACCESSORIES

150W Ceiling power supply kit - 351x61x111H - 230VAC-48VDC IP20 - Undimmable - White
AQ17901

150W Ceiling power supply kit - 351x61x111H - 230VAC-48VDC IP20 - Undimmable - Black
AQ17904

240W Bare power supply + plug 230VAC-48VDC IP20 - Undimmable (for dimmable version to be combined with "DALI-Selv interface")
AQ18000

150W Bare power supply + plug 230VAC-48VDC IP20 - Undimmable (for dimmable version to be combined with "DALI-Selv interface")
AQ18100

240W Ceiling power supply kit - 321x91x111H - 230VAC-48VDC IP20 - Dimmable DALI - White
AQ17201

240W Ceiling power supply kit - 321x91x111H - 230VAC-48VDC IP20 - Dimmable DALI - Black
AQ17204

A.24 - Remote Box Power Supply Kit - 313x243x57,5h - (230VAC-48VDC 240W DALI)
AQ16000

240W Recessed power supply kit - 396x195x112H - 230VAC-48VDC IP20 - DALI
AQ16801

240W Recessed power supply kit - 396x195x112H - 230VAC-48VDC IP20 - Undimmable
AQ17801

240W Ceiling power supply kit - 351x61x111H - 230VAC-48VDC IP20 - Undimmable - White
AQ17301

A.24 - Wall/Ceiling Accessories - End Cap (2x) - Brushed Silver
AQ35015

A.24 - Recessed Power Supply Kit
AQ16800

240W Ceiling power supply kit - 351x61x111H - 230VAC-48VDC IP20 - Undimmable -

A.24 - Wall/Ceiling Accessories - Transition Cap - Brushed silver
AQ39415

150W Ceiling power supply kit - 321x91x111H - 230VAC-48VDC IP20 - Dimmable DALI - White

We reserve the right to change our product specifications.
Please visit www.artemide.com for the latest product information

March 2019

Black
AQ17304



150W Ceiling
power supply kit -
321x91x111H -
230VAC-48VDC
IP20 - Dimmable
DALI - Black
AQ17704

AQ17701



A.24 - Insulating
Spacer (1x) -
Brushed Silver
AQ35215



DALI to DALI-Selv
Interface
103x67x21H
AQ18200



A.24 - Sharping Kit
L=1176mm -
White
AQ26001



A.24 - Sharping Kit
L=1176mm - Black
AQ26004