

A.24 - Ceiling Sharping Emission - Track - Direct Emission - 2352mm - 62° - 4000K - Brushed Silver



IP20 Dimmerable:


DESIGN BY

Carlotta de Bevilacqua

DESCRIPTION

A.24 is an open platform. A single intelligent profile generates three light performances while following the architecture with continuity, freedom and exibility. It is a fluid system that harbours a patented optoelectronic technology.

TECHNICAL DRAWINGS

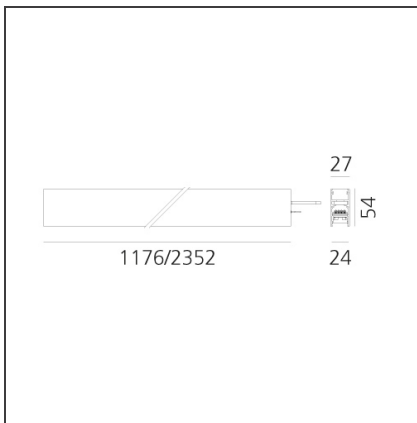

FEATURES

| | | | |
|----------------------|-------------------------------------|------------------|----------------------------|
| Article Code: | AQ34315 | Series: | Indoor, 2018 |
| Colour: | Brushed Silver | Emission: | Artemide Collection Direct |
| Installation: | Recessed, Wall, Suspension, Ceiling | | |
| Environment: | Indoor | | |

DIMENSIONS

| | |
|----------------|----------|
| Length: | cm 235.2 |
| Width: | cm 2.7 |
| Height: | cm 5.4 |
| Weight: | kg 2.7 |

INCLUDED SOURCES

| | | | |
|------------------|-----|-------------------------------|-------|
| Category: | LED | Color temperature (K): | 4000K |
| Number: | 1 | CRI: | 90 |
| Watt: | 50W | | |
| Type: | 0 | | |

LUMINAIRE

| | | | |
|--------------|-----|--------------------------------------|--------|
| Watt: | 50W | Delivered lumens output (lm): | 3704lm |
| | | CCT: | 4000K |
| | | CRI: | 90 |

Notes

*Uses 2 DALI addresses. Each module, angle and curved elements are provided with mechanical and electrical joints and installation accessories. Bracket for fixing to ceiling is included: 1 for 1176mm length - 2 for 2352 mm length. End caps have to be ordered separately. Sharping kit (louvres and covers) has to be ordered separately. Depending on the driver, the product can be undimmable or dimmable DALI.


ACCESSORIES



150W Ceiling power supply kit - 351x61x111H - 230VAC-48VDC IP20 - Undimmable - White
AQ17901



150W Ceiling power supply kit - 351x61x111H - 230VAC-48VDC IP20 - Undimmable - Black
AQ17904



240W Bare power supply + plug 230VAC-48VDC IP20 - Undimmable (for dimmable version to be combined with "DALI-Selv interface")
AQ18000



150W Bare power supply + plug 230VAC-48VDC IP20 - Undimmable (for dimmable version to be combined with "DALI-Selv interface")
AQ18100



240W Ceiling power supply kit - 321x91x111H - 230VAC-48VDC IP20 - Dimmable DALI - White
AQ17201



240W Ceiling power supply kit - 321x91x111H - 230VAC-48VDC IP20 - Dimmable DALI - Black
AQ17204



A.24 - Remote Box Power Supply Kit - 313x243x57,5h - (230VAC-48VDC 240W DALI)
AQ16000



240W Recessed power supply kit - 396x195x112H - 230VAC-48VDC IP20 - DALI
AQ16801



240W Recessed power supply kit - 396x195x112H - 230VAC-48VDC IP20 - Undimmable
AQ17801



240W Ceiling power supply kit - 351x61x111H - 230VAC-48VDC IP20 - Undimmable - White
AQ17301



A.24 - Wall/Ceiling Accessories - End Cap (2x) - Brushed Silver
AQ35015



A.24 - Recessed Power Supply Kit
AQ16800



240W Ceiling power supply kit - 351x61x111H - 230VAC-48VDC IP20 - Undimmable - White
AQ17301



A.24 - Sharping Kit L=2352mm - Black
AQ26104



A.24 - Wall/Ceiling Accessories - Transition Cap - Brushed silver
AQ39415

Black
AQ17304




power supply kit -
321x91x111H -
230VAC-48VDC
IP20 - Dimmable
DALI - White
AQ17701



power supply kit -
321x91x111H -
230VAC-48VDC
IP20 - Dimmable
DALI - Black
AQ17704



A.24 - Insulating
Spacer (1x) -
Brushed Silver
AQ35215



DALI to DALI-Selv
Interface
103x67x21H
AQ18200



A.24 - Sharping Kit
L=2352mm -
White
AQ26101