


A.24 - Recessed Sharping Emission - Curved Elements - 24° - R=561mm - α=90° - 4000K - Black



IP20   Dimmerable: 


DESIGN BY

Carlotta de Bevilacqua

DESCRIPTION

A.24 is an open platform. A single intelligent profile generates three light performances while following the architecture with continuity, freedom and exibility. It is a fluid system that harbours a patented optoelectronic technology.

TECHNICAL DRAWINGS

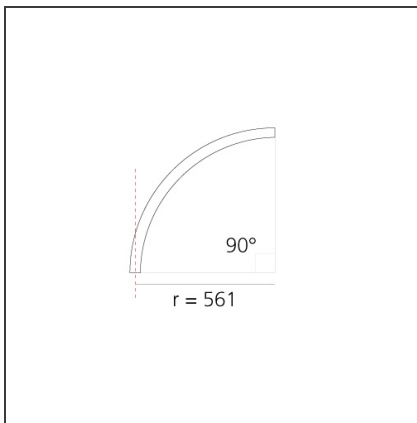

FEATURES

| | | | |
|----------------------|--|------------------|---------------------|
| Article Code: | AQ51504 | Series: | Indoor, 2018 |
| Colour: | Black | | Artemide Collection |
| Installation: | Recessed, Wall, Suspension, Ceiling | Emission: | Direct |
| Environment: | Indoor | | |

DIMENSIONS

| | |
|------------------------|--------|
| Width: | cm 2.7 |
| Recessed depth: | cm 5.4 |

INCLUDED SOURCES

| | | | |
|------------------|-----|-------------------------------|-------|
| Category: | LED | Color temperature (K): | 4000K |
| Number: | 1 | CRI: | 90 |
| Watt: | 12W | | |
| Type: | 0 | | |

LUMINAIRE

| | | | |
|--------------|-----|--------------------------------------|-------|
| Watt: | 12W | Delivered lumens output (lm): | 839lm |
| | | CCT: | 4000K |
| | | CRI: | 90 |

Notes

*Uses 1 DALI address. Each module, angle and curved elements are provided with mechanical and electrical joints and installation accessories. End caps have to be ordered separately. Sharping kit (louvres and covers) has to be ordered separately. Depending on the driver, the product can be undimmable or dimmable DALI.

ACCESSORIES



150W Ceiling power supply kit - 351x61x111H - 230VAC-48VDC IP20 - Undimmable - White
AQ17901



150W Ceiling power supply kit - 351x61x111H - 230VAC-48VDC IP20 - Undimmable - Black
AQ17904



240W Bare power supply + plug 230VAC-48VDC IP20 - Undimmable (for dimmable version to be combined with "DALI-Selv interface")
AQ18000




150W Bare power supply + plug 230VAC-48VDC IP20 - Undimmable (for dimmable version to be combined with "DALI-Selv interface")
AQ18100



240W Ceiling power supply kit - 321x91x111H - 230VAC-48VDC IP20 - Dimmable DALI - White
AQ17201



240W Ceiling power supply kit - 321x91x111H - 230VAC-48VDC IP20 - Dimmable DALI - Black
AQ17204



A.24 - Flexible Cover L=10m - Black
AQ92004



A.24 - Remote Box Power Supply Kit - 313x243x57,5h - (230VAC-48VDC 240W DALI)
AQ16000



240W Recessed power supply kit - 396x195x112H - 230VAC-48VDC IP20 - DALI
AQ16801



240W Recessed power supply kit - 396x195x112H - 230VAC-48VDC IP20 - Undimmable
AQ17801




240W Ceiling power supply kit - 351x61x111H - 230VAC-48VDC IP20 - Undimmable - White
AQ17301




240W Ceiling power supply kit - 351x61x111H - 230VAC-48VDC IP20 - Undimmable - Black
AQ17304



A.24 - Recessed Accessories - Transition Cap - Black
AQ29004



A.24 - Louver for Courved Elements
(1x) - Black



A.24 - Louver for Courved Elements - R=561mm - White
AQ91001




A.24 - Recessed Accessories - Insulating Spacer
IMAGE AVAILABLE



A.24 - Recessed
Accessories - End
Cap (2x) - Black
AQ25004

AQ91004



A.24 - Flexible
Cover L=10m -
White
AQ92001


AQ24104



150W Ceiling
power supply kit -
321x91x111H -
230VAC-48VDC
IP20 - Dimmable
DALI - White
AQ17701



150W Ceiling
power supply kit -
321x91x111H -
230VAC-48VDC
IP20 - Dimmable
DALI - Black
AQ17704



DALI to DALI-Selv
Interface
103x67x21H
AQ18200