





A.24 - Suspension Diffused Emission - Curved Elements - R=750mm - $\alpha=45^\circ$ - 4000K - Brushed Silver

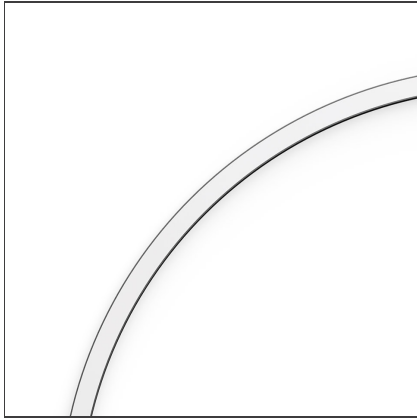


IP20    Dimmerable: 

DESIGN BY

Carlotta de Bevilacqua

DESCRIPTION

TECHNICAL DRAWINGS

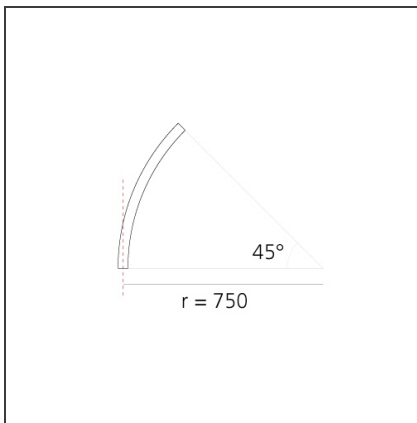

FEATURES

| | | | |
|----------------------|--|------------------|-------------------------------------|
| Article Code: | AQ72215 | Series: | Indoor, 2018 Artemide Collection |
| Colour: | Brushed Silver | Emission: | Direct |
| Installation: | Ceiling, Suspension, Wall, Recessed | | |
| Environment: | Indoor | | |

DIMENSIONS

| | |
|------------------------|--------|
| Width: | cm 2.7 |
| Recessed depth: | cm 5.4 |

INCLUDED SOURCES

| | | | |
|------------------|-----|-------------------------------|-----------------|
| Category: | LED | Color temperature (K): | 4000K |
| Number: | 1 | Color Tolerance: | MacAdam 2SDCM |
| Watt: | 17W | Service Life: | L70 (6K) 50000h |
| Type: | 0 | | |
| Class: | A | | |

LUMINAIRE

| | | | |
|--------------|-----|--------------------------------------|--------|
| Watt: | 17W | Delivered lumens output (lm): | 1187lm |
| | | CCT: | 4000K |
| | | CRI: | 80 |

Notes

*Uses 1 DALI address. Each module, angle and curved elements are provided with mechanical and electrical joints and installation accessories. 1 suspension cable is also included. End caps have to be ordered separately. Opal diffusing screen has to be ordered separately. Depending on the driver, the product can be undimmable or dimmable DALI.

ACCESSORIES



Suspension Accessories - Recessed Power Supply Kit For Suspension Modules (230VAC-48VDC 240W DALI) - White
AQ15401




240W Bare power supply + plug 230VAC-48VDC IP20 - Undimmable (for dimmable version to be combined with "DALI-Selv interface")
AQ18000



Flexible Opal Diffusing Screen
AQ90300




Suspension Accessories - Recessed Power Supply Kit For Suspension Modules (230VAC-48VDC 240W DALI) - Black
AQ15404



150W Bare power supply + plug 230VAC-48VDC IP20 - Undimmable (for dimmable version to be combined with "DALI-Selv interface")
AQ18100




A.24 - Suspension Accessories - Ceiling Power Supply Kit For Suspension Modules (230VAC-48VDC 240W DALI) - White
AQ16101




A.24 - Suspension Accessories - Ceiling Power Supply Kit For Suspension Modules (230VAC-48VDC 240W DALI) - Black
AQ16104




A.24 - Remote Box Power Supply Kit - 313x243x57,5h - (230VAC-48VDC 240W DALI)
AQ16000



A.24 - Flexible Opal Diffusing Screen - 10m
AQ90000



A.24 - Flexible Opal Diffusing Screen - 25m
AQ90100



A.24 - Flexible Opal Diffusing Screen - 50m
AQ90200




240W Ceiling power supply kit - 351x61x111H - 230VAC-48VDC IP20 - Undimmable - Black
AQ17104

A.24 - Suspension Accessories - End Cap (2x) - Brushed

150W Ceiling power supply kit - 351x61x111H -

150W Ceiling power supply kit - 351x61x111H -



Silver
AQ45115



230VAC-48VDC
IP20 -
Undimmable -
White
AQ17601



230VAC-48VDC
IP20 -
Undimmable -
Black
AQ17604




150W Ceiling
power supply - kit
321x91x111H -
230VAC-48VDC
IP20 - Dimmable
DALI - White
AQ17501



150W Ceiling
power supply - kit
321x91x111H -
230VAC-48VDC
IP20 - Dimmable
DALI - Black
AQ17504



A.24 - Suspension
Accessories -
Transition Cap -
Brushed silver
AQ49415



DALI to DALI-Selv
Interface
103x67x21H
AQ18200



240W Recessed
power supply kit -
396x195x112H -
230VAC-48VDC
IP20 -
Undimmable -
White
AQ17401



A.24 - Suspension
Accessories -
Insulating Spacer
(1x) - Brushed
Silver
AQ45215



240W Recessed
power supply kit -
396x195x112H -
230VAC-48VDC
IP20 -
Undimmable -
Black
AQ17404



240W Ceiling
power supply kit -
351x61x111H -
230VAC-48VDC
IP20 -
Undimmable -
White
AQ17101