


A.24 - Suspension Diffused Emission - Curved Elements - R=750mm - $\alpha=90^\circ$ - 2700K - Brushed Copper

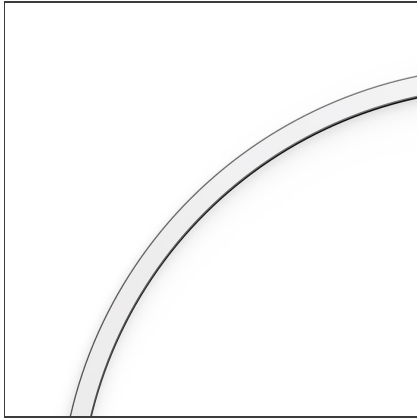


IP20    Dimmerable: 

DESIGN BY

Carlotta de Bevilacqua

DESCRIPTION

TECHNICAL DRAWINGS

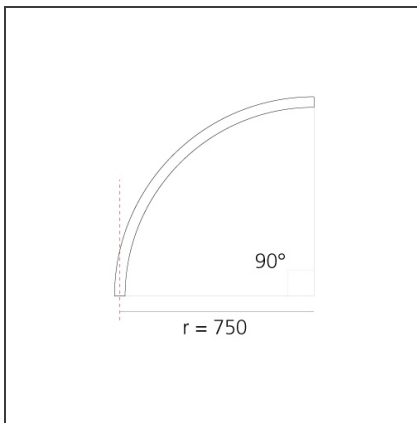

FEATURES

Article Code:	AQ73718	Series:	Indoor, 2018
Colour:	Brushed Copper	Emission:	Artemide Collection Direct
Installation:	Recessed, Wall, Suspension, Ceiling		
Environment:	Indoor		

DIMENSIONS

Width:	cm 2.7
Recessed depth:	cm 5.4

INCLUDED SOURCES

Category:	LED	Color temperature (K):	2700K
Number:	1	Color Tolerance:	MacAdam 2SDCM
Watt:	34W	Service Life:	L70 (6K) 50000h
Type:	0		

LUMINAIRE

Watt:	34W	Delivered lumens output (lm):	2374lm
		CCT:	2700K
		CRI:	80

Notes

*Uses 1 DALI address. Each module, angle and curved elements are provided with mechanical and electrical joints and installation accessories. 1 suspension cable is also included. End caps have to be ordered separately. Opal diffusing screen has to be ordered separately. Depending on the driver, the product can be undimmable or dimmable DALI.

ACCESSORIES



Suspension Accessories - Recessed Power Supply Kit For Suspension Modules (230VAC-48VDC 240W DALI) - Black
AQ15404




A.24 - Suspension Accessories - Ceiling Power Supply Kit For Suspension Modules (230VAC-48VDC 240W DALI) - White
AQ16101



A.24 - Suspension Accessories - Ceiling Power Supply Kit For Suspension Modules (230VAC-48VDC 240W DALI) - Black
AQ16104




A.24 - Remote Box Power Supply Kit - 313x243x57,5h - (230VAC-48VDC 240W DALI)
AQ16000




A.24 - Opal Diffusing Screen - 10m
AQ16200




Suspension Accessories - Recessed Power Supply Kit For Suspension Modules (230VAC-48VDC 240W DALI) - White
AQ15401




240W Bare power supply + plug 230VAC-48VDC IP20 - Undimmable (for dimmable version to be combined with "DALI-Selv interface")
AQ18000




150W Bare power supply + plug 230VAC-48VDC IP20 - Undimmable (for dimmable version to be combined with "DALI-Selv interface")
AQ18100




A.24 - Opal Diffusing Screen - 25m
AQ16300




A.24 - Opal Diffusing Screen - 50m
AQ16400



A.24 - Flexible Opal Diffusing Screen - 10m
AQ90000




A.24 - Flexible Opal Diffusing Screen - 25m
AQ90100



A.24 - Flexible Opal Diffusing Screen - 50m
AQ90200



240W Ceiling power supply kit - 351x61x111H - 230VAC-48VDC IP20 -



A.24 - Suspension Accessories - End Cap (2x) - Brushed Copper
AQ45118



150W Ceiling power supply kit - 351x61x111H - 230VAC-48VDC IP20 -

AQ17104



150W Ceiling
power supply kit -
351x61x111H -
230VAC-48VDC
IP20 -
Undimmable -
Black
AQ17604



150W Ceiling
power supply - kit
321x91x111H -
230VAC-48VDC
IP20 - Dimmable
DALI - White
AQ17501


AQ17601



150W Ceiling
power supply - kit
321x91x111H -
230VAC-48VDC
IP20 - Dimmable
DALI - Black
AQ17504



A.24 - Suspension
Accessories -
Transition Cap -
Brushed copper
AQ49418



DALI to DALI-Selv
Interface
103x67x21H
AQ18200



240W Recessed
power supply kit -
396x195x112H -
230VAC-48VDC
IP20 -
Undimmable -
White
AQ17401



240W Recessed
power supply kit -
396x195x112H -
230VAC-48VDC
IP20 -
Undimmable -
Black
AQ17404



A.24 - Suspension
Accessories -
Insulating Spacer
(1x) - Brushed
Copper
AQ45218



240W Ceiling
power supply kit -
351x61x111H -
230VAC-48VDC
IP20 -
Undimmable -
White
AQ17101