

A.24 - Suspension Diffused Emission - Track - Direct + Indirect Emission - 2352mm - 2700K - Black




IP20 Dimmerable: + -

DESIGN BY

Carlotta de Bevilacqua

TECHNICAL DRAWINGS

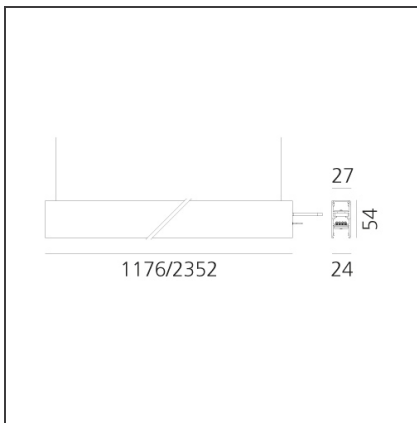

FEATURES

Article Code:	AQ46504	Series:	Indoor, 2018
Colour:	Black	Emission:	Artemide Collection Direct
Installation:	Ceiling, Suspension, Wall, Recessed		
Environment:	Indoor		

DIMENSIONS

Length:	cm 235.2
Width:	cm 2.7
Weight:	kg 2.7
Recessed depth:	cm 5.4

INCLUDED SOURCES

Category:	LED	Color temperature (K):	2700K
Number:	1	Color Tolerance:	MacAdam 2SDCM
Watt:	66W	Service Life:	L70 (6K) 50000h
Type:	0		
Category:	LED	Color temperature (K):	2700K
Number:	1	Color Tolerance:	MacAdam 2SDCM
Watt:	32W	Service Life:	L70 (6K) 50000h
Type:	0		

LUMINAIRE

Watt:	66W + 32W	Delivered lumens output (lm):	5682lm + 3004lm
		CCT:	2700K
		Efficiency:	65%
		Efficacy:	88.64lm/W
		CRI:	80

Notes

*Uses 3 DALI addresses. Each module, angle and curved elements are provided with mechanical and electrical joints and installation accessories. 1 suspension cable is also included. End caps have to be ordered separately. Opal diffusing screen has to be ordered separately. Depending on the driver, the product can be undimmable or dimmable DALI.


ACCESSORIES



A.24 - Suspension Accessories - Insulating Spacer (1x) - Black
AQ45204




A.24 - Suspension Accessories - Transition Cap - Black
AQ49404



A.24 - Suspension Accessories - End Cap (2x) - Black
AQ45104




Suspension Accessories - Recessed Power Supply Kit For Suspension Modules (230VAC-48VDC 240W DALI) - White
AQ15401



240W Bare power supply + plug 230VAC-48VDC IP20 - Undimmable (for dimmable version to be combined with "DALI-Selv interface")
AQ18000



Suspension Accessories - Recessed Power Supply Kit For Suspension Modules (230VAC-48VDC 240W DALI) - Black
AQ15404




150W Bare power supply + plug 230VAC-48VDC IP20 - Undimmable (for dimmable version to be combined with "DALI-Selv interface")
AQ18100




A.24 - Suspension Accessories - Ceiling Power Supply Kit For Suspension Modules (230VAC-48VDC 240W DALI) - White
AQ16101



A.24 - Suspension Accessories - Ceiling Power Supply Kit For Suspension Modules (230VAC-48VDC 240W DALI) - Black
AQ16104




A.24 - Opal Diffusing Screen - 25m
AQ16300




A.24 - Opal Diffusing Screen - 50m
AQ16400



A.24 - Remote Box Power Supply Kit - 313x243x57,5h - (230VAC-48VDC 240W DALI)



A.24 - Opal Diffusing Screen - 2352mm
AQ16600
240W Ceiling



A.24 - Opal Diffusing Screen - 3528mm
AQ16700
150W Ceiling



power supply kit -
351x61x111H -
230VAC-48VDC
IP20 -
Undimmable -
Black
AQ17104



power supply kit -
351x61x111H -
230VAC-48VDC
IP20 -
Undimmable -
White
AQ17601




150W Ceiling
power supply kit -
351x61x111H -
230VAC-48VDC
IP20 -
Undimmable -
Black
AQ17604




150W Ceiling
power supply - kit
321x91x111H -
230VAC-48VDC
IP20 - Dimmable
DALI - White
AQ17501



150W Ceiling
power supply - kit
321x91x111H -
230VAC-48VDC
IP20 - Dimmable
DALI - Black
AQ17504



A.24 - Opal
Diffusing Screen -
10m
AQ16200



DALI to DALI-Selv
Interface
103x67x21H
AQ18200



240W Recessed
power supply kit -
396x195x112H -
230VAC-48VDC
IP20 -
Undimmable -
White
AQ17401



240W Recessed
power supply kit -
396x195x112H -
230VAC-48VDC
IP20 -
Undimmable -
Black
AQ17404



240W Ceiling
power supply kit -
351x61x111H -
230VAC-48VDC
IP20 -
Undimmable -
White
AQ17101