





A.24 - Suspension Diffused Emission - Track - Direct Emission - 1176mm - 4000K - Brushed Copper




IP20    Dimmerable: 

DESIGN BY

Carlotta de Bevilacqua

DESCRIPTION

TECHNICAL DRAWINGS

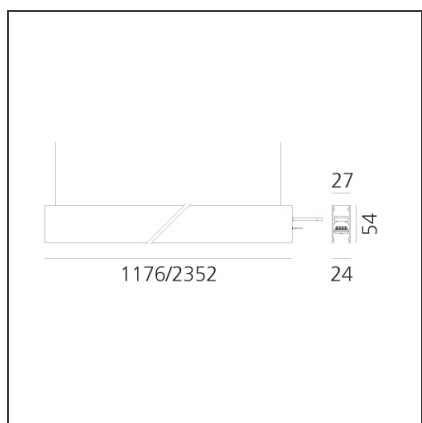

FEATURES

| | | | |
|---------------|-------------------------------------|-----------|---------------------|
| Article Code: | AQ41118 | Series: | Indoor, 2018 |
| Colour: | Brushed Copper | | Artemide Collection |
| Installation: | Ceiling, Suspension, Wall, Recessed | Emission: | Direct |
| Environment: | Indoor | | |

DIMENSIONS

| | |
|-----------------|----------|
| Length: | cm 117.6 |
| Width: | cm 2.7 |
| Weight: | kg 1.7 |
| Recessed depth: | cm 5.4 |

INCLUDED SOURCES

| | | | |
|-----------|-----|------------------------|-----------------|
| Category: | LED | Color temperature (K): | 4000K |
| Number: | 1 | Color Tolerance: | MacAdam 2SDCM |
| Watt: | 33W | CRI: | 80 |
| Type: | 0 | Service Life: | L70 (6K) 50000h |

LUMINAIRE

| | | | |
|-------|-----|-------------------------------|--------|
| Watt: | 33W | Delivered lumens output (lm): | 3013lm |
| | | CCT: | 4000K |
| | | CRI: | 80 |

Notes

*Uses 1 DALI address. Each module, angle and curved elements are provided with mechanical and electrical joints and installation accessories. 1 suspension cable is also included. End caps have to be ordered separately. Opal diffusing screen has to be ordered separately. Depending on the driver, the product can be undimmable or dimmable DALI.

ACCESSORIES


Suspension
Accessories -
Recessed Power
Supply Kit For
Suspension
Modules (230VAC-
48VDC 240W DALI)
- White
AQ15401



240W Bare power
supply + plug
230VAC-48VDC
IP20 -
Undimmable (for
dimmable version
to be combined
with "DALI-Selv
interface")
AQ18000



Suspension
Accessories -
Recessed Power
Supply Kit For
Suspension
Modules (230VAC-
48VDC 240W DALI)
- Black
AQ15404




150W Bare power
supply + plug
230VAC-48VDC
IP20 -
Undimmable (for
dimmable version
to be combined
with "DALI-Selv
interface")
AQ18100




A.24 - Suspension
Accessories -
Ceiling Power
Supply Kit For
Suspension
Modules (230VAC-
48VDC 240W DALI)
- White
AQ16101




A.24 - Suspension
Accessories -
Ceiling Power
Supply Kit For
Suspension
Modules (230VAC-
48VDC 240W DALI)
- Black
AQ16104



A.24 - Opal
Diffusing Screen -
25m
AQ16300




A.24 - Opal
Diffusing Screen -
50m
AQ16400



A.24 - Opal
Diffusing Screen -
1176mm
AQ16500




A.24 - Remote Box
Power Supply Kit -
313x243x57,5h -
(230VAC-48VDC
240W DALI)
AQ16000



A.24 - Opal
Diffusing Screen -
3528mm
AQ16700



240W Ceiling
power supply kit -
351x61x111H -
230VAC-48VDC
IP20 -
Undimmable -
Black
AQ17104



A.24 - Suspension
Accessories - End



150W Ceiling
power supply kit -



150W Ceiling
power supply kit -

Cap (2x) - Brushed
Copper
AQ45118




150W Ceiling
power supply - kit
321x91x111H -
230VAC-48VDC
IP20 - Dimmable
DALI - White
AQ17501

351x61x111H -
230VAC-48VDC
IP20 -
Undimmable -
White
AQ17601



150W Ceiling
power supply - kit
321x91x111H -
230VAC-48VDC
IP20 - Dimmable
DALI - Black
AQ17504


351x61x111H -
230VAC-48VDC
IP20 -
Undimmable -
Black
AQ17604



A.24 - Opal
Diffusing Screen -
10m
AQ16200



A.24 - Suspension
Accessories -
Transition Cap -
Brushed copper
AQ49418



DALI to DALI-Selv
Interface
103x67x21H
AQ18200



240W Recessed
power supply kit -
396x195x112H -
230VAC-48VDC
IP20 -
Undimmable -
White
AQ17401



240W Recessed
power supply kit -
396x195x112H -
230VAC-48VDC
IP20 -
Undimmable -
Black
AQ17404



A.24 - Suspension
Accessories -
Insulating Spacer
(1x) - Brushed
Copper
AQ45218



240W Ceiling
power supply kit -
351x61x111H -
230VAC-48VDC
IP20 -
Undimmable -
White
AQ17101