




## A.24 - Suspension Sharping Emission - Curved Elements - 24° - R=561mm - α=60° - 2700K - Black



IP20   Dimmerable: 


### DESIGN BY

Carlotta de Bevilacqua

### DESCRIPTION

A.24 is an open platform. A single intelligent profile generates three light performances while following the architecture with continuity, freedom and exibility. It is a fluid system that harbours a patented optoelectronic technology.

### TECHNICAL DRAWINGS

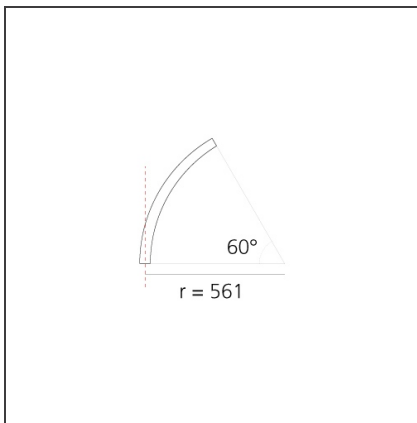

### FEATURES

|                      |  |                  |                     |
|----------------------|--|------------------|---------------------|
| <b>Article Code:</b> | AQ70804                                | <b>Series:</b>   | Indoor, 2018        |
| <b>Colour:</b>       | Black                                  |                  | Artemide Collection |
| <b>Installation:</b> | Recessed, Wall,<br>Suspension, Ceiling | <b>Emission:</b> | Direct              |
| <b>Environment:</b>  | Indoor                                 |                  |                     |

### DIMENSIONS

|                |        |
|----------------|--------|
| <b>Width:</b>  | cm 2.7 |
| <b>Height:</b> | cm 5.4 |

### INCLUDED SOURCES

|                  |     |                               |                 |
|------------------|-----|-------------------------------|-----------------|
| <b>Category:</b> | LED | <b>Color temperature (K):</b> | 2700K           |
| <b>Number:</b>   | 1   | <b>Color Tolerance:</b>       | MacAdam 2SDCM   |
| <b>Watt:</b>     | 12W | <b>Service Life:</b>          | L70 (6K) 50000h |
| <b>Type:</b>     | 0   |                               |                 |

### LUMINAIRE

|              |     |                                      |       |
|--------------|-----|--------------------------------------|-------|
| <b>Watt:</b> | 12W | <b>Delivered lumens output (lm):</b> | 839lm |
|              |     | <b>CCT:</b>                          | 2700K |
|              |     | <b>CRI:</b>                          | 90    |

### Notes

\*Uses 1 DALI address. Each module, angle and curved elements are provided with mechanical and electrical joints and installation accessories. 1 suspension cable is also included. End caps have to be ordered separately. Sharping kit (louvres and covers) has to be ordered separately. Depending on the driver, the product can be undimmable or dimmable DALI.

**ACCESSORIES**



A.24 - Suspension Accessories - Transition Cap - Black  
AQ49404




Suspension Accessories - Recessed Power Supply Kit For Suspension Modules (230VAC-48VDC 240W DALI) - Black  
AQ15404



A.24 - Suspension Accessories - Ceiling Power Supply Kit For Suspension Modules (230VAC-48VDC 240W DALI) - White  
AQ16101



A.24 - Suspension Accessories - Ceiling Power Supply Kit For Suspension Modules (230VAC-48VDC 240W DALI) - Black  
AQ16104




A.24 - Flexible Cover L=10m - Black  
AQ92004



A.24 - Insulating Spacer (1x) - Black  
AQ45304




A.24 - Remote Box Power Supply Kit - 313x243x57,5h - (230VAC-48VDC 240W DALI)  
AQ16000




A.24 - Suspension Accessories - End Cap (2x) - Black  
AQ45104



Suspension Accessories - Recessed Power Supply Kit For Suspension Modules (230VAC-48VDC 240W DALI) - White  
AQ15401



240W Bare power supply + plug 230VAC-48VDC IP20 - Undimmable (for dimmable version to be combined with "DALI-Selv interface")  
AQ18000



150W Bare power supply + plug 230VAC-48VDC IP20 - Undimmable (for dimmable version to be combined with "DALI-Selv interface")  
AQ18100



240W Ceiling power supply kit - 351x61x111H - 230VAC-48VDC IP20 - Undimmable - Black  
AQ17104  
150W Ceiling power supply kit - 351x61x111H - 230VAC-48VDC IP20 -



150W Ceiling power supply kit - 351x61x111H - 230VAC-48VDC IP20 - Undimmable - White  
AQ17601  
150W Ceiling power supply - kit 321x91x111H - 230VAC-48VDC IP20 - Dimmable

Undimmable -  
Black  
AQ17604

DALI - White  
AQ17501




A.24 - Louver for  
Curved Elements  
- White (Order 1pc  
for R=561 60°/90°  
R=750 45°, 2 pcs  
for R=750 90°)  
AQ91101




150W Ceiling  
power supply - kit  
321x91x111H -  
230VAC-48VDC  
IP20 - Dimmable  
DALI - Black  
AQ17504



A.24 - Louver for  
Curved Elements  
- Black (Order 1pc  
for R=561 60°/90°  
R=750 45°, 2 pcs  
for R=750 90°)  
AQ91104




A.24 - Flexible  
Cover L=10m -  
White  
AQ92001



A.24 - Flexible  
Cover L=2m -  
White  
AQ92101



A.24 - Flexible  
Cover L=2m -  
Black  
AQ92104



DALI to DALI-Selv  
Interface  
103x67x21H  
AQ18200



240W Recessed  
power supply kit -  
396x195x112H -  
230VAC-48VDC  
IP20 -  
Undimmable -  
White  
AQ17401



240W Recessed  
power supply kit -  
396x195x112H -  
230VAC-48VDC  
IP20 -  
Undimmable -  
Black  
AQ17404



240W Ceiling  
power supply kit -  
351x61x111H -  
230VAC-48VDC  
IP20 -  
Undimmable -  
White  
AQ17101