





## A.24 - Wall/Ceiling Diffused Emission - Track - Direct Emission - 1176mm - 3000K - White



IP20    Dimmerable: 


### DESIGN BY

Carlotta de Bevilacqua

### DESCRIPTION

A.24 is an open platform. A single intelligent profile generates three light performances while following the architecture with continuity, freedom and exibility. It is a fluid system that harbours a patented optoelectronic technology.

### TECHNICAL DRAWINGS

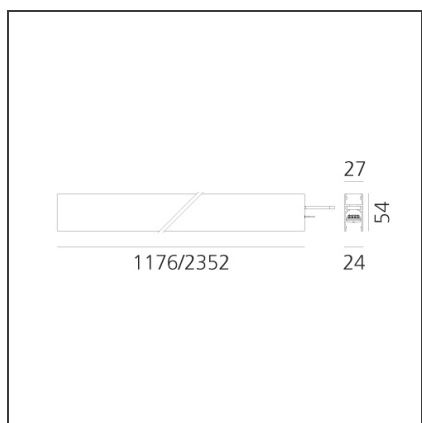

### FEATURES

<b>Article Code:</b>	AQ31001	<b>Series:</b>	Indoor, 2018
<b>Colour:</b>	White		Artemide Collection
<b>Installation:</b>	Ceiling, Suspension, Wall, Recessed	<b>Emission:</b>	Direct
<b>Environment:</b>	Indoor		

### DIMENSIONS

<b>Length:</b>	cm 117.6
<b>Width:</b>	cm 2.7
<b>Height:</b>	cm 5.4
<b>Weight:</b>	kg 1.7

### INCLUDED SOURCES

<b>Category:</b>	LED	<b>Color temperature (K):</b>	3000K
<b>Number:</b>	1	<b>Color Tolerance:</b>	MacAdam 2SDCM
<b>Watt:</b>	33W	<b>Service Life:</b>	L70 (6K) 50000h
<b>Type:</b>	0		

### LUMINAIRE

<b>Watt:</b>	33W	<b>Delivered lumens output (lm):</b>	2884lm
		<b>CCT:</b>	3000K
		<b>Efficiency:</b>	64%
		<b>Efficacy:</b>	87.41lm/W
		<b>CRI:</b>	80

### Notes

\*Uses 1 DALI address. Each module, angle and curved elements are provided with mechanical and electrical joints and installation accessories. 1 bracket for fixing to ceiling is included. End caps have to be ordered separately. Opal diffusing screen has to be ordered separately. Depending on the driver, the product can be undimmable or dimmable DALI.

**ACCESSORIES**


150W Ceiling  
power supply kit -  
351x61x111H -  
230VAC-48VDC  
IP20 -  
Undimmable -  
White  
AQ17901



150W Ceiling  
power supply kit -  
351x61x111H -  
230VAC-48VDC  
IP20 -  
Undimmable -  
Black  
AQ17904



240W Bare power  
supply + plug  
230VAC-48VDC  
IP20 -  
Undimmable (for  
dimnable version  
to be combined  
with "DALI-Selv  
interface")  
AQ18000



150W Bare power  
supply + plug  
230VAC-48VDC  
IP20 -  
Undimmable (for  
dimnable version  
to be combined  
with "DALI-Selv  
interface")  
AQ18100




Cap for cable -  
White  
AQ35301




A.24 - Wall/Ceiling  
Accessories -  
Insulating Spacer  
(1x) - White  
AQ35101




240W Ceiling  
power supply kit -  
321x91x111H -  
230VAC-48VDC  
IP20 - Dimmable  
DALI - White  
AQ17201



240W Ceiling  
power supply kit -  
321x91x111H -  
230VAC-48VDC  
IP20 - Dimmable  
DALI - Black  
AQ17204




A.24 - Opal  
Diffusing Screen -  
25m  
AQ16300



A.24 - Opal  
Diffusing Screen -  
50m  
AQ16400




A.24 - Remote Box  
Power Supply Kit -  
313x243x57,5h -  
(230VAC-48VDC  
240W DALI)  
AQ16000



A.24 - Opal  
Diffusing Screen -  
1176mm  
AQ16500



240W Recessed  
power supply kit -  
396x195x112H -  
230VAC-48VDC  
IP20 - DALI  
AQ16801



A.24 - Opal  
Diffusing Screen -  
3528mm  
AQ16700



240W Recessed  
power supply kit -  
396x195x112H -  
230VAC-48VDC  
IP20 -



240W Ceiling  
power supply kit -  
351x61x111H -  
230VAC-48VDC  
IP20 -  
Undimmable -  
White  
AQ17301



240W Ceiling  
power supply kit -  
351x61x111H -  
230VAC-48VDC  
IP20 -  
Undimmable -  
Black  
AQ17304




150W Ceiling  
power supply kit -  
321x91x111H -  
230VAC-48VDC  
IP20 - Dimmable  
DALI - White  
AQ17701



150W Ceiling  
power supply kit -  
321x91x111H -  
230VAC-48VDC  
IP20 - Dimmable  
DALI - Black  
AQ17704


Undimmable  
AQ17801



A.24 - Opal  
Diffusing Screen -  
10m  
AQ16200



A.24 - Wall/Ceiling  
Accessories - End  
Cap (2x) - White  
AQ35001



DALI to DALI-Selv  
Interface  
103x67x21H  
AQ18200



A.24 - Wall/Ceiling  
Accessories -  
Transition Cap -  
White  
AQ39401